

Power Supply Cord with Shako Power (Mains) Plug, Straight

new

CEE 7 / VII / DIN
49441-R2**Description**

Power Supply Cord, Protection class I, Pin temperature 70 °C, Cable

Approvals



- VDE License Number: 40015128

References[General Product Information](#)**Weblinks**[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [Distributor-Stock-Check](#), [Accessories](#)**Technical Data**

Ratings IEC	16A / 250VAC; 50Hz
Ratings UL/CSA	16A / 250VAC; 60Hz
Dielectric Strength	> 2 kVDC between L-N > 2 kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 20 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Terminal	moulded
Material: Housing	PVC, black or grey

Dimensions

36.6 mm

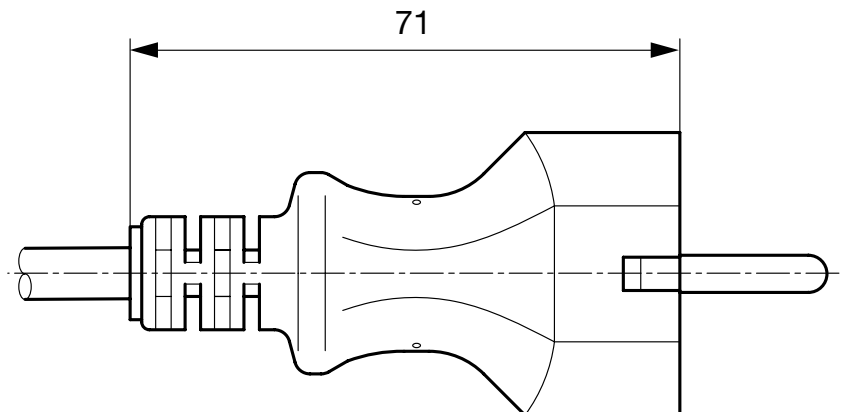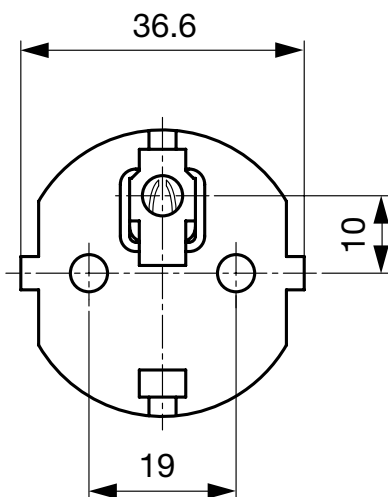

Config. Code

Product Configurator

4370 - R - Type - D - Length

The characters are placeholders for the correspondingly keys of selections from the key tables.
Typ steht für die Dose bzw. 2. Seite, Länge ist die Leitungslänge in mm.

4370 - R - Type - D - Length = cord type

cord type	Configuration key
H03VV-F 3G0,75mm ²	C
H05VV-F 3G0,75mm ²	G
H05RR-F 3G0,75mm ²	H
H05VV-F 3G1,0mm ²	I

Cord definition is detailed in general product information XXX

4370 - R - Type - D - Length = Cord end 2

Cord end 2
zzzz, 1654 , 2512 , 2530 , 3011 , 3012 , 3013 , 302U , 3020 , 3027 , 3030 , 311L , 312L

4370 - R - Type - D - Length = Color

Color	Configuration key
jet black; RAL9005	A
silver grey; RAL7001	B
light grey; RAL7035	C

standard color: black

4370 - R - Type - D - Length = Cord length

Cord length
zzzz, 000500, 001000, 001500, 002000, 002500, 003000, 005000

Cord length in mm

Packaging unit

100 Pcs