

### FEATURES

- ◆ Fast switching for high efficiency
- ◆ Low noise
- ◆  $T_{rr} = 20\text{ns}$
- ◆ Low reverse leakage current
- ◆ High voltage super FRD
- ◆ PFC application

### MECHANICAL DATA

- ◆ Case : Molded plastic TO-220AC / TO-220FP / SMC
- ◆ Epoxy : UL94V-0 rate flame retardant
- ◆ Terminals : Solderable per MIL-STD-202 method 208
- ◆ Mounting position : Any

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave , 60Hz , resistive or inductive load.  
For capacitive load , derate current by 20%

Symbol	Characteristics	CMPFCD86	Unit
		Rating	
$V_{RRM}$	Recurrent Peak Reverse Voltage	620	V
$V_{RMS}$	RMS Voltage	425	V
$V_{DC}$	DC Blocking Voltage	620	V
$I_{F(AV)}$	Average Forward Rectified Current @ $T_c=140^\circ\text{C}$	8.0	A
$I_{FSM}$	Peak Forward Surge Current 8.3ms single half sine-wave Super imposed on rated load (JEDEC Method)	150	A
$V_F$	Instantaneous Forward Voltage @8A	2.4	V
$I_R$	DC Reverse Current @ $T_J=25^\circ\text{C}$ At Rated DC Blocking Voltage @ $T_J=150^\circ\text{C}$	1.0	uA
		500	
$T_{rr}$	Maximum Reverse Recovery Time (note1)	20	nS
$C_J$	Typical Junction Capacitance (note2)	50	pF
$R_{\theta JC}$	Typical Thermal Resistance (note3)	2.2	°C / W
$T_J$	Operating Temperature Range	-65~175	°C
$T_{STG}$	Storage Temperature Range	-65~175	°C

- Notes :** 1. Reverse recovery test conditions  $I_F=0.5\text{A}$  ,  $I_R=1.0\text{A}$  ,  $I_{rr}=0.25\text{A}$   
2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts DC.  
3. Thermal Resistance junction to case.

### TYPICAL CHARACTERISTICS

FIG.1 - FORWARD CURRENT DERATING CURVE

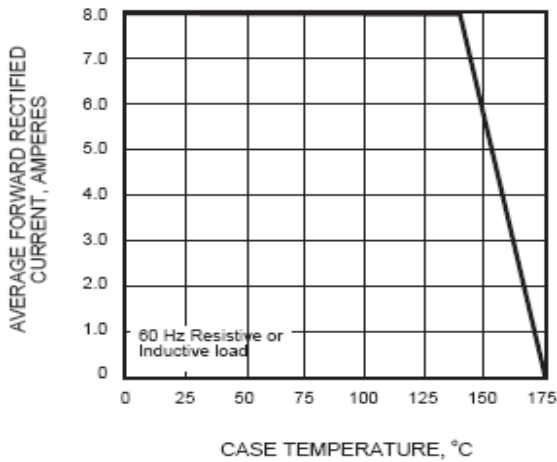


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

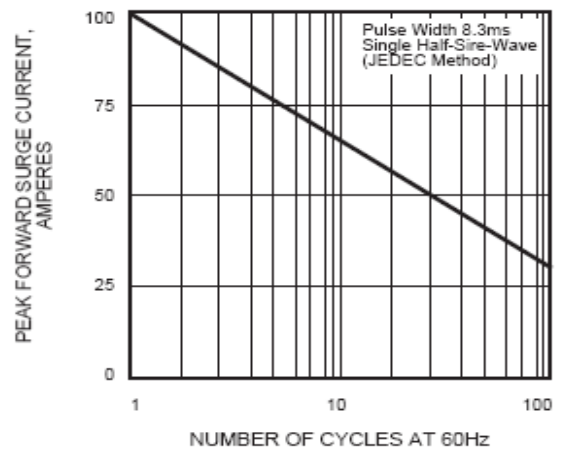


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

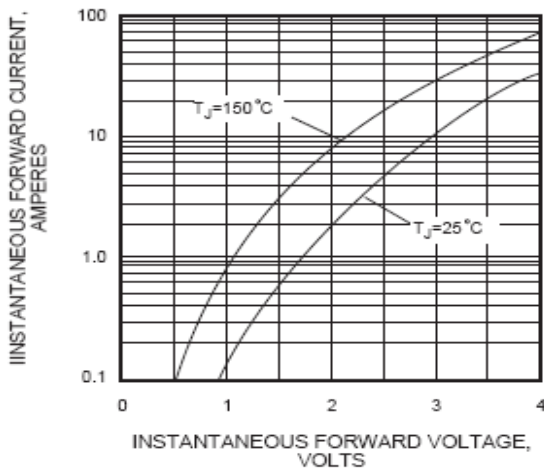


FIG.4 - TYPICAL REVERSE CHARACTERISTICS



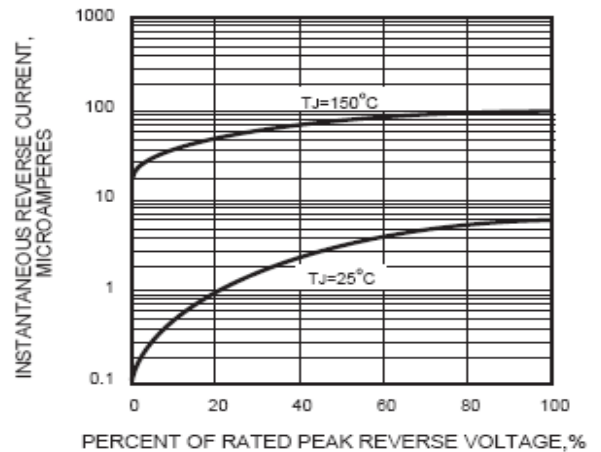


FIG.5 - TYPICAL JUNCTION CAPACITANCE

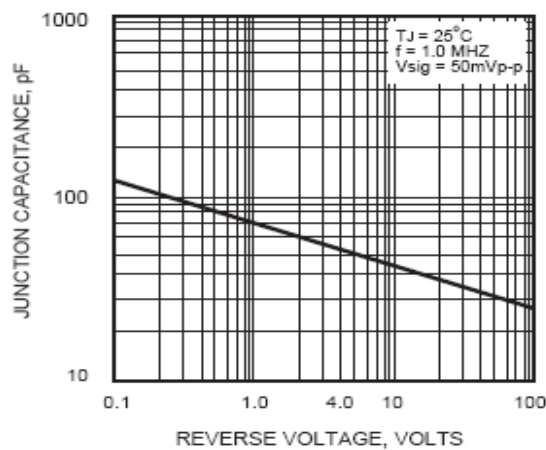


### Application Circuit

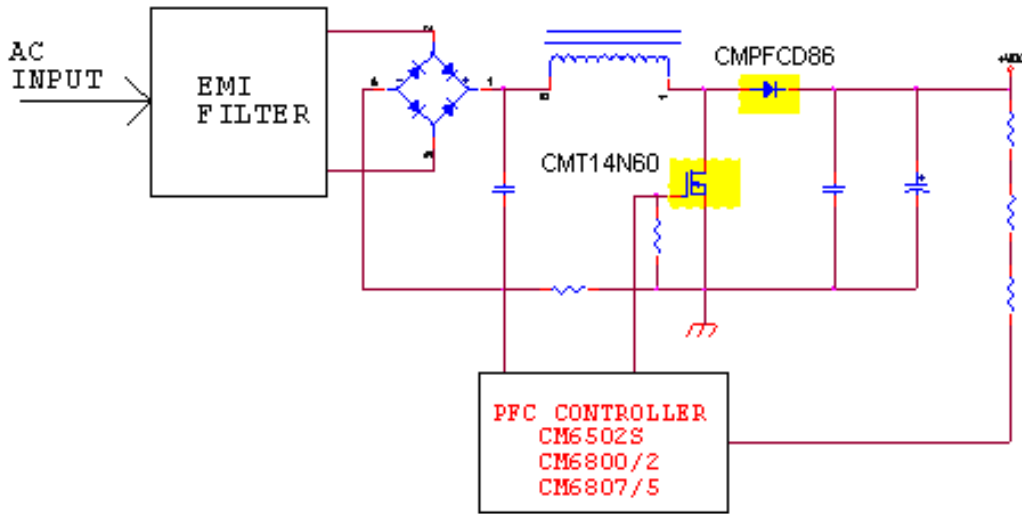


### PACKAGE DIMENSION

TO-220AC  
Dimensions in inches and (millimeters)

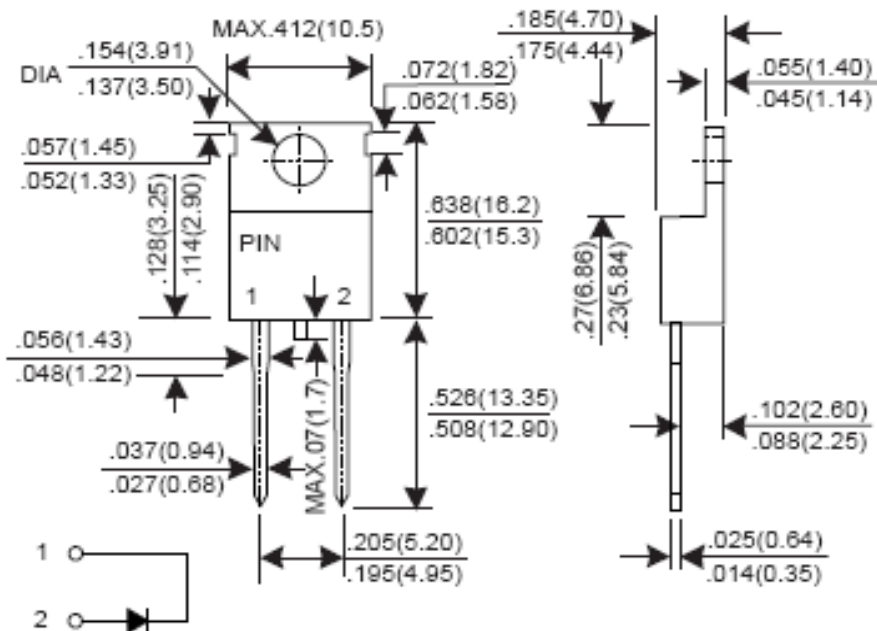

### TO-220FP


Dimensions in inches and (millimeters)

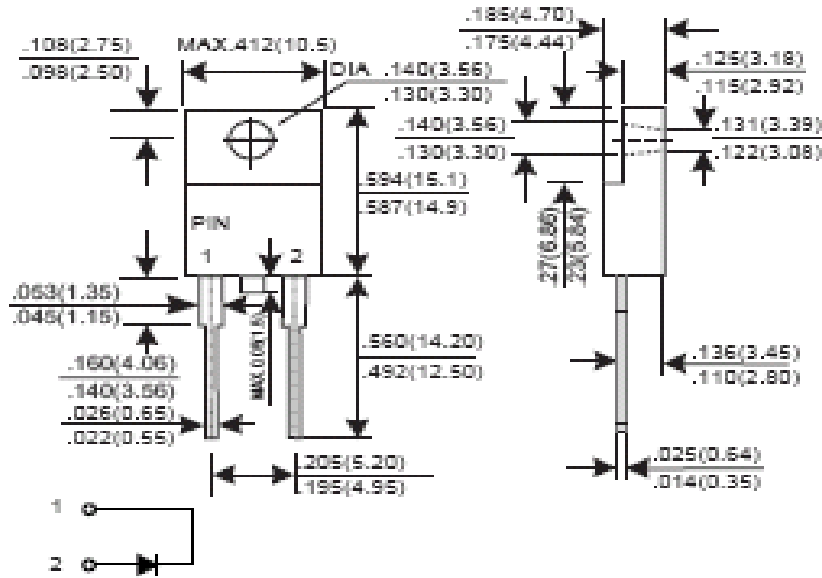

Dimensions in inches and (millimeters)

### SMC

Dimensions in inches and (millimeters)

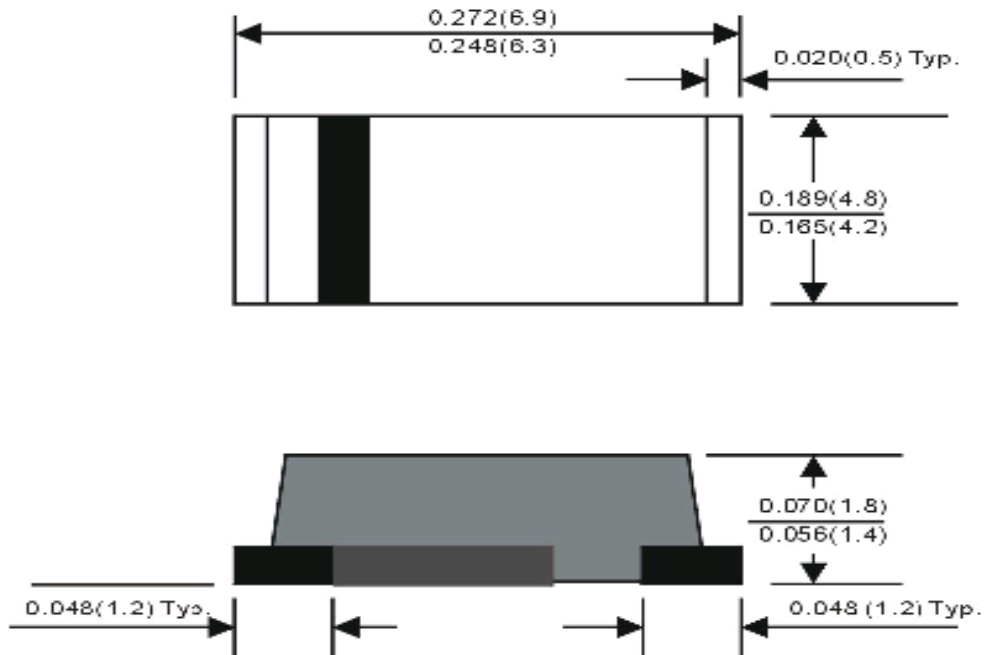

### IMPORTANT NOTICE

Champion Microelectronic Corporation (CMC) reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

A few applications using integrated circuit products may involve potential risks of death, personal injury, or severe property or environmental damage. CMC integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of CMC products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

#### HsinChu Headquarter

5F, No. 11, Park Avenue II,  
Science-Based Industrial Park,  
HsinChu City, Taiwan

T E L : +886-3-567 9979  
F A X : +886-3-567 9909  
<http://www.champion-micro.com>

#### Sales & Marketing

21F., No. 96, Sec. 1, Sintai 5th Rd., Sijhih City,  
Taipei County 22102,  
Taiwan R.O.C

T E L : +886-2-2696 3558  
F A X : +886-2-2696 3559