


**■Features**



- High Luminous Super Flux Output
- 4.55  $\phi$  Standard Directivity
- Long Lifetime Operation
- Low Thermal Resistance
- Superior Weather-Resistance
- UV Resistant Epoxy
- Water Clear Type

**■Applications**

- Interior and exterior automotive lighting  
(e.g. dashboard backlighting etc.)
- Backlighting (Illuminated advertising, general lighting, etc)
- Decorative Lighting
- Other Lighting

**■Outline Dimension**


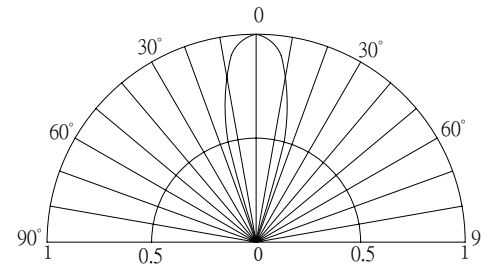
Unit:mm  
Tolerance: $\pm 0.3$ mm  
1,4 Anode  
2,3 Cathode


**■Absolute Maximum Rating**

(Ta=25°C)

Item	Symbol	Value	Unit
DC Forward Current	$I_F$	50	mA
Pulse Forward Current*	$I_{FP}$	100	mA
Reverse Voltage	$V_R$	5	V
Power Dissipation	$P_D$	180	mW
Operating Temperature	$T_{opr}$	-30 ~ +85	°C
Storage Temperature	$T_{stg}$	-40 ~ +100	°C
Lead Soldering Temperature	$T_{sol}$	260 °C / 5sec	-

\*Pulse width Max.10ms , Duty ratio max 1/10

**■Directivity**

**■Electrical -Optical Characteristics**

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	$V_F$	$I_F=30$ mA	2.9	3.1	3.6	V
DC Reverse Current	$I_R$	$V_R=5$ V	-	-	10	$\mu$ A
Domi. Wavelength*	$\lambda_D$	$I_F=20$ mA	520	525	530	nm
Luminous Intensity*	$I_v$	$I_F=30$ mA	20000	25000	-	mcd
50% Power Angle	$2\theta_{1/2}$	$I_F=30$ mA	-	30	-	deg

 \*1 Tolerance of dominant wavelength is  $\pm 1$ nm

 \*2 Tolerance of luminous intensity is  $\pm 15$ %