



### 1. Dimensions:

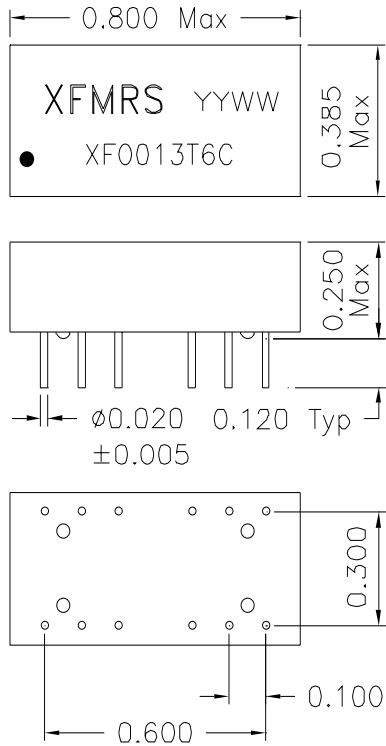

### 2. Schematic:

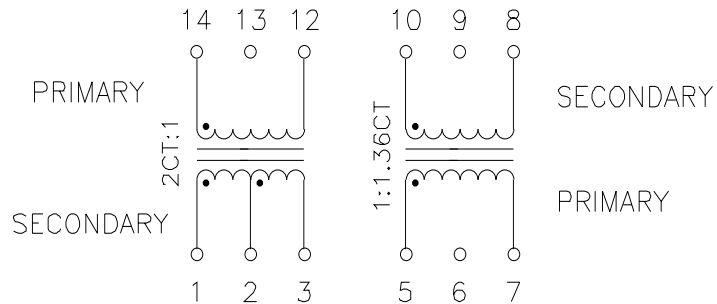

### 3. Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms

Turns Ratio: (14-12):(1-2-3)=1:2CT ±3%

Turns Ratio: (5-7):(10-8)=1:1.36 ±3%

PRI OCL: 1.2mH Min. @100KHz 50mV

Cw/w: 35pF Maximum @100KHz 50mV (PRI/SEC)

PIN14-12 LL: 0.5uH Maximum @100KHz 50mV

@PIN1-3 SHORTED

PIN5-7 LL: 0.8uH Maximum @100KHz 50mV

@PIN10-8 SHORTED

PRI DC Resistance: 0.80 Ohms Maximum

PIN1-3 DC Resistance: 1.2 Ohms Maximum

PIN10-8 DC Resistance: 1.0 Ohms Maximum

CMRR: @1MHz 50dB Typ.

DOC. REV A/1

<b>XFMRS Inc</b>		Title: T1/CEPT/ISDN-Pri MAGNETICS	
UNLESS OTHERWISE SPECIFIED		P/N: XF0013T6C	REV. A
TOLERANCES: .xxx ±0.010		DWN.	廖玉坤 Sep-02-99
Dimensions in Inch		CHK.	李清儿 Sep-02-99
SHEET 1 OF 1		APP.	Joe Huff Sep-02-99