
## HIGH CURRENT SINGLE-PHASE SILICON BRIDGE RECTIFIERS

### **Features**

- Surge overload 300 Amperes peak
- Low power loss, high efficiency
- Low reverse leakage current.

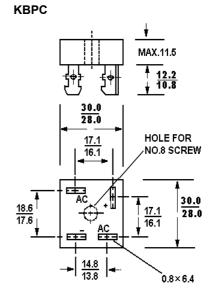

**Dimensions in mm** 

## **Absolute Maximum Ratings and Characteristics**

Rating at 25°C ambient temperature unless otherwise specified. resistive or inductive load 60 Hz,. For capacitive load current by 20%.

or capacitive load current by 20 %.								
Characteristic	KBPC	KBPC	KBPC	KBPC	KBPC	KBPC	KBPC	Units
	15005	1501	1502	1504	1506	1508	1510	Units
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified  Current at T <sub>C</sub> = 55 °C	15							Α
Peak Forward Surge Current, 8.3ms single half Sine-wave superimposed on rated load (JEDEC)	300							А
Maximum Forward Voltage at 7.5A DC and 25 $^{\circ}\!$	1.2							V
Maximum Reverse Current at T <sub>A</sub> = 25°C	10							uA
at Rated DC Blocking Voltage T <sub>A</sub> = 125°C	1000							
Typical Junction Capacitance (Note 1)	300							pF
Typical Thermal Resistance (Note 2)	2.3							°C/W
Operating Temperature Range T <sub>C</sub>	-55 to +125							°C
Storage Temperature Range T <sub>A</sub>	-55 to +150							°C

Notes: 1. Measured at 1MHz and applied reverse voltage of 4VDC.

2. Thermal resistance from junction to case per leg.



# SEMTECH ELECTRONICS LTD.













Dated : 19/07/2005

### **RATINGS AND CHARACTERISTIC CURVES**

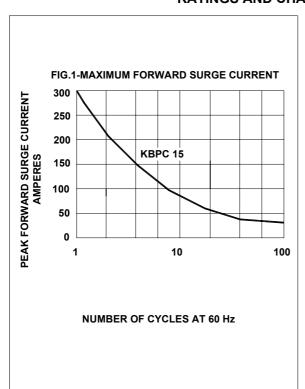

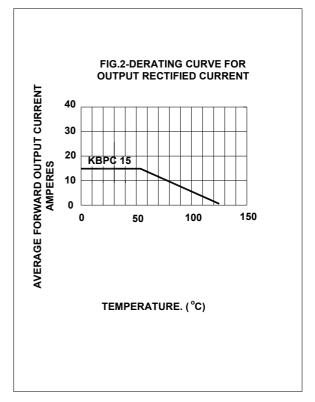

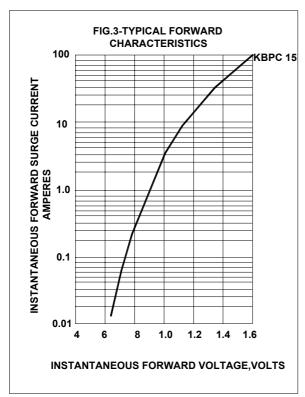

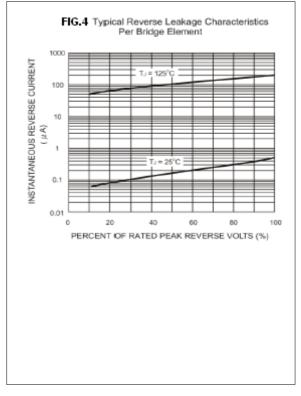







MOODY





(Subsidiary of Semtech International Holdings Limited, acompany listed on the Hong Kong Stock Exchange, Stock Code: 724)