



6 Lake Street
PO Box 1436
Lawrence, MA
USA 01841

Telephone (617) 681-0392 • TeleFax (617) 681-9135 • Telex 928377

GOLD BONDED DIODES

TYPE 1N60A

FEATURES

- Low forward voltage drop**
—low power consumption
- Thirty years of proven reliability**
—one million hours mean time between failures (MTBF)
- Very low noise level**
- Metallurgically bonded**

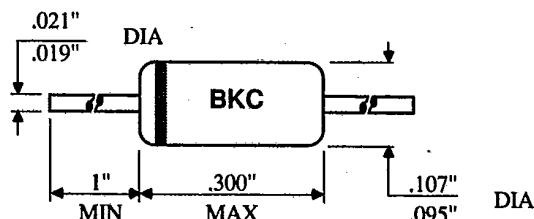
ABSOLUTE MAXIMUM RATINGS

Peak Inverse Voltage	30V	@ 25 °C
Peak Forward Current	150mA	unless
Operating Temperature Range	-65°C to 85°C	otherwise
Average Power Dissipation	80mW	specified

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min.	Max.	Unit	T °C
Peak Inverse Voltage	PIV	1mA	30		V	25°
Inverse Current	Ir	10V		65	uA	25°
Forward Voltage	Vf	5mA		1.0	V	25°

MECHANICAL



Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N61**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES**

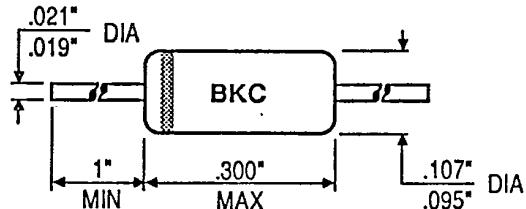
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	130 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	130		V	25 °C
Reverse Current	Ir	100 V		300	µA	25 °C
Reverse Current	Ir	125 V		700	µA	°C
Forward Voltage	Vf	5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N62**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

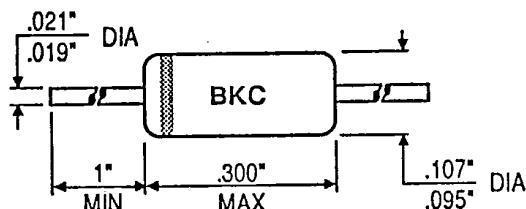
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	110 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	110		V	25 °C
Reverse Current	Ir	125 V		700	µA	25 °C
Forward Voltage	Vf	5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

T-01-07

Type No. 1N63

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

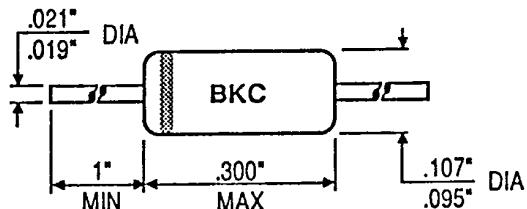
ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	125 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	125		V	25 °C
Reverse Current	Ir	50 V		50	µA	25 °C
Forward Voltage	Vf	4 mA		1	V	25 °C

MECHANICAL



Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N63A**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

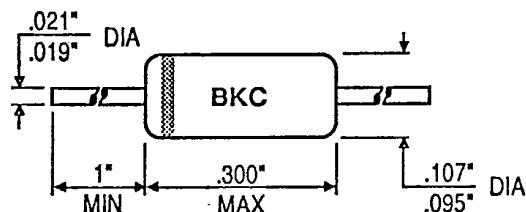
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	Ir	50 V		50	µA	25 °C
Forward Voltage	Vf	4 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N65

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

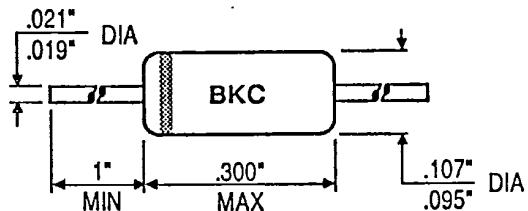
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	85 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	85		V	25 °C
Reverse Current	Ir	50 V		200	µA	25 °C
Forward Voltage	Vf	2.5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N66

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

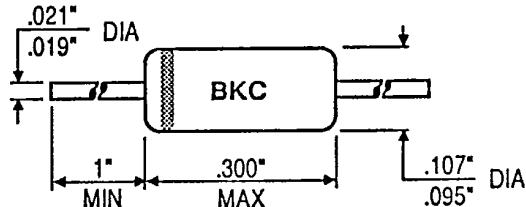
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	60 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	60		V	25 °C
Reverse Current	Ir	10 V		50	µA	25 °C
Reverse Current	Ir	50 V		800	µA	°C
Forward Voltage	Vf	5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N66A**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**BKC International
Electronics Inc.****FEATURES**

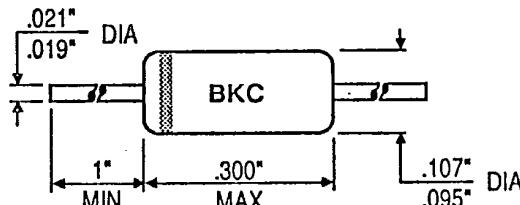
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	60 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	60		V	25 °C
Reverse Current	Ir	10 V		50	µA	25 °C
Forward Voltage	Vf	5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N67**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

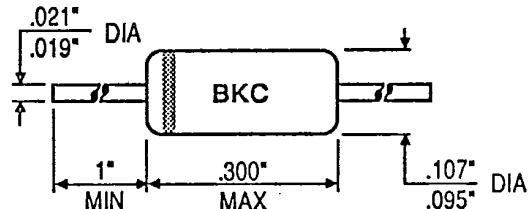
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	80 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	80		V	25 °C
Reverse Current	Ir	5 V		5	µA	25 °C
Forward Voltage	Vf	4 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N67A

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

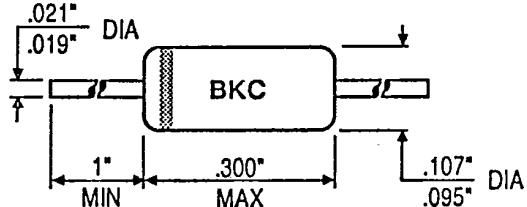
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	Ir	5 V		5	µA	25 °C
Reverse Current	Ir	50 V		50	µA	°C
Forward Voltage	Vf	4 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N68**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**BKC International
Electronics Inc.****FEATURES**

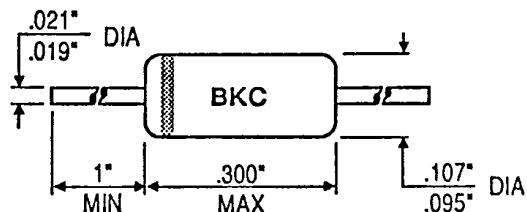
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	Ir	100 V		625	µA	25 °C
Forward Voltage	Vf	3 mA		1	V	25 °C

MECHANICAL

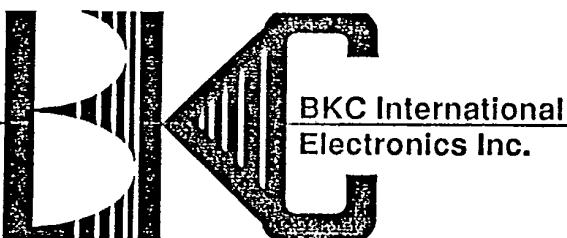
Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N68A

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES**

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

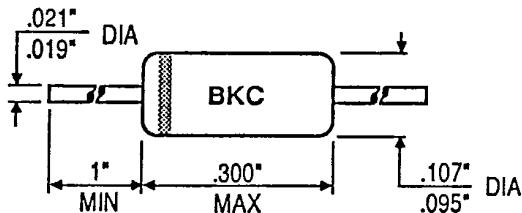
Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	130 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	130		V	25 °C
Reverse Current	Ir	100 V		625	µA	25 °C
Forward Voltage	Vf	3 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N69

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

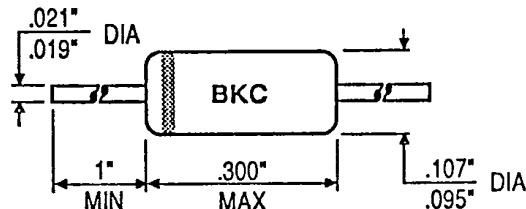
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	75 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	75		V	25 °C
Reverse Current	Ir	10 V		50	µA	25 °C
Reverse Current	Ir	50 V		850	µA	°C
Forward Voltage	Vf	5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N69A

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

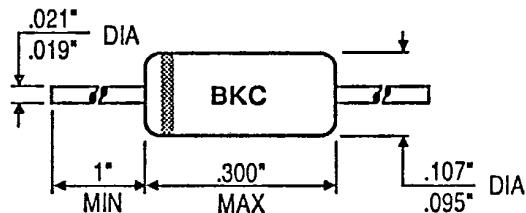
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	75 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	75		V	25 °C
Reverse Current	Ir	10 V		30	µA	25 °C
Reverse Current	Ir	50 V		500	µA	°C
Forward Voltage	Vf	5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N70

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

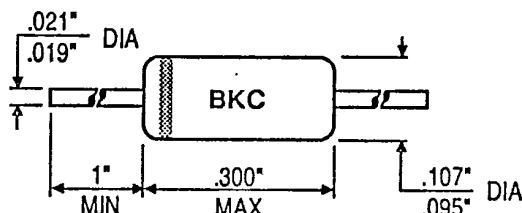
Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	125 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	125		V	25 °C
Reverse Current	Ir	10 V	25		µA	25 °C
Reverse Current	Ir	50 V	300		µA	°C
Forward Voltage	Vf	3 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N70A

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

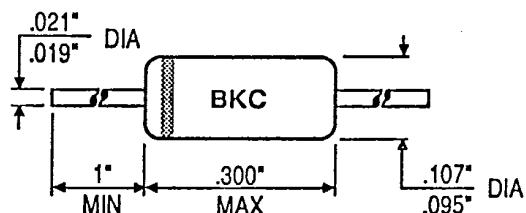
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	125 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	125		V	25 °C
Reverse Current	Ir	10 V		25	µA	25 °C
Reverse Current	Ir	50 V		300	µA	°C
Forward Voltage	Vf	3 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N71

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

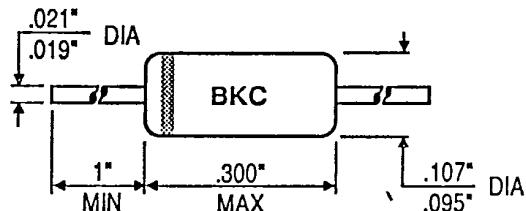
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	40 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	40		V	25 °C
Reverse Current	Ir	30 V		300	µA	25 °C
Forward Voltage	Vf	15 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N75**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

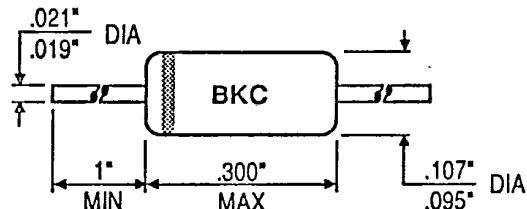
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	125 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	125		V	25 °C
Reverse Current	Ir	50 V		50	µA	25 °C
Forward Voltage	Vf	2.5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N81

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

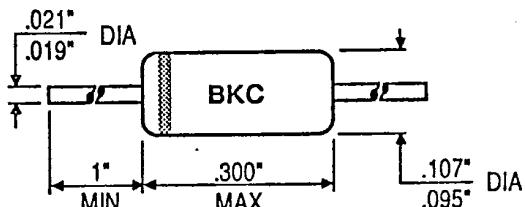
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	50 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	50		V	25 °C
Reverse Current	Ir	10 V		10	µA	25 °C
Forward Voltage	Vf	3 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N81A

T-01-07

GOLD BONDED GERMANIUM DIODE

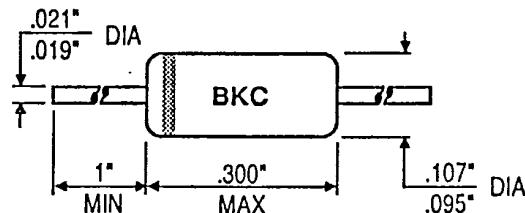
6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES****Low forward voltage drop—low power consumption****Thirty years of proven reliability—one million hours mean time between failures (MTBF)****Very low noise level****Metallurgically bonded****ABSOLUTE MAXIMUM RATINGS** (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	50 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	50		V	25 °C
Reverse Current	Ir	10 V	10		µA	25 °C
Forward Voltage	Vf	3 mA	1		V	25 °C

MECHANICAL

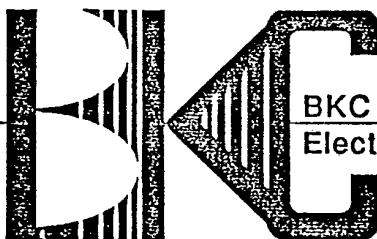
Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N84

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

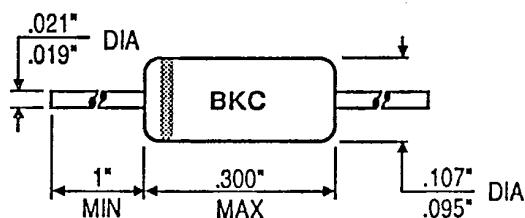
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	12 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	12		V	25 °C
Reverse Current	Ir	5 V		100	µA	25 °C
Forward Voltage	Vf	60 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N86

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

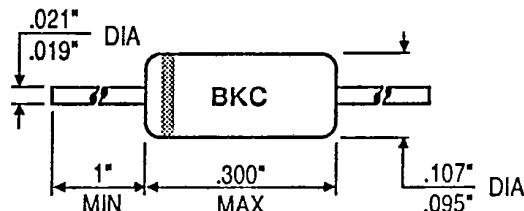
Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	70 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	70		V	25 °C
Reverse Current	Ir	10 V	50		µA	25 °C
Reverse Current	Ir	50 V	833		µA	°C
Forward Voltage	Vf	4 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N87A**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES**

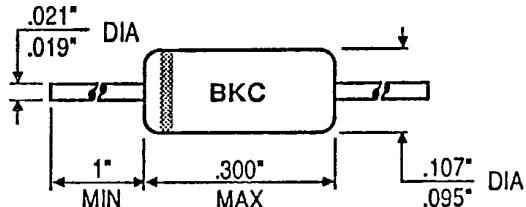
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	22.5 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	22.5		V	25 °C
Reverse Current	Ir	V			µA	25 °C
Forward Voltage	Vf	.1 mA		.25	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N88**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

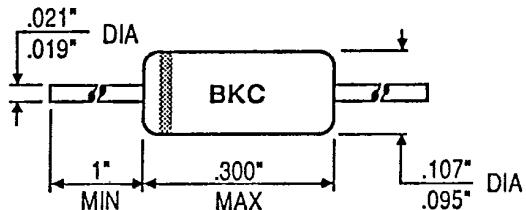
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	85 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	85		V	25 °C
Reverse Current	Ir	50 V	100		µA	25 °C
Forward Voltage	Vf	2.5 mA	1		V	25 °C

MECHANICAL

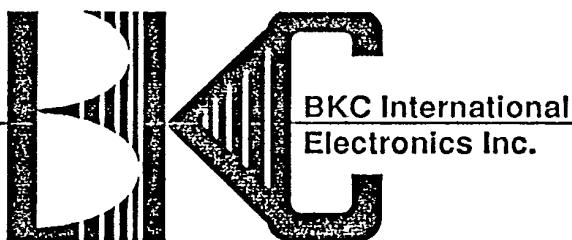
Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N89

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES**

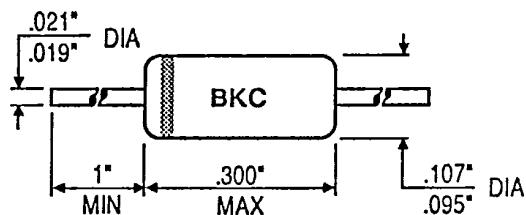
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	Ir	5 V		8	µA	25 °C
Forward Voltage	Vf	3.5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N90**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

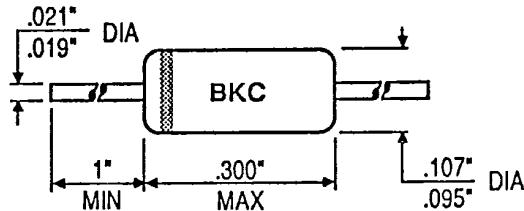
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	75 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	75		V	25 °C
Reverse Current	Ir	50 V		800	µA	25 °C
Forward Voltage	Vf	5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N95**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

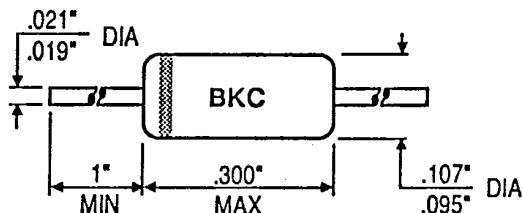
Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	75 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	75		V	25 °C
Reverse Current	Ir	50 V		800	µA	25 °C
Forward Voltage	Vf	10 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N96**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

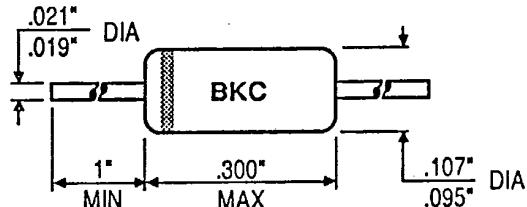
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	75 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	75		V	25 °C
Reverse Current	Ir	50 V	800		µA	25 °C
Forward Voltage	Vf	20 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N96A**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

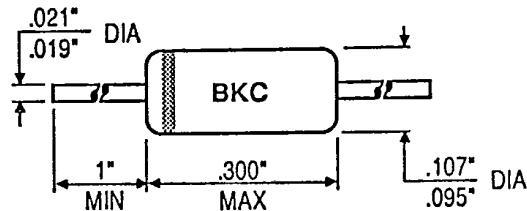
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	60 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	60		V	25 °C
Reverse Current	Ir	50 V		500	µA	25 °C
Forward Voltage	Vf	40 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N97**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

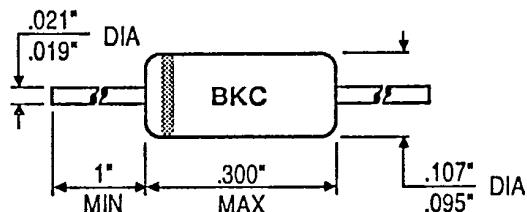
Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	Ir	50 V		100	µA	25 °C
Forward Voltage	Vf	10 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N98**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

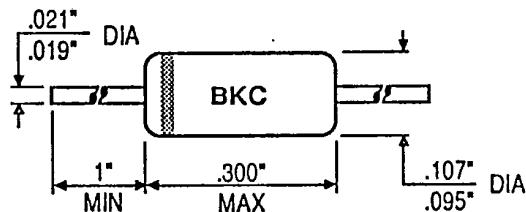
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	Ir	50 V		100	µA	25 °C
Forward Voltage	Vf	20 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N98A**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES**

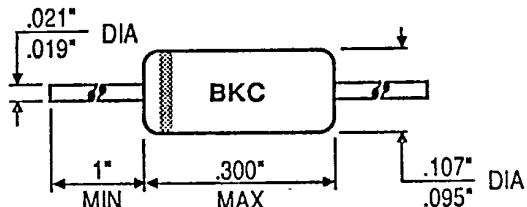
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	250 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	250		V	25 °C
Reverse Current	Ir	50 V		100	µA	25 °C
Forward Voltage	Vf	40 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N99**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

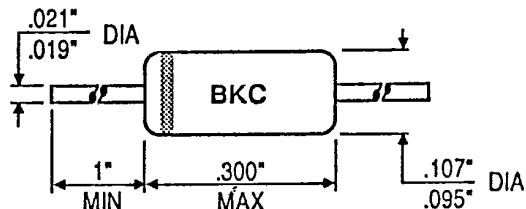
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	Ir	50 V	50		µA	25 °C
Forward Voltage	Vf	10 mA	1		V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N100**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

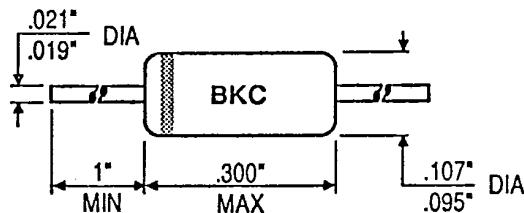
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	Ir	50 V		5	µA	25 °C
Forward Voltage	Vf	20 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

BKC INTERNATIONAL ELECTRONICS, INC.
6 LAKE STREET, LAWRENCE, MA 01841
TEL NO. (508) 681-0392

ENGINEERING DATA SHEET

TYPE

1N100A

GOLD BONDED, GERMANIUM, DIODE

ABSOLUTE MAXIMUM RATINGS

PEAK REVERSE VOLTAGE	100V
CONTINUOUS INVERSE OPERATING VOLTAGE	80V
RECURRENT PEAK FORWARD (60 CYCLES, 1/2 WAVE)	250mA
FORWARD SURGE CURRENT (1 SECOND)	400mA
POWER DISSIPATION	80mW
DERATING FACTOR ABOVE +25 DEGREES CELSIUS	10mW/10 DEGREES CELSIUS
OPERATING TEMPERATURE	-78 TO +90 DEGREES CELSIUS
STORAGE TEMPERATURE	-78 TO +100 DEGREES CELSIUS

CHARACTERISTICS

PARA	VF	IR	IR	PIV
COND	40mA	5V	50V	1mA
TA	25C	25C	25C	25C
LIMITS				
MIN.	---	---	---	100V
MAX.	1V	5uA	50uA	---

PACKAGE CONFIGURATION

GLASS CASE JEDEC DO-7
(INCHES)
LEAD LENGTH 1.125 MAX
LEAD DIAMETER .020 +- .002
BODY LENGTH .270 MAX.
BODY DIAMETER .095 MAX.

MARKING

BLACK CATHODE BAND & BLACK DIGITAL PRINT

Type No. 1N102**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES**

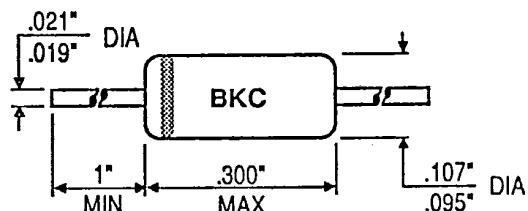
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	125 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

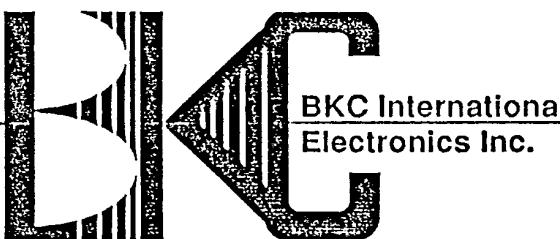
	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	125		V	25 °C
Reverse Current	Ir	25 V		3	µA	25 °C
Forward Voltage	Vf	15 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N103**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES**

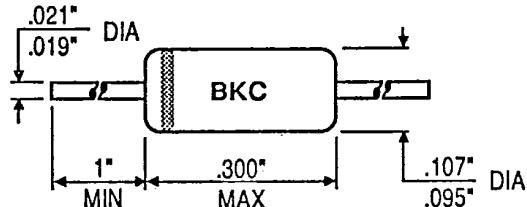
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	12 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	12		V	25 °C
Reverse Current	Ir	5 V		100	µA	25 °C
Forward Voltage	Vf	30 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N104**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

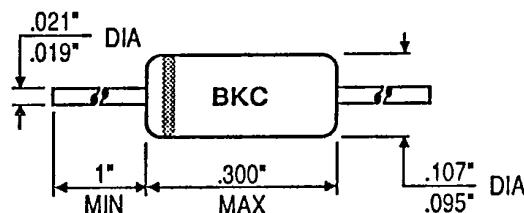
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	12 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	12		V	25 °C
Reverse Current	Ir	5 V		100	µA	25 °C
Forward Voltage	Vf	30 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N107**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

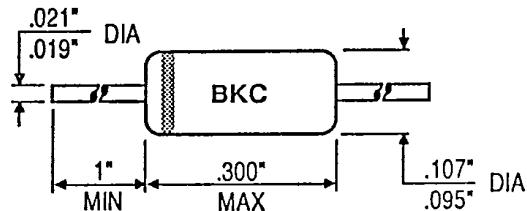
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	10 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	10		V	25 °C
Reverse Current	Ir	10 V		200	µA	25 °C
Forward Voltage	Vf	150 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N108**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

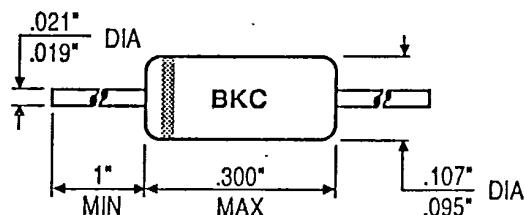
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	50 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	50		V	25 °C
Reverse Current	Ir	50 V		200	µA	25 °C
Forward Voltage	Vf	50 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N111

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

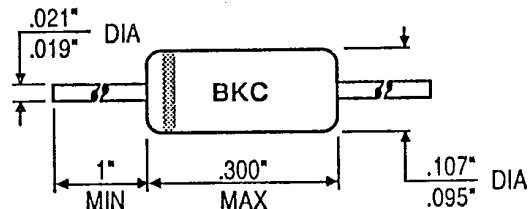
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	70 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	70		V	25 °C
Reverse Current	Ir	10 V	25		µA	55 °C
Reverse Current	Ir	50 V	125		µA	55 °C
Forward Voltage	Vf	5 mA	1		V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N112

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

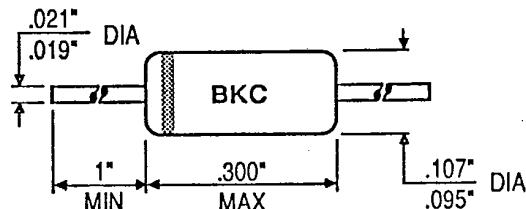
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	70 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	70		V	25 °C
Reverse Current	Ir	10 V	50		µA	55 °C
Reverse Current	Ir	50 V	250		µA	55 °C
Forward Voltage	Vf	5 mA	1		V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N113**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

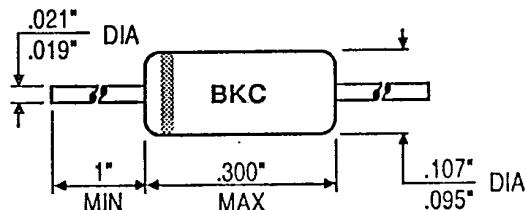
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	70 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	70		V	25 °C
Reverse Current	Ir	10 V	25		µA	55 °C
Reverse Current	Ir	50 V	125		µA	55 °C
Forward Voltage	Vf	2.5 mA	1		V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N114

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

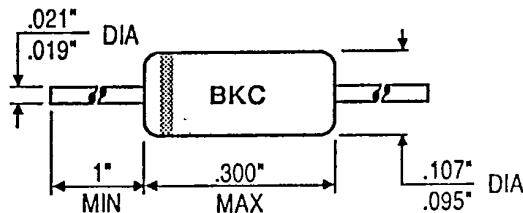
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	70 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	70		V	25 °C
Reverse Current	Ir	10 V		50	µA	55 °C
Reverse Current	Ir	50 V		500	µA	55 °C
Forward Voltage	Vf	2.5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N115

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

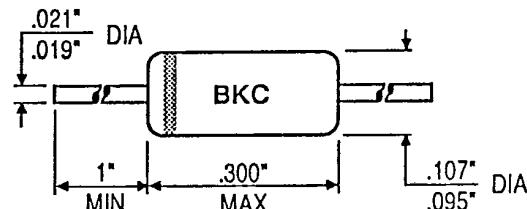
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	70 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	70		V	25 °C
Reverse Current	Ir	10 V		100	µA	55 °C
Reverse Current	Ir	50 V		500	µA	55 °C
Forward Voltage	Vf	2.5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N116*T-01-07***GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

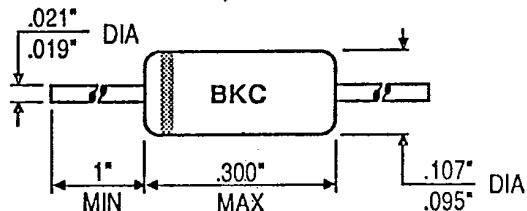
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	75 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	75		V	25 °C
Reverse Current	Ir	50 V		100	µA	25 °C
Forward Voltage	Vf	5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N117

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

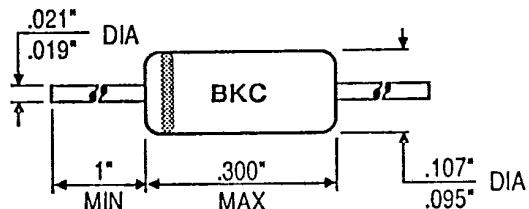
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	75 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	75		V	25 °C
Reverse Current	Ir	50 V		100	µA	25 °C
Forward Voltage	Vf	10 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

T-01-07

Type No. 1N118**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

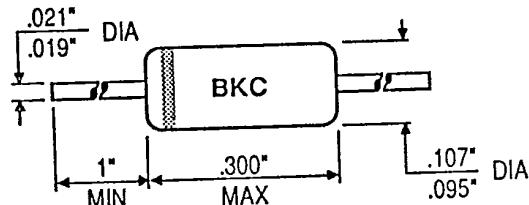
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	75 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	75		V	25 °C
Reverse Current	Ir	50 V		100	µA	25 °C
Forward Voltage	Vf	20 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N118A**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

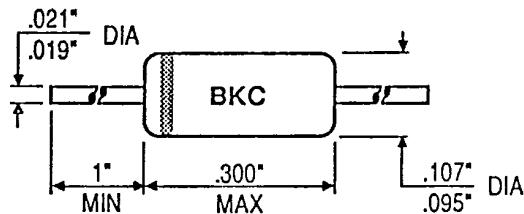
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	75 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	75		V	25 °C
Reverse Current	Ir	50 V		100	µA	25 °C
Forward Voltage	Vf	40 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N119

T-03-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

Metallurgically bonded

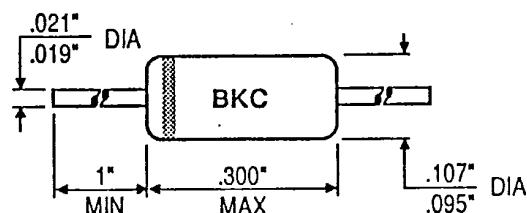
ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	60 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	60		V	25 °C
Reverse Current	Ir	50 V		125	µA	55 °C
Forward Voltage	Vf	5 mA		1	V	25 °C
Reverse Recovery	Tr	See note		500		

NOTE: If = 30, Vr = -35, Recover to 50 kΩ.

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N120

T-03-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

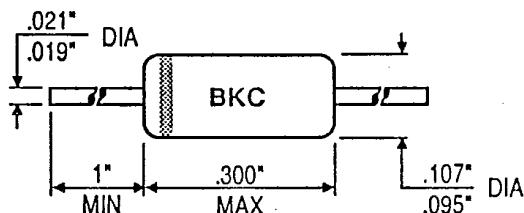
ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	60 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	60		V	25 °C
Reverse Current	Ir	50 V		250	µA	55 °C
Forward Voltage	Vf	5 mA		1	V	25 °C
Reverse Recovery	Trr	See note		500		

NOTE: If = 30, Vr = -35, Recover to 50 kΩ.

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N126

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

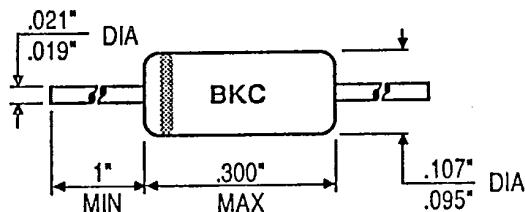
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	75 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	75		V	25 °C
Reverse Current	Ir	10 V		50	µA	25 °C
Reverse Current	Ir	50 V		800	µA	°C
Forward Voltage	Vf	5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N126A

T-01-07

GOLD BONDED GERMANIUM DIODE

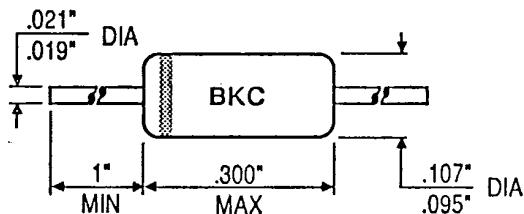
6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES****Low forward voltage drop—low power consumption****Thirty years of proven reliability—one million hours mean time between failures (MTBF)****Very low noise level****Metallurgically bonded****ABSOLUTE MAXIMUM RATINGS** (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	75 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	75		V	25 °C
Reverse Current	Ir	10 V	50		µA	25 °C
Reverse Current	Ir	50 V	850		µA	°C
Forward Voltage	Vf	25 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N127

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

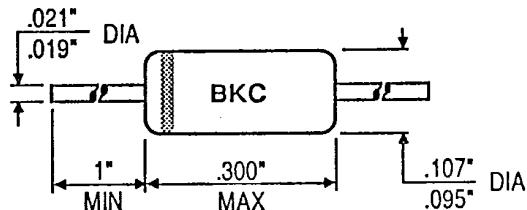
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	125 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	125		V	25 °C
Reverse Current	Ir	10 V		25	µA	25 °C
Reverse Current	Ir	50 V		300	µA	°C
Forward Voltage	Vf	3 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N127A

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

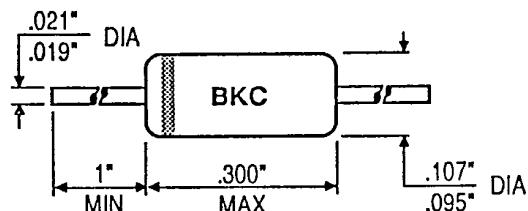
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	125 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	125		V	25 °C
Reverse Current	Ir	10 V		25	µA	25 °C
Reverse Current	Ir	50 V		300	µA	°C
Forward Voltage	Vf	25 mA		1	V	25 °C

MECHANICAL

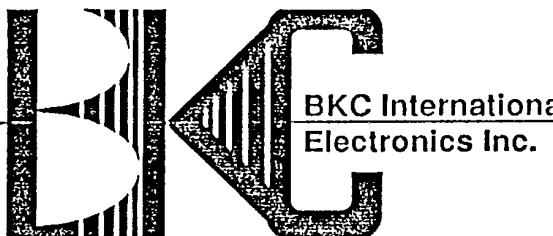
Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N128

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES**

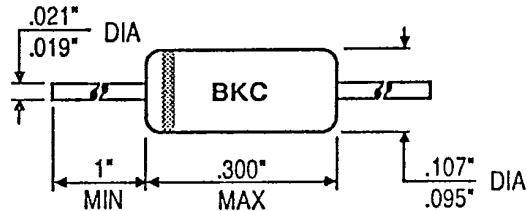
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	50 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	50		V	25 °C
Reverse Current	Ir	10 V		10	µA	25 °C
Forward Voltage	Vf	3 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N128A**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES**

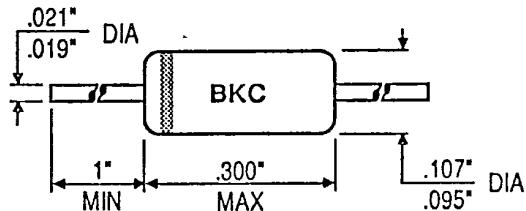
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	50 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	50		V	25 °C
Reverse Current	Ir	10 V		10	µA	25 °C
Forward Voltage	Vf	3 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N133T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



BKC International
Electronics Inc.

FEATURES

- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

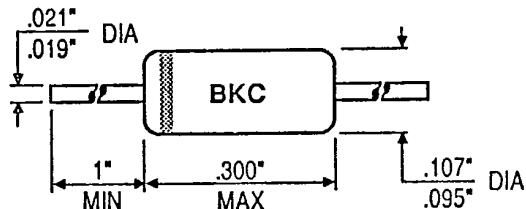
ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	5 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	5		V	25 °C
Reverse Current	Ir	.6 V		300	µA	25 °C
Forward Voltage	Vf	3 mA		.5	V	25 °C

MECHANICAL




Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N139

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

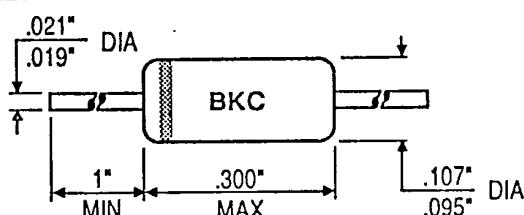
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	50 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	50		V	25 °C
Reverse Current	Ir	50 V		1500	µA	25 °C
Forward Voltage	Vf	20 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N140

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES**

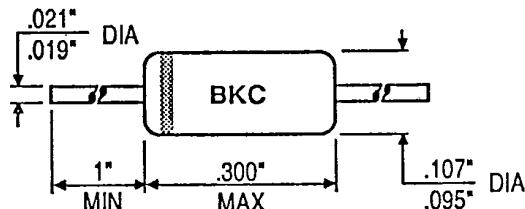
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	85 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	85		V	25 °C
Reverse Current	Ir	50 V		300	µA	25 °C
Forward Voltage	Vf	40 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N141**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

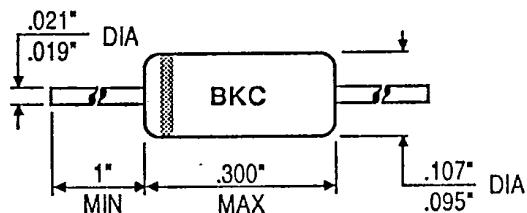
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	85 Volts
Peak Forward Current	500 mA
Operating Temperature Range	-65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	85		V	25 °C
Reverse Current	Ir	50 V		50	µA	25 °C
Forward Voltage	Vf	20 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N142**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
 PO Box 1436
 Lawrence, MA 01841
 Telephone (617) 681-0392
 TeleFax (617) 681-9135
 Telex 928377



**BKC International
Electronics Inc.**

FEATURES

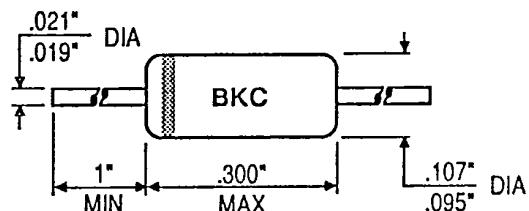
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	125 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	125		V	25 °C
Reverse Current	Ir	100 V		100	µA	25 °C
Forward Voltage	Vf	5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N143**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES**

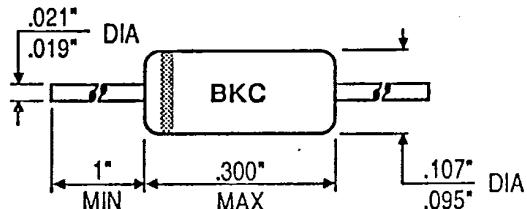
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	125 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	125		V	25 °C
Reverse Current	Ir	100 V	100		µA	25 °C
Forward Voltage	Vf	40 mA	1		V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N144**T-01-07****GOLD BONDED GERMANIUM DIODE**

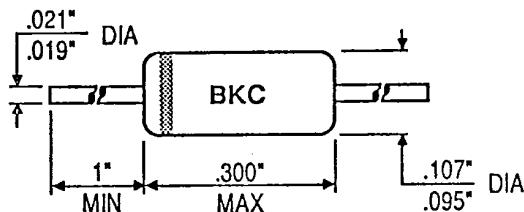
6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**FEATURES****Low forward voltage drop—low power consumption****Thirty years of proven reliability—one million hours mean time between failures (MTBF)****Very low noise level****Metallurgically bonded****ABSOLUTE MAXIMUM RATINGS** (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	30 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	30		V	25 °C
Reverse Current	Ir	100 V		200	µA	25 °C
Forward Voltage	Vf	100 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N145**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

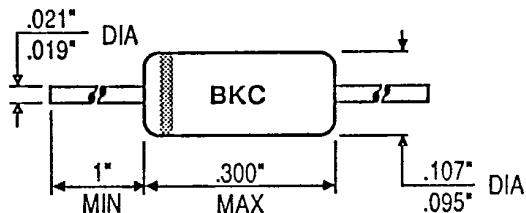
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	30 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	'1 mA	30		V	25 °C
Reverse Current	Ir	10 V		100	µA	25 °C
Forward Voltage	Vf	40 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N191

T-03-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability**—one million hours mean time between failures (MTBF)
- Very low noise level**
- Metallurgically bonded**

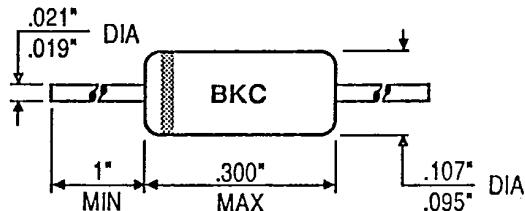
ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	90 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	90		V	25 °C
Reverse Current	Ir	10 V		25	µA	25 °C
Reverse Current	Ir	50 V		125	µA	55 °C
Forward Voltage	Vf	5 mA		1	V	25 °C
Reverse Recovery	Tr	See Note		500	n Sec	

Note: If = 30, Vr = -35, Recover to 50 kΩ.

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N192

T-03-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

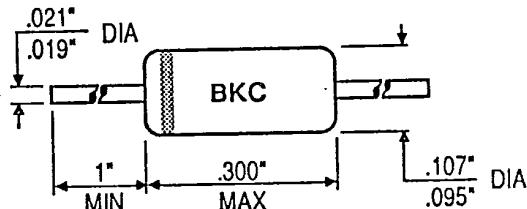
ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	70 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	70		V	25 °C
Reverse Current	Ir	10 V	20		µA	25 °C
Reverse Current	Ir	70 V	50		µA	50 °C
Forward Voltage	Vf	5 mA	1		V	25 °C
Reverse Recovery	Trr	See Note		500	n Sec	

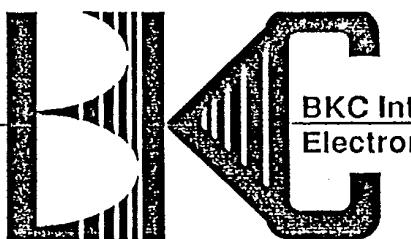
Note: If = 30, Vr = -35, Recover to 50 kΩ.

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N195T-01-07**GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

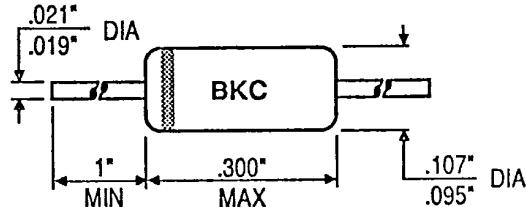
- Low forward voltage drop—low power consumption
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)
- Very low noise level
- Metallurgically bonded

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	40 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	40		V	25 °C
Reverse Current	Ir	40 V		10	µA	25 °C
Forward Voltage	Vf	2 mA		2	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N198

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

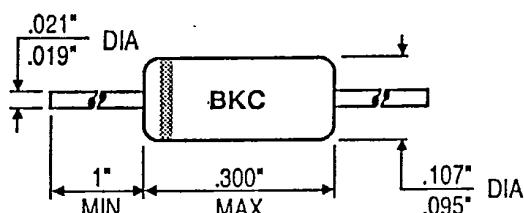
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	80 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	80		V	25 °C
Reverse Current	Ir	10 V		10	µA	25 °C
Reverse Current	Ir	50 V		250	µA	75 °C
Forward Voltage	Vf	4 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N198A

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

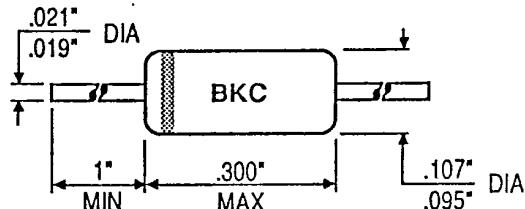
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	Ir	10 V	10		µA	25 °C
Reverse Current	Ir	10 V	75		µA	75 °C
Forward Voltage	Vf	4 mA	1		V	25 °C

MECHANICAL

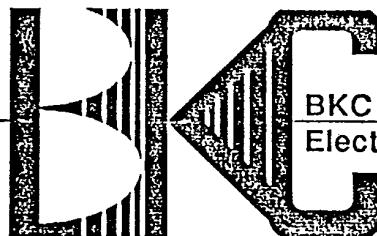
Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N198B

T-03-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

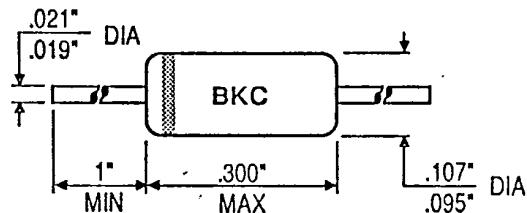
ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	Ir	50 V	50		µA	25 °C
Reverse Current	Ir	50 V	250		µA	75 °C
Forward Voltage	Vf	4 mA	1		V	25 °C
Reverse Recovery	Trr	See Note	300		n Sec	

Note: If = 2, Vr = -6, Recover to 50 k.

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N265

T-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

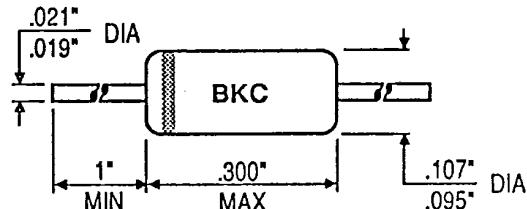
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	90 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	90		V	25 °C
Reverse Current	Ir	60 V		100	µA	25 °C
Forward Voltage	Vf	3.2 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N266**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

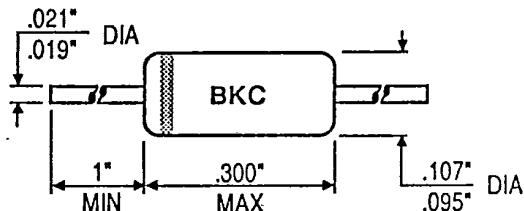
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	60 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	60		V	25 °C
Reverse Current	Ir	30 V		75	µA	25 °C
Forward Voltage	Vf	4 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N267

7-01-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

BKC International
Electronics Inc.**FEATURES**

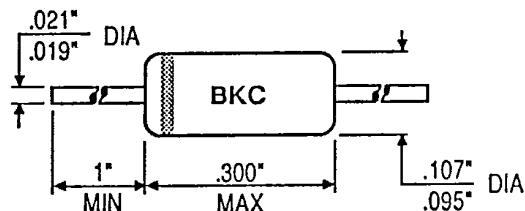
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	25 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	25		V	25 °C
Reverse Current	Ir	10 V		12	µA	25 °C
Forward Voltage	Vf	3.5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

Type No. 1N268**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377



**BKC International
Electronics Inc.**

FEATURES

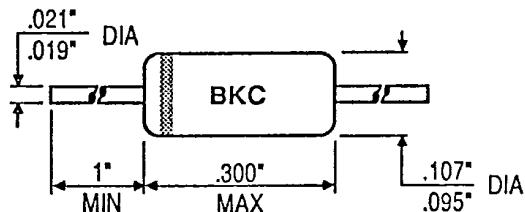
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	30 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	30		V	25 °C
Reverse Current	Ir	10 °V		20	µA	25 °C
Forward Voltage	Vf	2.5 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

BKC INTERNATIONAL ELECTRONICS, INC.
6 LAKE STREET, LAWRENCE, MA 01841
TEL NO. (508) 681-0392

ENGINEERING DATA SHEET

IN270JTXV

GOLD BONDED, GERMANIUM, DIODE

ABSOLUTE MAXIMUM RATINGS

PEAK REVERSE VOLTAGE (Vr)	100V(PK)
WORKING INVERSE VOLTAGE (VRM)	80V(PK)
RECURRENT PEAK FORWARD (60 CYCLES, 1/2 WAVE)	60mA
FORWARD CURRENT	325mA
SURGE CURRENT (1/120 SECOND)	1A
DERATE ABOVE + 25 DEGREES CELSIUS	0.923mA/DEGREES CELSIUS
OPERATING & STORAGE TEMPERATURE	-65 TO +100 DEGREES CELSIUS

CHARACTERISTICS

PARA COND	VF 10mA	VF 200mA	IR 20V	IR 80V	IR 100V	IR 10V
TA	25C	25C	25C	25C	25C	75C
LIMITS MAX.	.500V	1.0V	10uA	100uA	1mA	75uA

PACKAGE CONFIGURATION

GLASS CASE JEDEC DO-7 (INCHES)	
LEAD LENGTH	1.000 TO 1.500
LEAD DIAMETER	.018 TO .022
BODY LENGTH	.230 TO .300
BODY DIAMETER	.085 TO .130

MARKING

BLACK CATHODE BAND & BLACK DIGITAL PRINT

SPECIAL FEATURES: ALL DEVICES HAVE BEEN SUBJECTED TO & PASSED, AS APPLICABLE, ALL THE SCREENING TESTS AS SPECIFIED IN MIL-S-19500/200B & TABLE 11 OF MIL-S-19500.

Type No. 1N273**T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street
PO Box 1436
Lawrence, MA 01841
Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

**BKC International
Electronics Inc.****FEATURES**

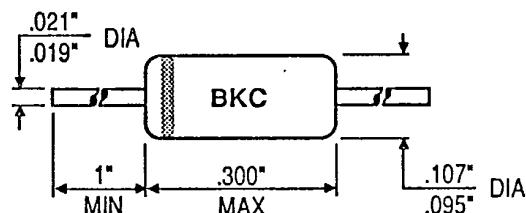
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	30 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	30		V	25 °C
Reverse Current	Ir	20 V		20	µA	25 °C
Forward Voltage	Vf	100 mA		1	V	25 °C

MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.

**FEATURES**

- Solder plate
- DO-7 package
- Very low noise level
- Non-ESD sensitive (>15 KV)

**Gold Bonded
Germanium
Diode**

1N276

SPECIAL FEATURES

- Thirty years of proven reliability
- Ideally suited for schottky diode replacement
- Low forward voltage drop – low power consumption

RELIABILITY DATA

- One million hours mean time between failures (MTBF)
- Passes all mechanical and environmental requirements of MIL-S-19500
- Solder plate surpasses requirements of MIL-STD 202, Method 208, 8 hour Steam Age Test

MAXIMUM RATINGS¹

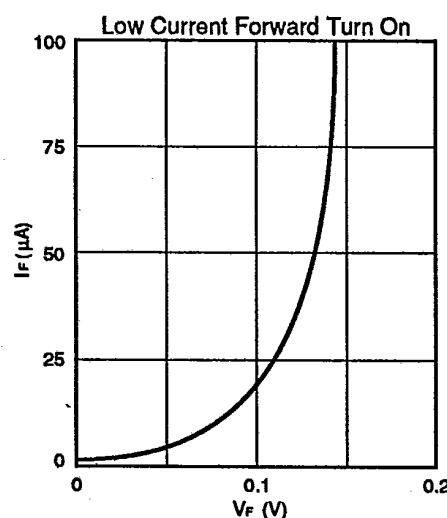
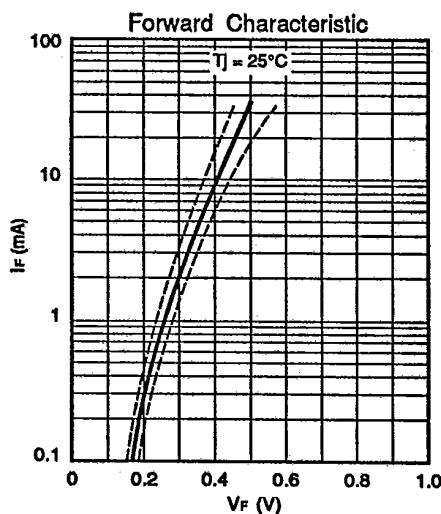
Peak Inverse Voltage (min)	60 V
Peak Forward Current	500 mA
Operating Temperature	-65° C to +85° C
Average Power Dissipation	80 mW

Note: 1. T_c @ 25°C, unless otherwise specified

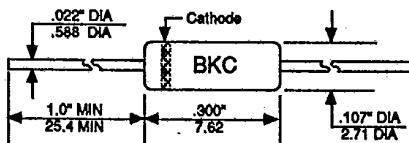
ELECTRICAL CHARACTERISTICS¹

Reverse Current [I _R @ 50 V]	100 µA (max)
Reverse Current [I _R @ 10 V, T _c @ 75°C]	100 µA (max)
Forward Voltage [V _F @ 40 mA]	1 V (max)
Reverse Recovery ²	300 nS (max)

Note: 2. I_F = 5 mA, V_R = - 40 V, Recover in <

Typical Electrical Performance**MECHANICAL**

JEDEC DO-7
Package
 $\frac{In}{mm}$ (MAX)



8004-9055



6 Lake Street
Lawrence, MA
USA 01841