


VDX1643 TR Limiter/ Attenuator

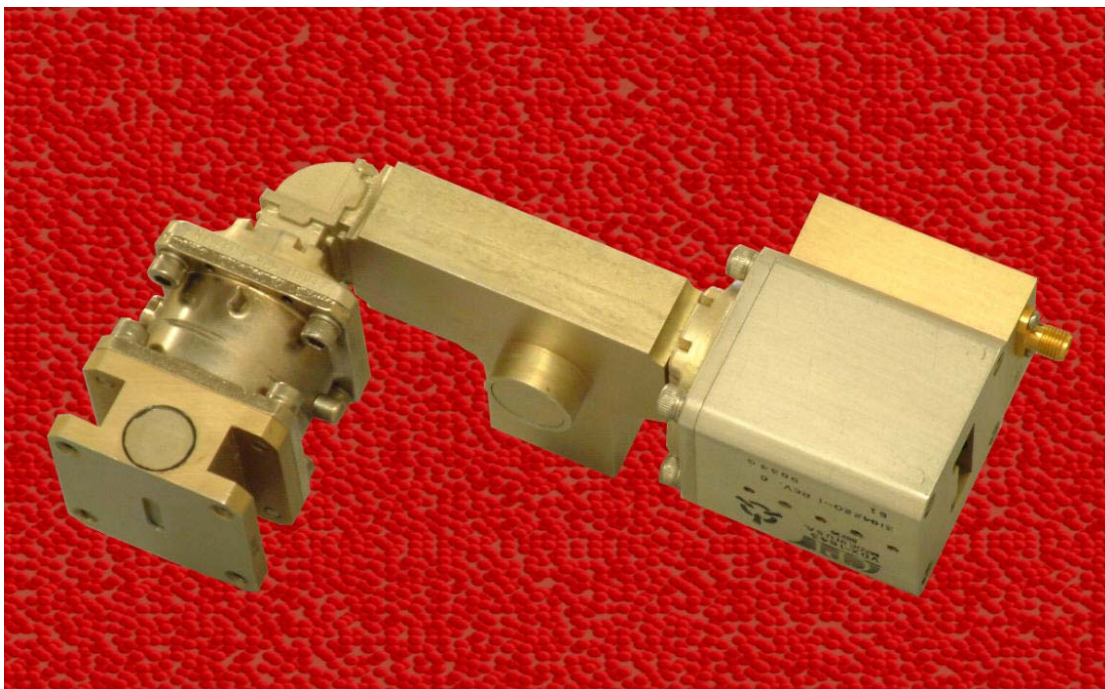

Features:

- Frequency: 9.4 - 10.1 GHz
- Peak Power: 6 kW
- Duty Cycle: 0.01
- Pulswidth: up to 40 uSec
- Insertion Loss: 1.25 dB max
- VSWR: 1.4:1 max
- Flat Leakage: 50 mW max
- Spike Leakage: 500 mW max
- Breakdown Pwr: 50 mW max
- Recovery Time (1 dB):
Pulswidth ≤ 10 uS: 5 μ S max
Pulswidth > 10 uS: 10 uS max
- 0 - 36 dB attenuator

Description:

Passive, X-Band Pre-TR, TR Limiter with non-reflective integral continuously variable attenuator.

150 Sohier Road
Beverly, Massachusetts 01915



Communications & Power Industries

Phone: 978-922-6000 Fax: 978-922-2736
E-Mail: marketing@bmd.cpii.com
Internet: www.cpii.com/bmd

Beverly Microwave Division