


FEMALE HEADERS

FEMALE HEADER STRAIGHT - 8.5mm FORMED LEG PROFILE

- Industry compatible
- Competitively priced
- Dual row
- No. of contacts 02-80
- Tin plated contacts
- 2.54mm pitch

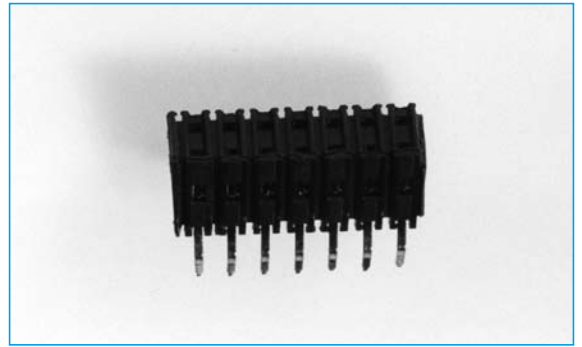

SECTION 8

SPECIFICATION


Material & Finish

Contact Material:	Phosphor Bronze
Insulator Material:	PBT & Glass-Fibre Reinforced UL-94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max
Insulator Resistance:	3000M Ω Min


Dielectric Withstanding

Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

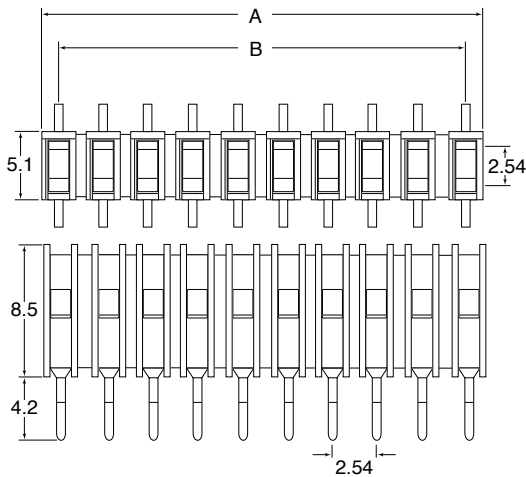

A = 2.54mm x N° of Contacts
 B = (2.54mm x N° of Contacts) -1



ORDERING INFORMATION

DBC	IDC	B9	D	04	B	T	1
Dubilier Connectors	IDC Connector	Series	N° of Rows D = Dual Row	N° of Contacts/per row 02=2way Thro to 43=43way	Contact Material B=Bronze	Contact Plating T=Tin	Colour 1=Black