

KR Electronics

General Description


KR 2692 is an elliptic type lowpass filter. The minimum 3 dB bandwidth is 91 MHz. Other passband frequencies are available. Also available in surface mount configuration. Please consult the factory.

Features


- Elliptic Type Lowpass
- >40 dB Stopband
- 50 Ω Source and Load
- SMA Connectors

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div and 10 nsec/div)

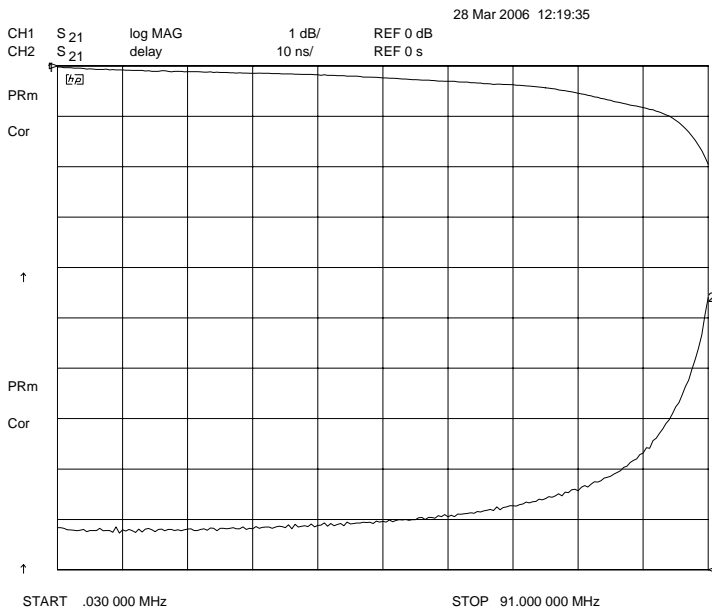

Overall Response
(10 dB/div)

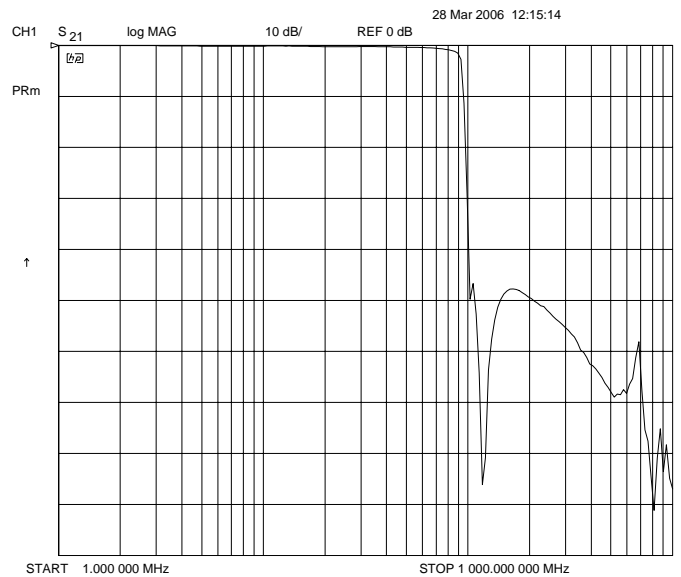

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2692 Lowpass

Specifications

Parameter	Specification	
Filter type	Lowpass	
End of Passband (< 3dB)	91 MHz	
Start of Stopband (> 20 dB)	100 MHz	Typically 35 dB to 40 dB at 100 MHz
Source & Load	50 Ω	

Physical Dimensions

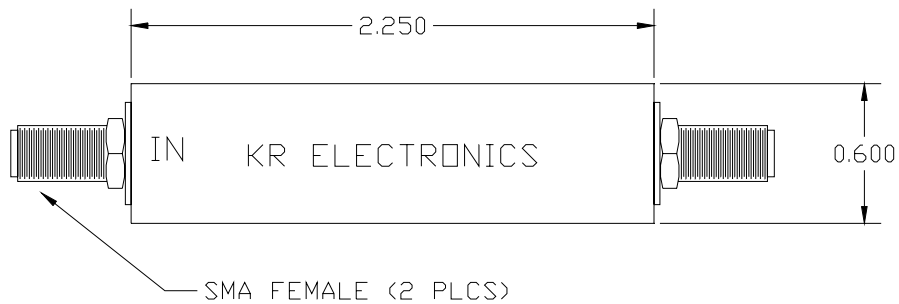

Dimensions shown in inches