



## Precision Automotive Thin Film Chip Resistors, AEC-Q200 Qualified, 2 kV ESD Rating

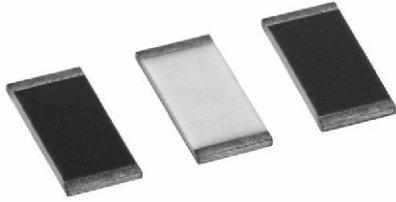

These chip resistors are available in wraparound terminations styles in 8 case sizes. They incorporate self passivated enhanced tantalum nitride resistor film to give superior performance on moisture resistance, electrostatic discharge, voltage coefficient, power handling and resistance stability. The terminations consist of an adhesion layer, a leach resistant nickel barrier, and solder coating (lead (Pb)-free). This product will out-perform all requirements of AEC-Q200.

### CONSTRUCTION

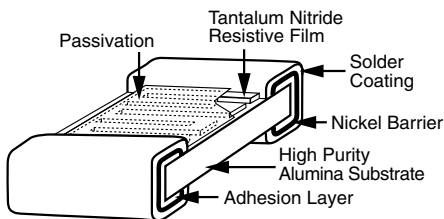

### FEATURES

- Resistance range: 10  $\Omega$  to 3 M $\Omega$
- AEC-Q200 qualified
- AEC-Q200 ESD rated class 1C (2 kV)
- Laser trimmed to any value
- Moisture resistant to MIL-STD-202, method 202
- Tantalum nitride resistor film on high purity alumina substrate
- 100 % visual inspected per MIL-PRF-55342
- Laser-trimmed tolerances to  $\pm 0.1$  %
- Load life stability < 0.05 % at 1000 h at 70 °C
- Very low noise and voltage coefficient (< - 30 dB, < 0.1 ppm/V)
- Compliant to RoHS directive 2002/95/EC


**RoHS**  
COMPLIANT

**GREEN**  
(5-2008)\*\*

### TYPICAL PERFORMANCE

|      | ABSOLUTE |
|------|----------|
| TCR  | 25       |
| TOL. | 0.1      |

### STANDARD ELECTRICAL SPECIFICATIONS

| TEST                           | SPECIFICATIONS  | CONDITIONS                              |
|--------------------------------|---|---|
| Material                       | Tantalum nitride  | -                                       |
| Resistance Range               | 10 $\Omega$ to 3 M $\Omega$                               | -                                       |
| TCR: Absolute                  | $\pm 25$ ppm/ $^{\circ}$ C to $\pm 100$ ppm/ $^{\circ}$ C | - 55 $^{\circ}$ C to + 125 $^{\circ}$ C |
| Tolerance: Absolute            | $\pm 0.1$ % to $\pm 1.0$ %                                | + 25 $^{\circ}$ C                       |
| Stability: Absolute            | $\pm 0.05$ %  | 2000 h at 70 $^{\circ}$ C rated power   |
| Stability: Ratio               | Not applicable  | -                                       |
| Voltage Coefficient            | Less than 0.1 ppm/V                                       | -                                       |
| Working Voltage                | 75 V to 200 V   | -                                       |
| Operating Temperature Range    | - 55 $^{\circ}$ C to + 150 $^{\circ}$ C                   | -                                       |
| Storage Temperature Range      | - 55 $^{\circ}$ C to + 150 $^{\circ}$ C                   | -                                       |
| Noise                          | < - 30 dB   | -                                       |
| Shelf Life Stability: Absolute | 100 ppm   | 1 year at 25 $^{\circ}$ C               |

### COMPONENT RATINGS

| CASE SIZE | POWER RATING (mW) | WORKING VOLTAGE (V) | RESISTANCE RANGE ( $\Omega$ ) |
|-----------|-------------------|---------------------|-------------------------------|
| 0402      | 50                | 75                  | 20 to 35K                     |
| 0603      | 150               | 75                  | 10 to 80K                     |
| 0805      | 200               | 100                 | 10 to 301K                    |
| 1206      | 400               | 200                 | 10 to 1M                      |
| 1505      | 400               | 150                 | 10 to 1M                      |
| 2208      | 750               | 150                 | 10 to 1.75M                   |
| 2010      | 800               | 200                 | 10 to 2M                      |
| 2512      | 1000              | 200                 | 10 to 3M                      |

\*\* Please see document "Vishay Material Category Policy": [www.vishay.com/doc?99902](http://www.vishay.com/doc?99902)

| DIMENSIONS in inches |               |               |               |                        |                        |
|----------------------|---------------|---------------|---------------|------------------------|------------------------|
|                      |               |               |               |                        |                        |
| CASE SIZE            | L             | W             | T             | D                      | E                      |
| 0402                 | 0.042 ± 0.008 | 0.022 ± 0.005 | 0.015 ± 0.003 | 0.010 ± 0.005          | 0.010 ± 0.005          |
| 0603                 | 0.064 ± 0.006 | 0.032 ± 0.005 | 0.015 ± 0.003 | 0.012 ± 0.005          | 0.015 ± 0.005          |
| 0805                 | 0.080 ± 0.006 | 0.050 ± 0.005 | 0.015 ± 0.003 | 0.015 ± 0.005          | 0.015 ± 0.005          |
| 1206                 | 0.126 ± 0.008 | 0.063 ± 0.005 | 0.015 ± 0.003 | 0.020 + 0.005, - 0.010 | 0.020 + 0.005, - 0.010 |
| 1505                 | 0.155 ± 0.007 | 0.050 ± 0.005 | 0.015 ± 0.003 | 0.015 ± 0.005          | 0.015 ± 0.005          |
| 2010                 | 0.209 ± 0.009 | 0.098 ± 0.005 | 0.015 ± 0.003 | 0.020 ± 0.005          | 0.020 ± 0.005          |
| 2208                 | 0.230 ± 0.007 | 0.075 ± 0.005 | 0.015 ± 0.003 | 0.020 ± 0.005          | 0.020 ± 0.005          |
| 2512                 | 0.259 ± 0.009 | 0.124 ± 0.005 | 0.015 ± 0.003 | 0.020 ± 0.005          | 0.020 ± 0.005          |

| ENVIRONMENTAL TESTS (Vishay Performance vs. AEC-Q200 Requirements) |  |                            |                            |            |
|--|--|----------------------------|----------------------------|------------|
| ENVIRONMENTAL TEST   | CONDITIONS   | LIMITS PER AEC-Q200        | TYPICAL VISHAY PERFORMANCE |            |
| Resistance Temperature Characteristic                              | - 55 °C to + 125 °C                                | ± 50 ppm/°C                | ± 35 ppm/°C                |            |
| Max. Ambient Temp. at Rated Wattage                                |  | + 70 °C                    | + 70 °C                    |            |
| Max. Ambient Temp. at Power Derating                               |  | + 150 °C                   | + 150 °C                   |            |
| High Temperature Storage $\Delta R$                                | MIL-STD-202, 108, 1000 h at 125 °C                 | ± 0.1 %                    | + 0.016 %                  |            |
| Temperature Cycling $\Delta R$                                     | JESD22, JA-104, 1000 cycles, - 55 °C to + 125 °C   | ± 0.15 %                   | + 0.013 %                  |            |
| Moisture Resistance $\Delta R$                                     | MIL-STD-202, 106                                   | ± 0.20 %                   | + 0.0010 %                 |            |
| Biased Humidity $\Delta R$   | MIL-STD-202, 103, 1000 h at 85 °C, 85 % RH, 10 % P | ± 0.10 %                   | + 0.0297 %                 |            |
| Life $\Delta R$  | MIL-STD-202, 108 at 125 °C, 1000 h                 | ± 0.1 %                    | + 0.0220 %                 |            |
| Mechanical Shock $\Delta R$  | MIL-STD-202, method 213, condition C               | ± 0.1 %                    | + 0.0130 %                 |            |
| Vibration $\Delta R$   | MIL-STD-202 method 204, 10 Hz to 2 kHz             | ± 0.1 %                    | + 0.0030 %                 |            |
| Resistance to Soldering Heat $\Delta R$                            | MIL-STD-202, 204, condition B                      | ± 0.10 %                   | + 0.0150 %                 |            |
| Electrostatic Discharge $\Delta R$                                 | AEC-Q200-002 at 2 kV, human body                   | ± 0.10 %                   | - 0.032 %                  |            |
| Solderability  | Visual   | J-STD-002, method B and B1 | 95 %                       | Acceptable |
| Terminal Strength $\Delta R$                                       | AEC-Q200-006 at 1 kg for 60 s                      | ± 0.10 %                   | + 0.012 %                  |            |
| Flame Retardance   | Visual   | AEC-Q200-001 para 4.0      | Acceptable                 |            |

| GLOBAL PART NUMBER INFORMATION             |  |  |   |   |   |   |   |   |  |   |   |   |   |   |   |
|--|--|--|---|---|---|---|---|---|--|---|---|---|---|---|---|
| New Global Part Numbering: PAT1206E1002BS1 |  |  |   |   |   |   |   |   |  |   |   |   |   |   |   |
| P  | A  | T  | 1   | 2 | 0 | 6 | E   | 1   | 0  | 0 | 2 | B | S | T | 1 |
| GLOBAL MODEL                               | CASE SIZE  | TCR CHARACTERISTIC                                     | RESISTANCE  |   |   |   | TOLERANCE   | TERMINATION   | PACKAGING  |   |   |   |   |   |   |
| PAT  | 0402<br>0603<br>0805<br>1206<br>1505<br>2010<br>2208<br>2512 | E = ± 25 ppm/°C<br>H = ± 50 ppm/°C<br>K = ± 100 ppm/°C | The first 3 digits are significant figures and the last digit specifies the number of zeros to follow. "R" designates the decimal point.<br><br>Example:<br>10R0 = 10 Ω<br>1000 = 100 Ω<br>1002 = 10 kΩ |   |   |   | B = ± 0.1 %<br>D = ± 0.5 %<br>F = ± 1.0 %<br>G = ± 2.0 %<br>J = ± 5.0 % | S = Wraparound lead (Pb)-free solder w/nickel barrier | TAPE AND REEL<br>T1 = 1000 min., 1000 mult <sup>(1)</sup><br>TF = Full reel<br>TS = 100 min., 1 mult |   |   |   |   |   |   |

**Note**  
(1) Preferred packaging code



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.