

Silicon PNP Power Transistors

2N6132 2N6133 2N6134

DESCRIPTION

- With TO-220 package
- High power dissipation
- Complement to NPN type :
2N6129 2N6130 2N6131

APPLICATIONS

- Power amplifier and medium speed switching applications

PINNING

PIN	DESCRIPTION
1	Emitter
2	Collector;connected to mounting base
3	Base

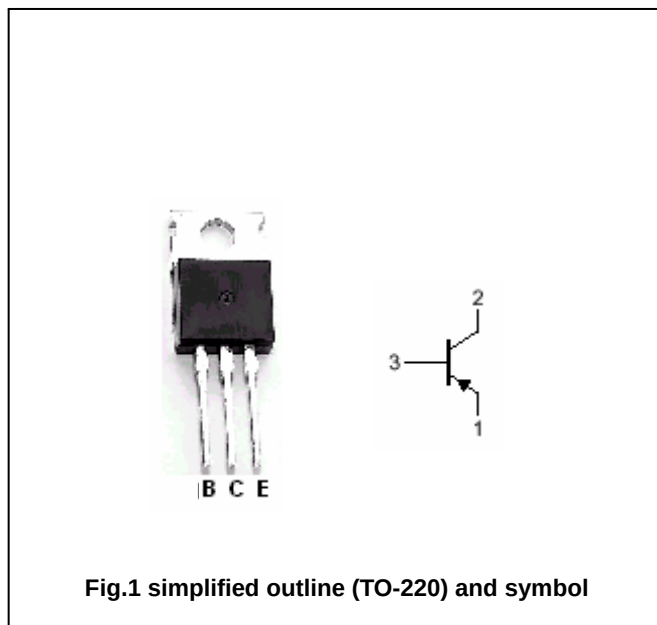


Fig.1 simplified outline (TO-220) and symbol

Absolute maximum ratings($T_a=25^{\circ}\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	2N6132	-40	V
		2N6133	-60	
		2N6134	-80	
V_{CEO}	Collector-emitter voltage	2N6132	-40	V
		2N6133	-60	
		2N6134	-80	
V_{EBO}	Emitter-base voltage	Open collector	-5	V
I_C	Collector current		-7	A
I_B	Base current		-3	A
P_T	Total power dissipation	$T_C=25^{\circ}\text{C}$	50	W
T_j	Junction temperature		150	$^{\circ}\text{C}$
T_{stg}	Storage temperature		-65~150	$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal resistance from junction to case	2.5	$^{\circ}\text{C/W}$

Silicon PNP Power Transistors

2N6132 2N6133 2N6134

CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEQ(SUS)}	Collector-emitter sustaining voltage	2N6132	I _C =-0.1A ; I _B =0	-40			V
		2N6133		-60			
		2N6134		-80			
V _{CEsat}	Collector-emitter saturation voltage	2N6132	I _C =-7A; I _B =-1.2A			-1.4	V
		2N6133					
		2N6134					
V _{BE}	Base-emitter on voltage		I _C =-2.5A ; V _{CE} =-4V			-1.4	V
I _{CEV}	Collector cut-off current	2N6132	V _{CE} =-40V; V _{BE} =1.5V T _C =150°C			-0.5 -3.0	mA
		2N6133	V _{CE} =-60V; V _{BE} =1.5V T _C =150°C			-0.5 -3.0	
		2N6134	V _{CE} =-80V; V _{BE} =1.5V T _C =150°C				-0.5 -3.0
I _{EBO}	Emitter cut-off current		V _{EB} =-5V; I _C =0			-1.0	mA
h _{FE}	DC current gain		I _C =-2.5A ; V _{CE} =-4V	20		100	
f _T	Transition frequency		I _C =-0.2A ; V _{CE} =-4V	2.5			MHz

Silicon PNP Power Transistors

2N6132 2N6133 2N6134

PACKAGE OUTLINE

