

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0192030100**  
**Status:** **Active**  
**Description:** VersaKrimp™ Temp-Term Ring Tongue Terminal for 10 to 12 AWG Wire, Stud Size 10, Mylar Tape Carrier

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

UL E32244

**General**

Product Family Ring and Spade Terminals  
 Series [19203](#)  
 Comments 650&deg;F (343&deg;C)  
 Crimp Quality Equipment Yes  
 Mil-Spec N/A  
 Product Name Temp-Terms, VersaKrimp™  
 Type Ring

**Physical**

Barrel Type Closed - Brazed  
 Insulation None  
 Material - Plating Mating Tin  
 Packaging Type Adhesive Tape on Reel  
 Stud Size 10 (M5)  
 Wire Size AWG 10, 12  
 Wire Size mm² 4.00 - 6.00

**Material Info**

Old Part Number C-T-328-10T

**Reference - Drawing Numbers**

Sales Drawing CTCD30101



*Series  
image - Reference only*

**EU RoHS**

**ELV and RoHS  
Compliant**

**REACH SVHC  
Contains SVHC: No  
Halogen-Free  
Status**

**Not Reviewed**

**China RoHS**



**Need more information on product  
environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[19203Series](#)

**Application Tooling | [FAQ](#)**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
ATP Perishable Tool Kit, Used in ATP Presses that Process Product on Tape	<a href="#">0190270088</a>
Mini-Mac™ Applicator	<a href="#">0638851000</a>

**NOTES:**

① MAT'L: COPPER (STOCK TKN  $\frac{.040}{.102}$ )


PLATING: WATTS BATH NICKLE (.0002 MIN)

② BRAZED SEAM

③ 650°F MAX. OPERATING TEMP.

STUD SIZES: ( $\pm .005$ )

- 02 = .094 209 = .209
- 04 = .119 413 = .413
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

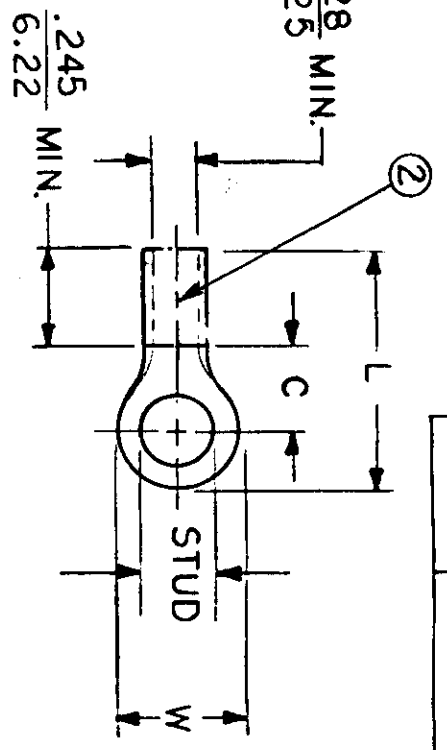

ALL DIMENSIONS =  $\frac{\text{INCHES}}{\text{MM}}$

WIRE SIZE: 12-10 AWG  
4.0-6.0 MM<sup>2</sup>

PART NUMBER	"W" INCHES	"C" MIN.	"L" MAX.	AVAILABLE STUD SIZES
C-T-301-	$\frac{.750}{19.05}$	$\frac{.611}{15.52}$	$\frac{1.280}{32.51}$	14, 56, 38, 76, 12
C-T-328-	$\frac{.375}{9.53}$	$\frac{.303}{7.70}$	$\frac{.785}{19.94}$	04, 06, 08, 10, 209
C-T-330-	$\frac{.530}{13.46}$	$\frac{.393}{9.98}$	$\frac{.952}{24.18}$	10, 14, 56, 38
C-T-336-	$\frac{.282}{7.16}$	$\frac{.306}{7.77}$	$\frac{.741}{18.82}$	04, 06, 08
C-T-340-	$\frac{.592}{15.04}$	$\frac{.468}{11.89}$	$\frac{1.056}{26.82}$	10, 14, 56, 38, 209, 413

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		REFERENCE	SCALE:	NTS	DATE	TITLE:
FRAC.	DEC.	ANG.	DRWN. BY:	JJ	11-28-84	RING TONGUE TEMP-TERM.
±	±	±	CHKD. BY:	GZ	11-30-84	650°F MAX.
			APPRD. BY:			VERSAKRIMP

DWG. NO.	A	CUSTOMER DWG.
----------	---	---------------

