



1	Material: 0.0625" ± 0.007" Fr4/G10
2	Pins: shell material- Brass; finish- 10µ" Gold over 50µ" Nickel (min.).
3	Test Points: 0.25" sq. post. Gold flash on contact area, 150µ" Tin on tail.

Top View

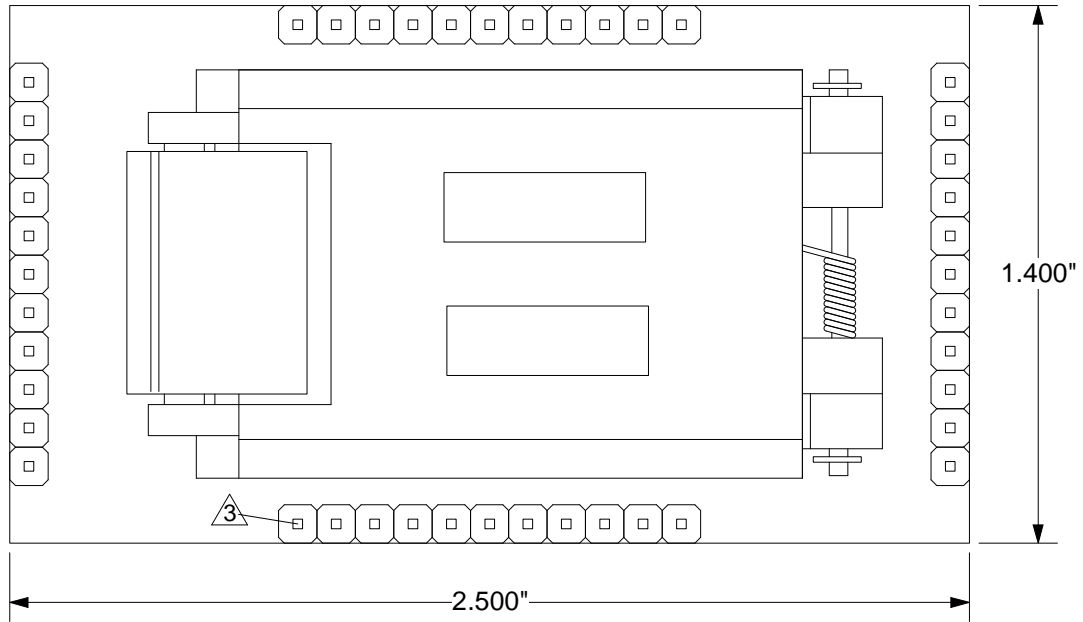


Side View

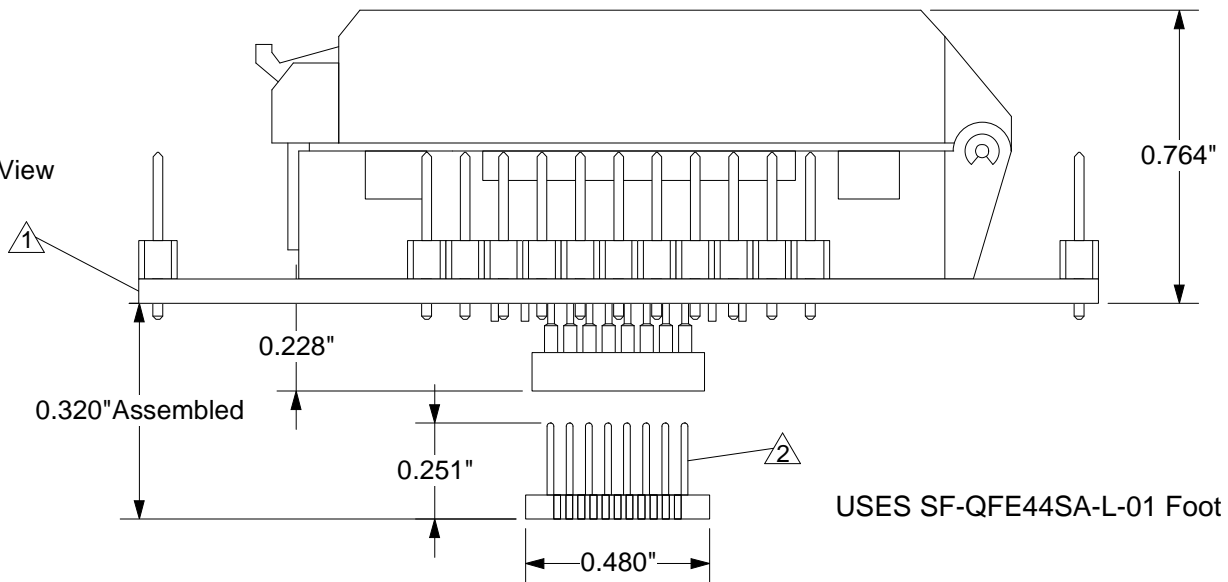

**Description: Carrier Adaptor**

44 position (0.8mm pitch) QFP Zero Insertion Force socket with test points to 44 position surface mountable QFP emulator foot. The foot is designed to replace a 44 pin 0.8mm pitch device. The 2 piece adaptor interconnects via a gold plated (0.05" center) Mini-grid socket interface.

All tolerances are ±0.005" unless otherwise specified. Materials and specifications are subject to change without notice.

 <p>© 1995 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com</p>	<p>CA-QFE44SA-L-Z-T-01 DRAWING</p>	<p>Status: Released</p>	<p>Scale: 2:1</p>	<p>Rev: C</p>
	<p>Drawing: C. Hautman</p>	<p>Date: 01/16/95</p>		
	<p>File: CA-QFE044SA-L-Z-T-01 Dwg</p>	<p>ECO#</p>		