


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters,
free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2002/95/EC and
WEEE 2002/96/EC

MECHANICAL DATA

- Case: JEDEC DO-41 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.012ounce, 0.33 gram

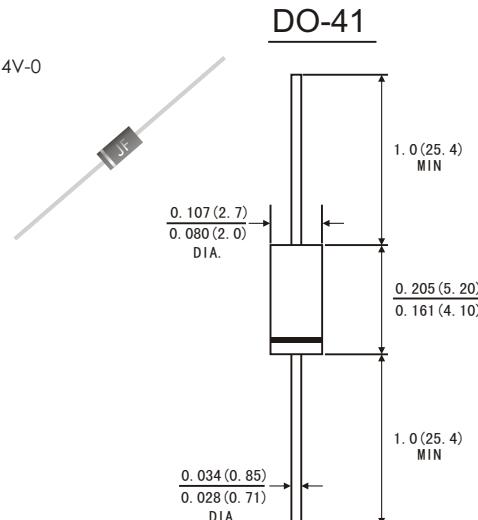

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

	Symbols	SR 120	SR 130	SR 140	SR 150	SR 160	SR 180	SR 1A0	SR 1150	SR 1200	Units							
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	Volts							
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	57	71	105	140	Volts							
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	150	200	Volts							
Maximum average forward rectified current 0.375"(9.5mm) lead length(see Fig. 1.)	I _(AV)	1.0								Amp								
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	40.0								Amps								
Maximum instantaneous forward voltage at 1.0 A(Note 1)	V _F	0.55		0.70		0.85		0.90		0.95								
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	T _A =25°C T _A =100°C	I _R	0.5								mA							
			10															
Typical junction capacitance(Note 3)	C _J	110								pF								
Typical thermal resistance(Note 2)	R _{θJA} R _{θJL}	50.0 15.0								°C/W								
Operating junction temperature range	T _J	-65 to+125			-65 to+150			°C										
Storage temperature range	T _{STG}	-65 to+150								°C								

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle

2.Thermal resistance (from junction to ambient)Vertical P.C.B. mounted , with 1.5 X1.5"(38X38mm)copper pads

3.Measured at 1.0MHz and reverse voltage of 4.0 volts

RATINGS AND CHARACTERISTIC CURVES SR120 THRU SR1200

FIG.1-FORWARD CURRENT DERATING CURVE

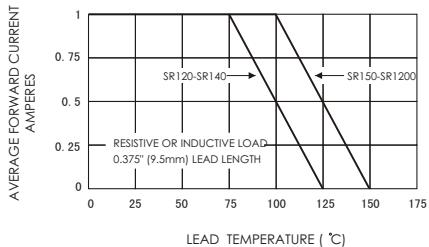


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

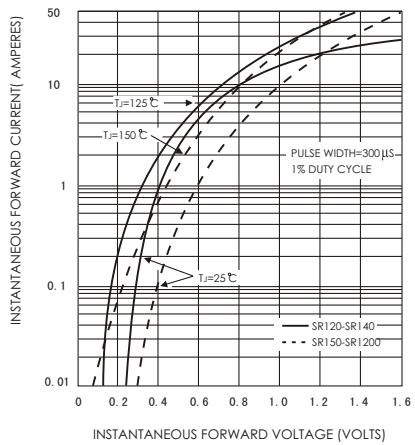


FIG.5-TYPICAL JUNCTION CAPACITANCE

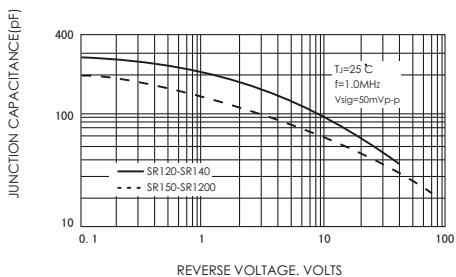


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

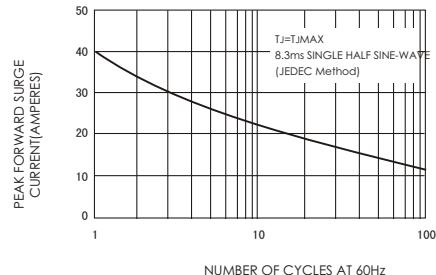


FIG.4-TYPICAL REVERSE CHARACTERISTICS

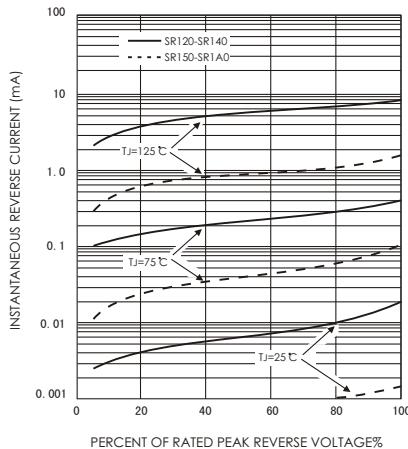


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

