


### Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	199.5	200	200.5
Insertion Loss	dB	-	25	30
1 dB Bandwidth	MHz	75.9	77.23	-
3 dB Bandwidth	MHz	-	78.85	-
40 dB Bandwidth	MHz	-	85.1	-
45 dB Bandwidth	MHz	-	85.48	86
50 dB Bandwidth	MHz	-	85.86	106
Passband Variation	dB	-	0.5	-
Absolute Delay	usec	-	0.97	2
Ultimate Rejection( $f_0 \pm 53\text{MHz}$ )	dB	50	-	-
Material Temperature coefficient	KHz/°C	-16.4		
Ambient Temperature	°C	25		
Package Size	DIP2212 (22.2x12.8x4.7mm3)			

#### Notes:

1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

### Matching Configuration

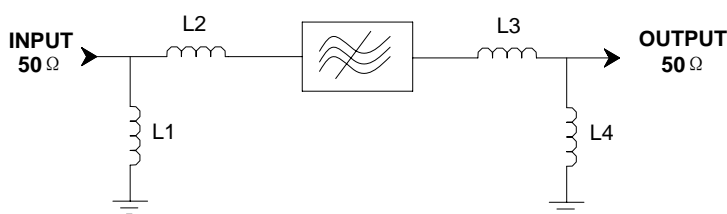

**L1 = 39nH    L2 = 22nH**  
**L3 = 27nH    L4 = 150nH**  
**Source/Load Impedance = 50 ohm**


Notes - Component values may change depending on board layout.



**SIPAT Co., Ltd.**  
( CETC No. 26 Research Institute )  
Nanning Huayuan Road No. 14  
Chongqing, China, 400060

Part Number	LBN20001	
Rev. Date	2006-12-21	
Rev.	1.0	Page 1/3

*Package Dimension*

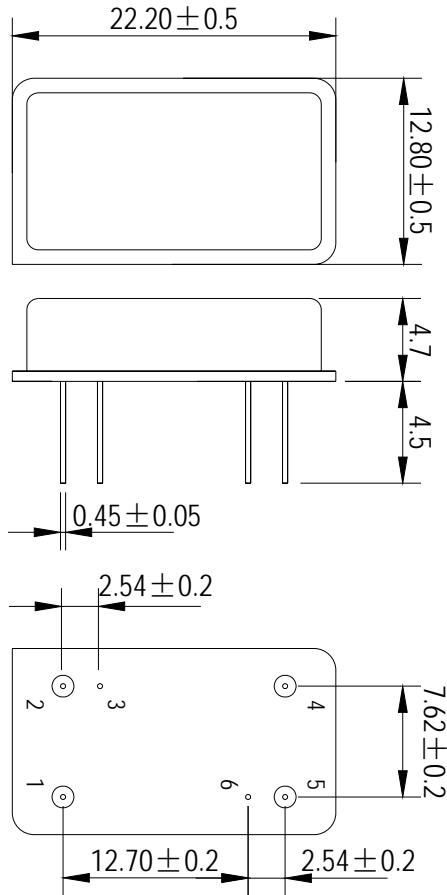

Input	1
Output	4
Ground	2,3,5,6

**Package: DIP2212**

**Unit: mm**




**SIPAT Co., Ltd.**  
( CETC No. 26 Research Institute )  
Nanping Huayuan Road No. 14  
Chongqing, China, 400060


Part Number	LBN20001	
Rev. Date	2006-12-21	
Rev.	1.0	Page 2/3

Typical Performance


Frequency Respond

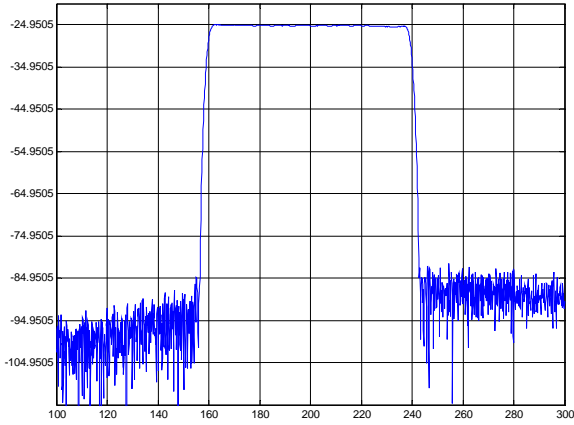


Passband Respond

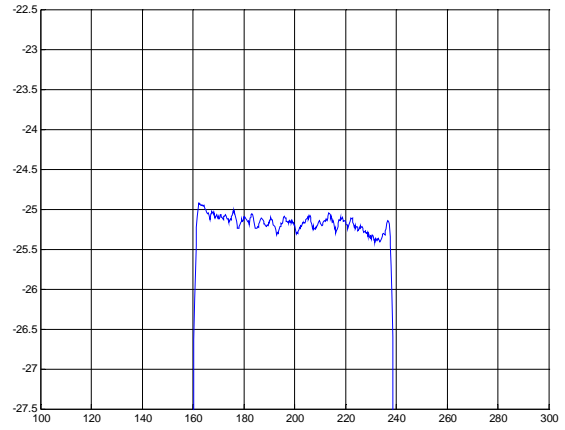


Group Delay Variation(f0±37MHz)

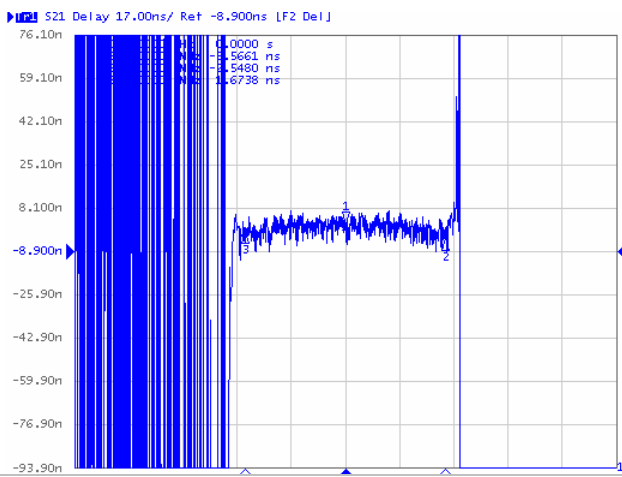


Phase Linearity(f0±37MHz)

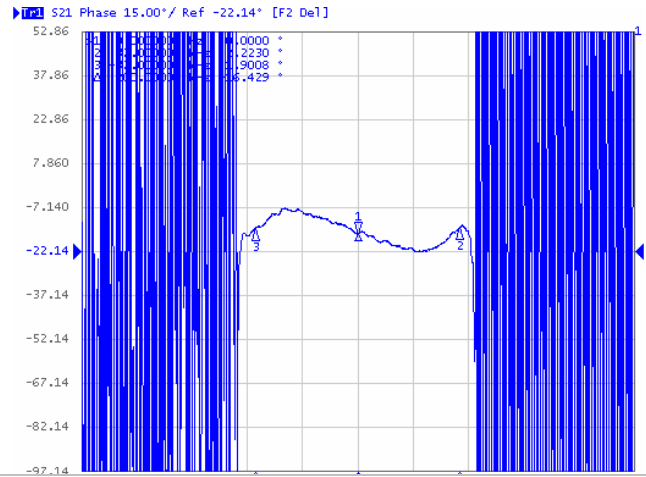

Smith Chart S11

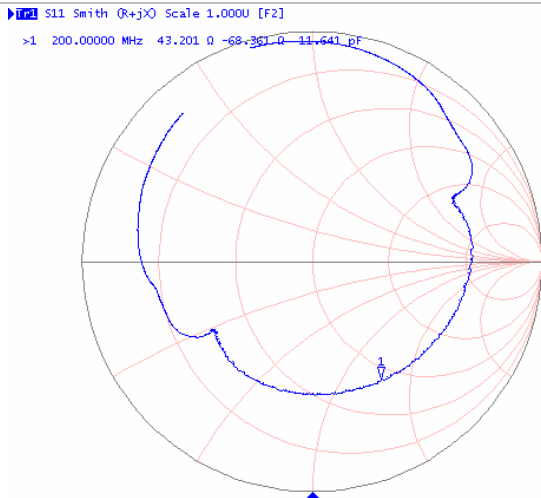

Smith Chart S22

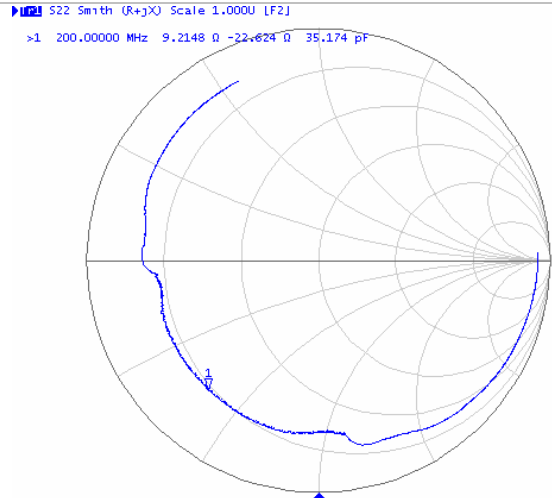

**SIPAT Co., Ltd.**  
( CETC No. 26 Research Institute )  
Nanping Huayuan Road No. 14  
Chongqing, China, 400060

Part Number	LBN20001	
Rev. Date	2006-12-21	
Rev.	1.0	Page 3/3