


**1mm APERTURE OPTO-ELECTRONIC SINGLE CHANNEL SLOTTED INTERRUPTER SWITCHES WITH DARLINGTON SENSORS**

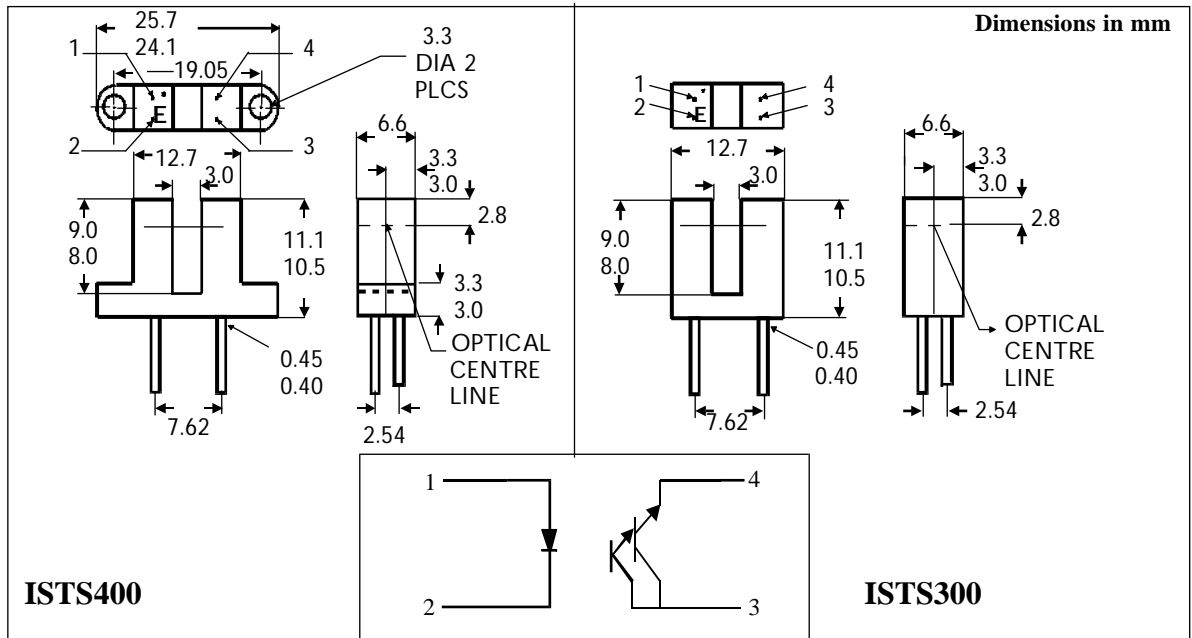

**ISTS400**

**ISTS300**

**DESCRIPTION**

The ISTS300, ISTS400 opaque photointerrupters are single channel switches consisting of a Gallium Arsenide infrared emitting diode and a NPN silicon photo darlington mounted in a polycarbonate housing. The package is designed to optimise the mechanical resolution, coupling efficiency, ambient light rejection, cost and reliability. Operating on the principle that objects opaque to infrared will interrupt the transmission of light between an infrared emitting diode and a photo sensor switching the output from an "ON" state to an "OFF" state.

**FEATURES**

- High Gain
- 3mm Gap between LED and Detector
- Polycarbonate case protected against ambient light

**APPLICATIONS**

- Copiers, Printers, Facsimilies, Record Players, Cassette Decks, Optoelectronic Switches

**ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)**

Storage Temperature	-40°C to + 85°C
Operating Temperature	-25°C to + 85°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

**INPUT DIODE**

Forward Current	50mA
Reverse Voltage	5V
Power Dissipation	75mW

**OUTPUT TRANSISTOR**

Collector-emitter Voltage $BV_{CEO}$	30V
Emitter-collector Voltage $BV_{ECO}$	6V
Collector Current $I_C$	50mA
Power Dissipation	75mW

**ISOCOM COMPONENTS LTD**

Unit 25B, Park View Road West,  
Park View Industrial Estate, Brenda Road  
Hartlepool, Cleveland, TS25 1YD  
Tel: (01429) 863609 Fax : (01429) 863581

**ISOCOM INC**


720 E., Park Boulevard, Suite 104,  
Plano, TX 75074 USA  
Tel: (972) 423-5521  
Fax: (972) 422-4549

**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**


PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION		
Input	Forward Voltage ( $V_F$ )	5	1.2	1.7	V	$I_F = 50\text{mA}$ $I_R = 1\mu\text{A}$ $V_R = 6\text{V}$		
	Reverse Voltage ( $V_R$ )				V			
	Reverse Current ( $I_R$ )				$\mu\text{A}$			
Output	Collector-emitter Breakdown ( $BV_{CEO}$ ) ( Note 1 )	30			V	$I_C = 1\text{mA}$		
	Emitter-collector Breakdown ( $BV_{ECO}$ )	6			V	$I_E = 100\mu\text{A}$		
	Collector-emitter Dark Current ( $I_{CEO}$ )			100	nA	$V_{CE} = 25\text{V}$		
Coupled	On-State Collector Current $I_{C(ON)}$ ( Note 1 )	7.5			mA	$10\text{mA } I_F, 1.5\text{V } V_{CE}$		
	Collector-emitter Saturation Voltage $V_{CE(SAT)}$					1.0	V	$10\text{mA } I_F, 1.8\text{mA } I_C$
	Turn-on Time $t_{on}$ Turn-off Time $t_{off}$					45 250	$\mu\text{s}$ $\mu\text{s}$	$V_{CC} = 5\text{V}, I_F = 10\text{mA},$ $R_L = 750\Omega$

Note 1      Special Selections are available on request. Please consult the factory.


**Collector Power Dissipation vs. Ambient Temperature**

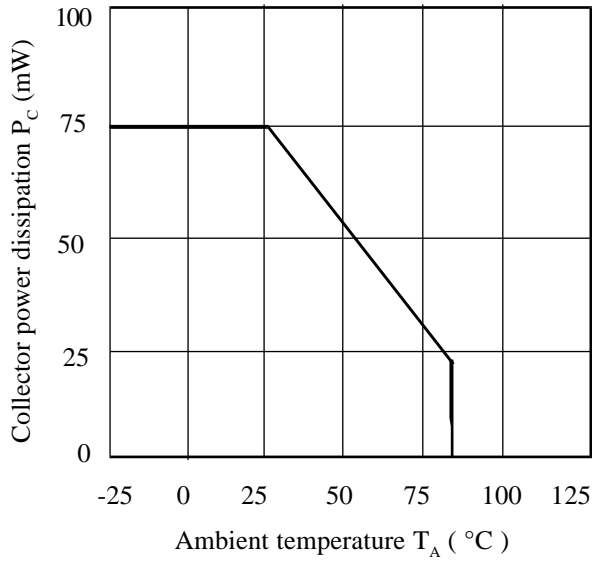


**Normalized Output Current vs. Collector-emitter Voltage**

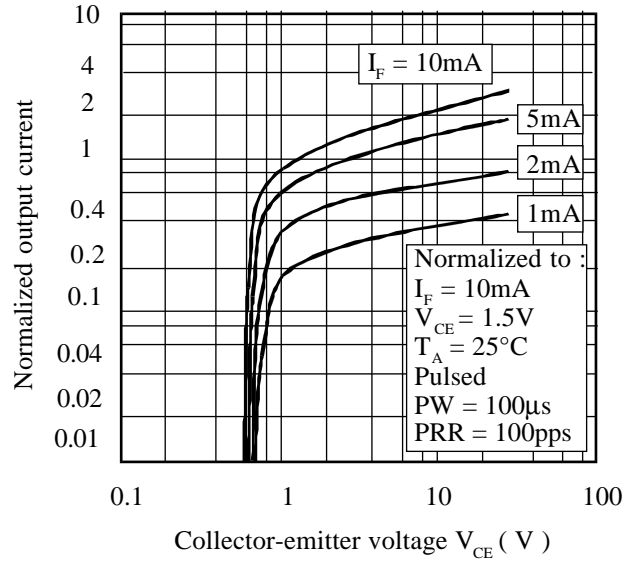


**Forward Current vs. Ambient Temperature**

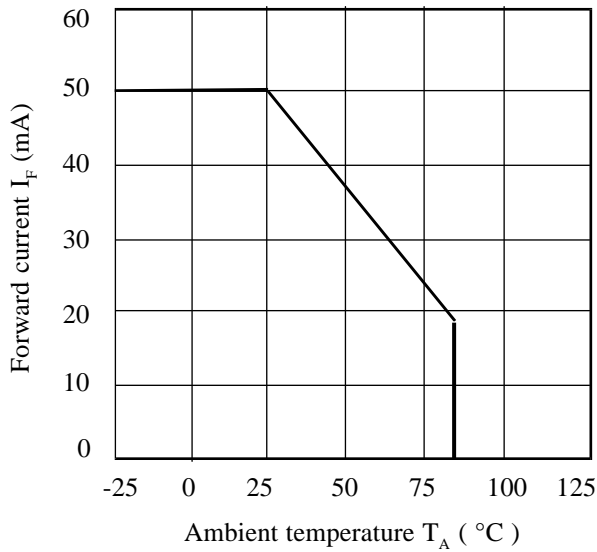

**Normalized Output Current vs. Forward Current**

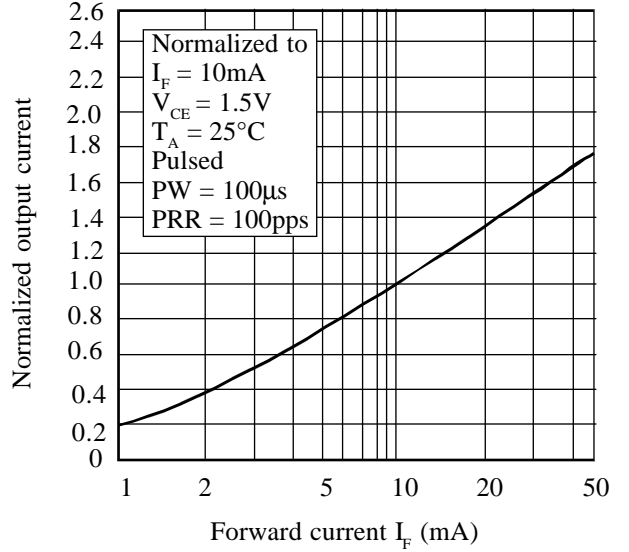

**Normalized Output Current vs. Ambient Temperature**

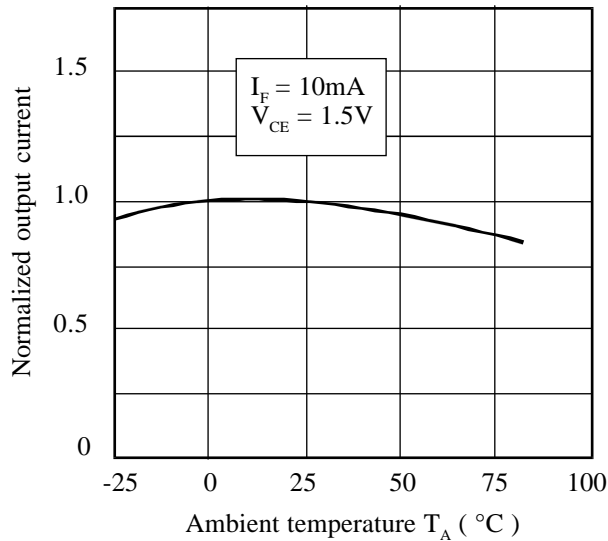

**Collector-emitter Saturation Voltage vs. Ambient Temperature**

