



CHENMKO ENTERPRISE CO.,LTD

Lead free devices

SURFACE MOUNT
SCHOTTKY BARRIER DIODE
VOLTAGE 40 Volts CURRENT 1 Ampere

CH651L-40PT

APPLICATION

- * For low-loss, fast-recovery, meter protection, bias isolation and clamping applications

FEATURE

- * Small surface mounting type. (SC-76/SOD-323)
- * Low VF. (VF=0.52V Max.)
- * Medium current Schottky rectifier diode


CONSTRUCTION

- * Silicon epitaxial planar



MARKING

- * JX

CIRCUIT



SC-76/SOD-323

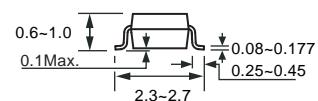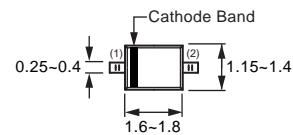

Dimensions in millimeters

SC-76/SOD-323

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	CH651L-40PT	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	40	Volts
Maximum RMS Voltage	V _{RMS}	28	Volts
Maximum DC Blocking Voltage	V _{DC}	40	Volts
Maximum Average Forward Rectified Current	I _o	1.0	Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	20	Amps
Typical Junction Capacitance (Note 2)	C _J	110	pF
Typical Thermal Resistance (Note 1)	R _{θJL}	25	°C / W
Operating and Storage Temperature Range	T _{J,TSTG}	-65 to +150	°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS		CH651L-40PT	UNITS
Maximum Instantaneous Forward Voltage at I _F = 0.7A	V _F	0.52	Volts
Maximum Average Reverse Current at V _R = 40V	@ TA = 25°C	0.2	mAmps
	@ TA = 100°C	30	mAmps

NOTES : 1. Thermal Resistance (Junction to Lead) : PC Board Mounted on 0.2 X 0.2" (5 X 5mm) copper pad area.


2. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts.

2004-10

RATING CHARACTERISTIC CURVES (CH651L-40PT)


Forward current $I_F = f(T_S)$

T_A = Parameter

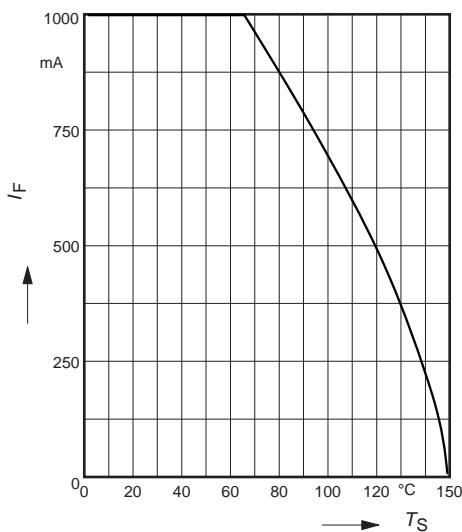

Reverse current $I_R = f(V_R)$

T_A = Parameter

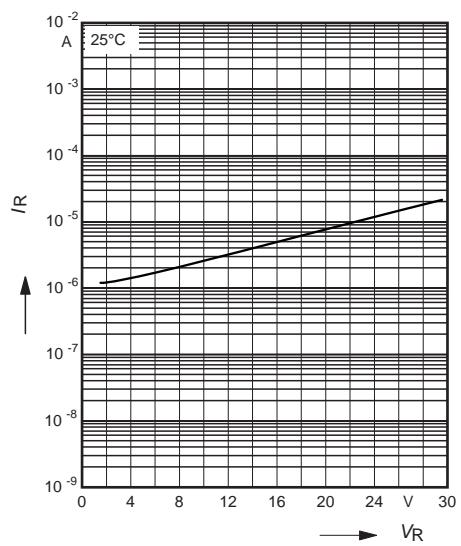

Forward current $I_F = f(V_F)$

T_A = parameter

