


# CLE310F

## Super-efficient AlGaAs IRED Flat Lead PLCC Package



June, 2003

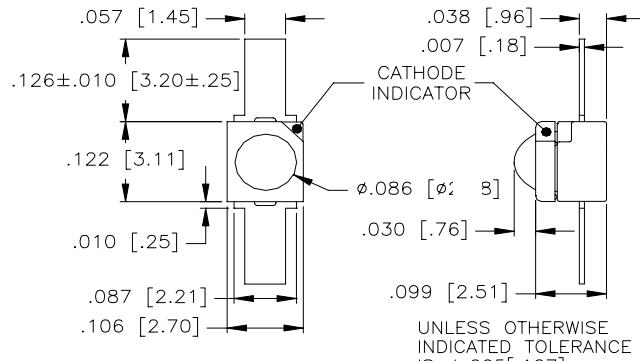

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)

### features

- Flat lead PLCC package
- ± 5° emission angle
- 850nm peak wavelength
- Exceptionally high power output
- Custom plastic lens
- RoHS Compliant

### description

The CLE310F is an 850nm, high efficiency, AlGaAs infrared emitting diode. Output typically exceeds standard AlGaAs emitters by 50%. The CLE310F is intended for applications requiring high power output and narrow radiation pattern. Contact Clairex for alternative wavelength emitter chips, different lenses and lead configurations.

### absolute maximum ratings ( $T_A = 25^\circ\text{C}$ unless otherwise stated)

storage temperature .....	-40°C to +125°C
operating temperature .....	-40°C to +125°C
lead soldering temperature <sup>(1)</sup> .....	260°C
continuous forward current <sup>(2)</sup> .....	50mA
peak forward current (1.0ms pulse width, 10% duty cycle).....	1A
reverse voltage .....	5V
continuous power dissipation <sup>(3)</sup> .....	80mW

### notes:

1. 0.06" (1.5mm) from case for 5 seconds maximum.
2. Derate linearly 0.40mA/°C from 25°C free air temperature to  $T_A = +125^\circ\text{C}$ .
3. Derate linearly 0.64mW/°C from 25°C free air temperature to  $T_A = +125^\circ\text{C}$ .
4. Other wavelength die are available in this package.

### electrical characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

symbol	parameter	min	typ	max	units	test conditions
P <sub>O</sub>	Total power output	1.5	2.0	-	mW	I <sub>F</sub> = 20mA
V <sub>F</sub>	Forward voltage	-	1.4	1.6	V	I <sub>F</sub> = 20mA
I <sub>R</sub>	Reverse current	-	-	10	µA	V <sub>R</sub> = 5V
λ <sub>p</sub>	Peak emission wavelength	-	850	-	nm	I <sub>F</sub> = 20mA
BW	Spectral bandwidth at half power points	-	50	-	nm	I <sub>F</sub> = 20mA
θ <sub>HP</sub>	Emission angle at half power points	-	10	-	deg.	I <sub>F</sub> = 20mA
t <sub>r</sub>	Radiation rise time <sup>(5)</sup>	-	11	-	ns	I <sub>F(PK)</sub> = 20mA
t <sub>f</sub>	Radiation fall time <sup>(5)</sup>	-	7.0	-	ns	I <sub>F(PK)</sub> = 20mA

Note: 5. f = 100kHz, D.C. = 50%. Pulse generator t<sub>r</sub> and t<sub>f</sub> <200ps.

Clairex reserves the right to make changes at any time to improve design and to provide the best possible product.

Revised 11/08/06