



1. Mechanical Dimensions:

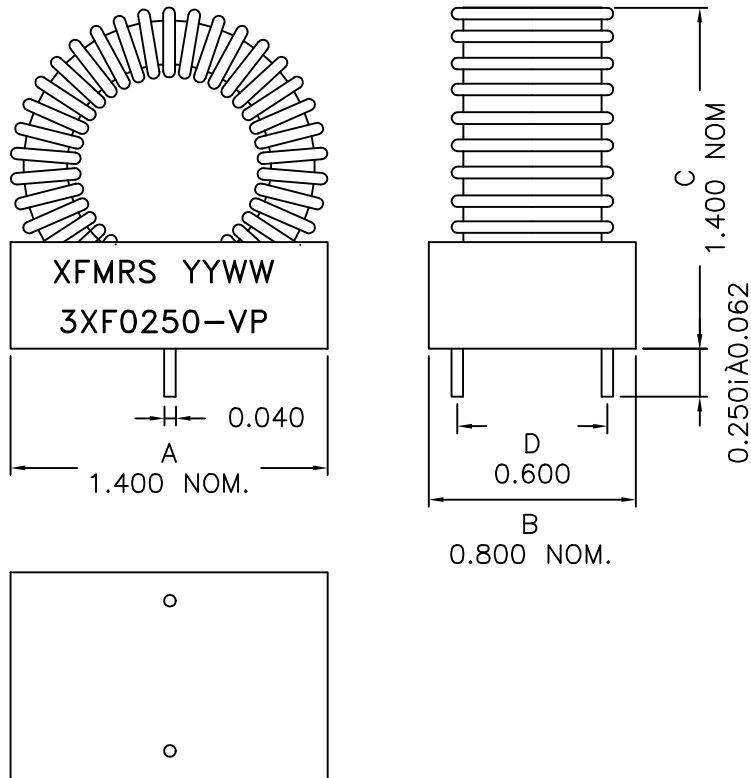

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 250uH±10% @1.0KHz 1.0V
 Current Rating: 3.0ADC Maximum 15% drop in OCL
 DC Resistance: 0.070 Ohms Maximum

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

DOC. REV A/2

XFMRs Inc	Title: TOROIDAL INDUCTOR		
	UNLESS OTHERWISE SPECIFIED		P/N: 3XF0250-VP
TOLERANCES:		REV A	
.xxx ±0.010		DWN.	李小锋 JUN-05-01
Dimensions in INCH		CHK.	廖玉坤 JUN-05-01
SHEET 1 OF 1	APP.	BW	JUN-05-01