



240 Output LCD Segment/Common Driver

Features

(Segment mode)

- Shift Clock frequency:
20 MHz (Max.) ($V_{DD} = 5 V \pm 10\%$)
12 MHz (Max.) ($V_{DD} = 2.5V - 4.5V$)
- Adopts a data bus system
- 4-bit/8-bit parallel input modes are selectable with a mode (MD) pin
- Automatic transfer function with an enable signal
- Automatic counting function when in "chip select" mode, which causes the internal clock to be stopped by automatically counting 240 bits of input data

(Common mode)

- Shift clock frequency :
4.0 MHz (Max.)
- Built-in 240-bits bidirectional shift register (divisible into 120-bits x 2)

General Description

The NT7704 is a 240-bit output segment/common driver LSI suitable for driving large scale dot matrix LCD panels used by PDA's, personal computers and work stations for example. Through the use of COG technology, it is ideal for substantially decreasing the size of the frame section of the LCD module. The NT7704 is good as both a segment driver and as a common driver, and a low power consuming, high-


- Available in a single mode (240-bits shift register) or in a dual mode(120-bits shift register x 2)
 - 1. Y1 → Y240 Single mode
 - 2. Y240 → Y1 Single mode
 - 3. Y1 → Y120, Y121 → Y240 Dual mode
 - 4. Y240 → Y121, Y120 → Y1 Dual mode
- The above 4 shift directions are pin-selectable

(Both for segment mode and common mode)


- Supply voltage for LCD driver: 15.0 to 30.0 V
- Number of LCD driver outputs: 240
- Low output impedance
- Low power consumption
- Supply voltage for the logic system: +2.5 to +5.5 V
- COMS process
- Package: Gold bump die / 272 Pin TCP(Tape Carrier Package)
- Not designed or rated as radiation hardened

precision LCD panel display can be assembled using the NT7704. In the segment mode, the data input is selected as 4bit parallel input mode or as 8bit parallel input mode by a mode (MD) pin. In the common mode, the data input/output pins are bi-directional and the four data shift directions are pin-selectable.


Pin Configuration

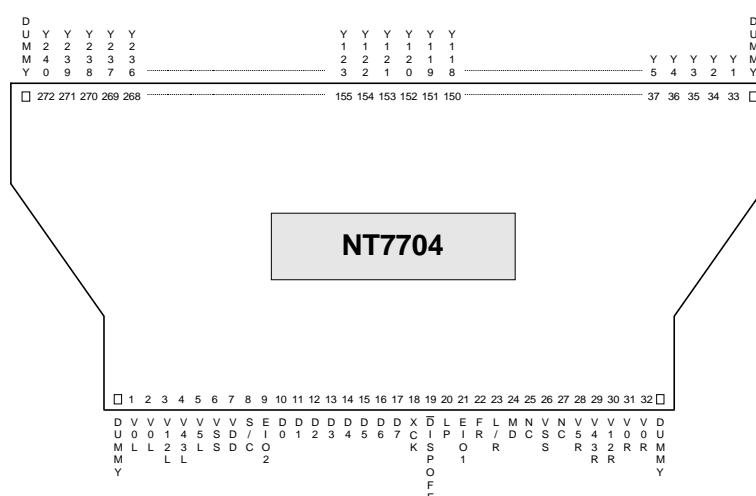

Pad Configuration


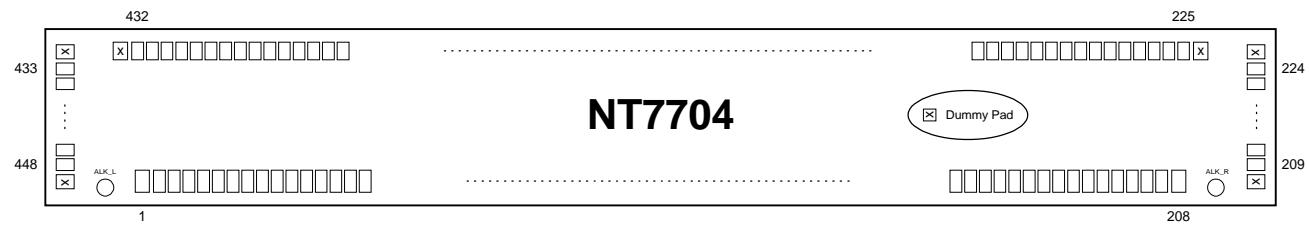



Block Diagram

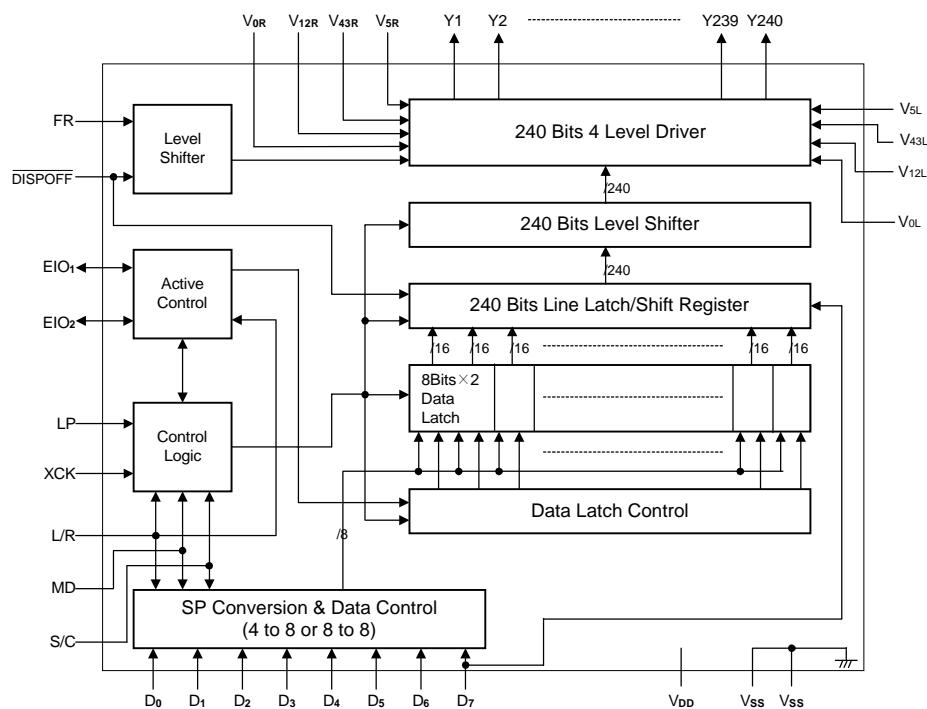


Pad Description

Pad No.	Designation	I/O	Description
1 - 12	V _{0L}	P	Power supply for LCD driver
13 - 20	V _{12L}	P	Power supply for LCD driver
21 - 28	V _{43L}	P	Power supply for LCD driver
29 - 40	V _{5L}	P	Power supply for LCD driver
41 - 66	V _{SS}	P	Ground (0V), these pads must be connected to each other
67 - 92	V _{DD}	P	Power supply for the logic system (+2.5 to +5.5V)
93 - 94	S/C	I	Segment mode/common mode selection
95 - 97	EIO ₂	I/O	Input/output for chip select or data of the shift register
98, 99, 100 - 116, 117, 118	D0 - D6	I	Display data input for segment mode
119 - 121	D7	I	Display data input for Segment mode/ Dual mode data input
122 - 124	XCK	I	Display data shift clock input for segment mode
125 - 127	DISPOFF	I	Control input for deselect output level
128 - 130	LP	I	Latch pulse input/shift clock input for the shift register
131 - 133	EIO ₁	I/O	Input/output for chip select or data of the shift register
134 - 136	FR	I	AC-converting signal input for LCD driver waveform
137 - 139	L/R	I	Display data shift direction selection
140 - 142	MD	I	Mode selection input
143 - 168	V _{SS}	P	Ground (0V), these pads must be connected to each other
169 - 180	V _{5R}	P	Power supply for LCD driver
181 - 188	V _{43R}	P	Power supply for LCD driver
189 - 196	V _{12R}	P	Power supply for LCD driver
197 - 208	V _{0R}	P	Power supply for LCD driver
209 - 448	Y1 - Y240	O	LCD driver output

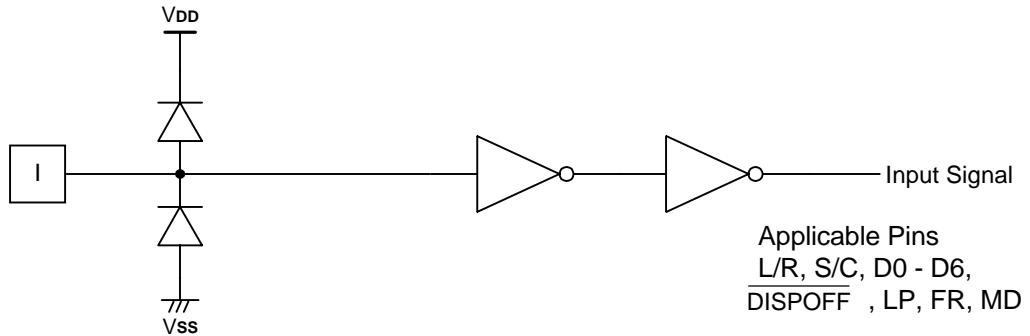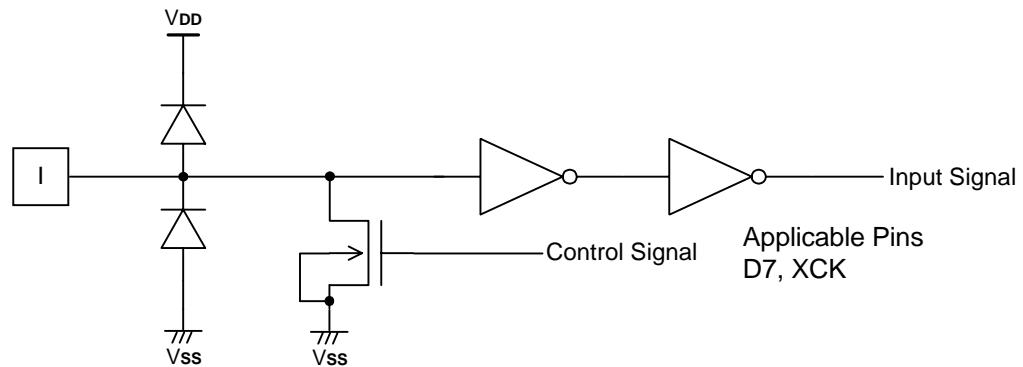Input / Output Circuits

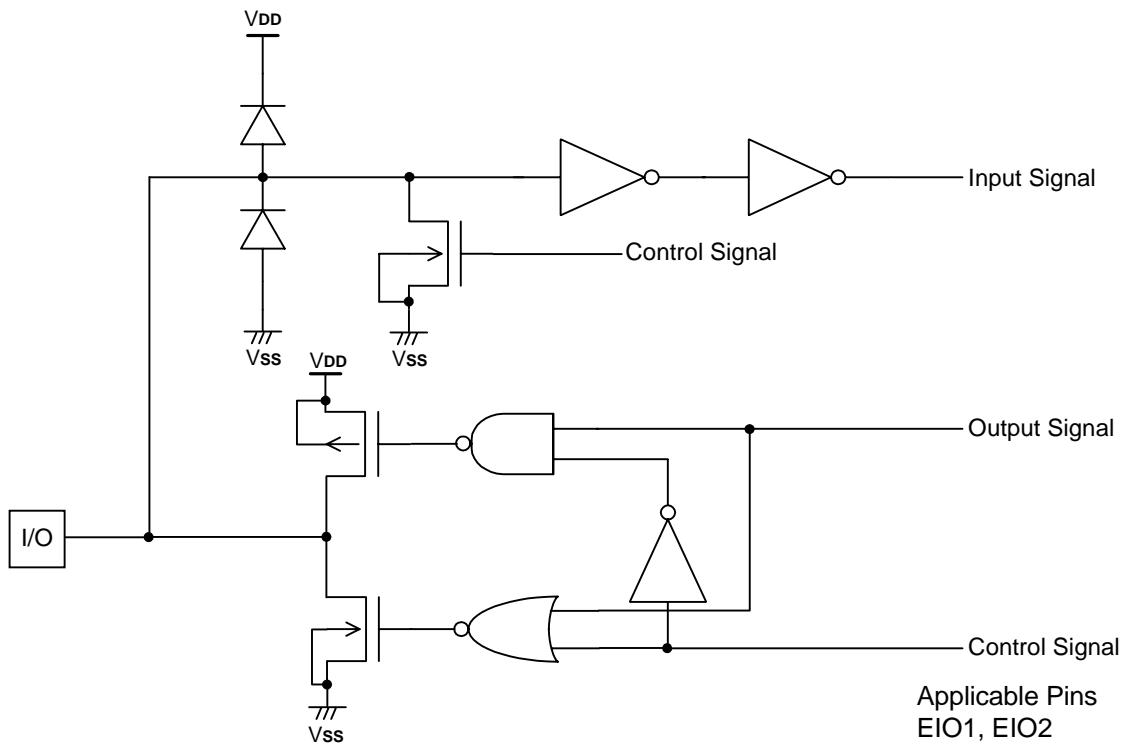Input Circuit (1)

Input Circuit (2)

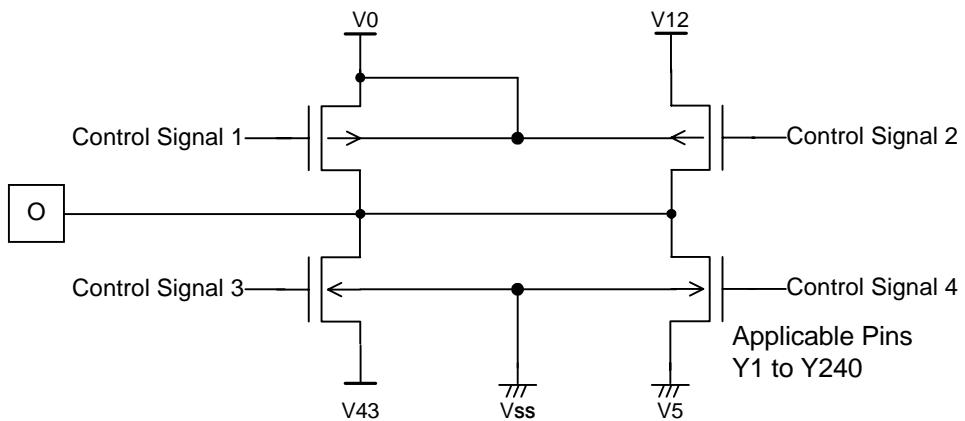

Input / Output Circuit



LCD Driver Output circuit

Pad Description

Segment mode

Symbol	Function
V _{DD}	Logic system power supply pin connects from +2.5 to +5.5V
V _{SS}	Ground pin connects to 0V
V _{O1R} , V _{O1L} V _{12R} , V _{12L} V _{43R} , V _{43L} V _{5R} , V _{5L}	Power supply pin for LCD driver voltage bias <ul style="list-style-type: none"> ● Normally, the bias voltage used is set by a resistor divider ● Ensure that the voltages are set such that V_{SS} ≤ V₅ < V₄₃ < V₁₂ < V_O ● To further reduce the differences between the output waveforms of the LCD driver output pins Y₁ and Y₂₄₀, externally connect V_{iR} and V_{iL} (I = 0, 12, 43, 5)
D ₀ - D ₇	Input pin for display data <ul style="list-style-type: none"> ● In 4-bit parallel input mode, input data into the 4 pins D₀ - D₃. Connect D₄ - D₇ to V_{SS} or V_{DD} ● In 8-bit parallel input mode, input data into the 8 pins D₀ - D₇
XCK	Clock input pin for taking display data <ul style="list-style-type: none"> ● Data is read on the falling edge of the clock pulse
LP	Latch pulse input pin for display data <ul style="list-style-type: none"> ● Data is latched on the falling edge of the clock pulse
L/R	Direction selection pin for reading display data <ul style="list-style-type: none"> ● When set to V_{SS} level "L", data is read sequentially from Y₂₄₀ to Y₁ ● When set to V_{DD} level "H", data is read sequentially from Y₁ to Y₂₄₀
DISPOFF	Control input pin for output deselect level <ul style="list-style-type: none"> ● The input signal is level-shifted from the logic voltage level to the LCD driver voltage level, and controls the LCD driver circuit. ● When set to V_{SS} level "L", the LCD driver output pins (Y₁-Y₂₄₀) are set to level V₅ ● When DISPOFF is set to "L", the contents of the line latch are reset, but the display data in the data latch are read regardless of the condition of DISPOFF. When the DISPOFF function is canceled, the driver outputs deselect level (V₁₂ or V₄₃), then outputs the contents of the date latch onto the next falling edge of the LP. At that time, if the DISPOFF removal time can not keep regulation with what is shown on the AC characteristics, then it can not output the reading data correctly.
FR	AC signal input for LCD driving waveform <ul style="list-style-type: none"> ● The input signal is level-shifted from the logic voltage level to the driver voltage level and controls the LCD driver circuit. ● It normally inputs a frame inversion signal The LCD driver output pin's output voltage level can be set to the line latch output signal and the FR signal
MD	Mode selection pin <ul style="list-style-type: none"> ● When set to V_{SS} level "L", 8-bit parallel input mode is set ● When set to V_{DD} level "H", 4-bit parallel input mode is set

Segment mode continued

Symbol	Function
S/C	Segment mode/common mode selection pin <ul style="list-style-type: none"> When set to V_{DD} level "H", segment mode is set When set to V_{SS} level "L", common mode is set
EIO1, EIO2	Input/output pin for chip selection <ul style="list-style-type: none"> When L/R input is at V_{SS} level "L", EIO1 is set for output, and EIO2 is set for input When L/R input is at V_{DD} level "H", EIO1 is set for input, and EIO2 is set for output During output, it is set to "H" while LP* \overline{XCK} is "H" and then after 240-bits of data have been read, it is set to "L" for one cycle (from falling edge to falling edge of XCK), after which it returns to "H" During input, after the LP signal is input, the chip is selected while EI is set to "L". After 240-bits of data have been read, the chip is deselected
Y1 - Y ₂₄₀	LCD driver output pins These correspond directly to each bit of the data latch, one level (V_0 , V_{12} , V_{43} , or V_5) is selected and output

Common mode

Symbol	Function
V_{DD}	Logic system power supply pin connects to +2.5 to +5.5V
V_{SS}	Ground pin connects to 0V
V_{0R} , V_{0L} V_{12R} , V_{12L} V_{43R} , V_{43L} V_{5R} , V_{5L}	Power supply pin for LCD driver voltage bias. <ul style="list-style-type: none"> Normally, the bias voltage used is set by a resistor divider Ensure the voltages are set such that $V_{SS} \leq V_5 < V_{43} < V_{12} < V_0$ To further reduce the differences between the output waveforms of the LCD driver output pins Y1 and Y ₂₄₀ , externally connect V_{iR} and V_{iL} ($i = 0, 12, 43, 5$)
EIO1	Bi-directional shift register shift data input/output pin <ul style="list-style-type: none"> Is an output pin when L/R is at V_{SS} level "L" and is an input pin when L/R is at V_{DD} level "H" When EIO1 is used as an input pin, it will be pulled-down When EIO1 is used as an output pin, it won't be pulled-down
EIO2	Bi-directional shift register shift data input/output pin <ul style="list-style-type: none"> Is an input pin when L/R is at V_{SS} level "L" and is an output pin when L/R is at V_{DD} level "H" When EIO2 is used as an input pin, it will be pulled-down When EIO2 is used as an output pin, it won't be pulled-down
LP	Bi-directional shift register shift clock pulse input pin <ul style="list-style-type: none"> Data is shifted on the falling edge of the clock pulse
L/R	Bi-directional shift register shift direction selection pin <ul style="list-style-type: none"> Data is shifted from Y₂₄₀ to Y1 when it is set to V_{SS} level "L", and data is shifted from Y1 to Y₂₄₀ when it is set to V_{DD} level "H"

Common mode continued

Symbol	Function
DISPOFF	Control input pin for output deselect level <ul style="list-style-type: none"> The input signal is level-shifted from the logic voltage level to the LCD driver voltage level, and controls the LCD driver circuit When set to V_{SS} level "L", the LCD driver output pins (Y_1-Y_{240}) are set to level V_5 While set to "L", the contents of the shift register are reset and are not reading data. When the <u>DISPOFF</u> function is canceled, the driver outputs deselect level (V_{12} or V_{43}), and the shift data is read on the falling edge of the LP. At that time, if the <u>DISPOFF</u> removal time can not keep regulation with what is shown on the AC characteristics, the shift data is not read correctly
FR	AC signal input for LCD driving waveform <ul style="list-style-type: none"> The input signal is level-shifted from logic voltage level to the LCD driver voltage level, and it controls the LCD driver circuit Normally, it inputs a frame inversion signal The LCD driver output pin's output voltage level can be set using the shift register output signal and the FR signal
MD	Mode selection pin <ul style="list-style-type: none"> When set to V_{SS} level "L", Single Mode operation is selected. When set to V_{DD} level "H", Dual Mode operation is selected
D ₇	Dual Mode data input pin <ul style="list-style-type: none"> According to the data shift direction of the data shift register, data can be input starting from the 121st bit When the chip is used in Dual Mode, D₇ will be pulled-down When the chip is used in Single Mode, D₇ won't be pulled-down
S/C	Segment mode/common mode selection pin <ul style="list-style-type: none"> When set to V_{SS} level "L", common mode is set
D ₀ - D ₆	Not used <ul style="list-style-type: none"> Connect D₀-D₆ to V_{SS} or V_{DD}. Avoid floating
XCK	Not used <ul style="list-style-type: none"> XCK is pull-down in common mode, so connect to V_{SS} or leave open
$Y_1 - Y_{240}$	LCD driver output pins <ul style="list-style-type: none"> These correspond directly to each bit of the shift register, one level (V_0, V_{12}, V_{43}, or V_5) is selected and output

Functional Description

1. Block description

1.1 Active Control

In segment mode, it controls the selection or deselection of the chip. Following a LP signal input, and after the select signal is input, a select signal is generated internally until 240 bits of data have been read in. Once data input has been completed, a select signal for cascade connection is output, and the chip is deselected.

In common mode, it controls the input/output data of the bi-directional pins.

1.2. SP Conversion & Data Control

In segment mode, it keeps input data which are 2 clocks of XCK at 4-bit parallel mode into latch circuit, or keeps input data which are 1 clock of XCK at 8-bit parallel mode into latch circuit, after that they are put on the internal data bus 8 bits at a time.

1.3. Data Latch Control

In segment mode, it selects the state of the data latch, which reads in the data bus signals. The shift direction is controlled by the control logic and for every 16 bits of data read in, the selection signal shifts one bit, based on the state of the control circuit.

1.4. Data Latch

In segment mode, it latches the data on the data bus. The latched state of each LCD driver output pin is controlled by the control logic and the data latch control. 240 bits of data are read in 20 sets of 8 bits.

1.5. Line Latch/Shift Register

In segment mode, it ensures all 240 bits which have been read into the data latch, are simultaneously latched on to the falling edge of the LP signal, and output to the level shift block.

In common mode, it shifts data from the data input pin on to the falling edge of the LP signal.

1.6. Level Shifter

It ensures the logic voltage signal is level-shifted to the LCD driver voltage level, and output to the driver block.

1.7. 4-Level Driver

It drives the LCD driver output pins from the line latch/shift register data, selecting one of 4 levels (V_0 , V_{12} , V_{43} , V_5) based on the S/C, FR and DISPOFF signals.

1.8. Control Logic

Controls the operation of each block. In segment mode, when an LP signal has been input, all blocks are reset and the control logic waits for the selection signal output from the active control block. Once the selection signal has been output, operation of the data latch and data transmission are controlled, 240 bits of data are read in, and the chip is deselected.

In common mode, it controls the direction of data shift.

2. LCD Driver Output Voltage Level

The relationship between the data bus signal, AC converted signal FR and LCD driver output voltage is as shown in the table below:

2.1. Segment Mode

FR	Latch Data	DISPOFF	Driver Output Voltage Level (Y1 - Y240)
L	L	H	V ₄₃
L	H	H	V ₅
H	L	H	V ₁₂
H	H	H	V ₀
X	X	L	V ₅

Here, V_{SS} ≤ V₅ < V₄₃ < V₁₂ < V₀, H: V_{DD} (+2.5 to +5.5V), L: V_{SS} (0V), X: Don't care

2.2. Common Mode

FR	Latch Data	DISPOFF	Driver Output Voltage Level (Y1 - Y240)
L	L	H	V ₄₃
L	H	H	V ₀
H	L	H	V ₁₂
H	H	H	V ₅
X	X	L	V ₅

Here, V_{SS} ≤ V₅ < V₄₃ < V₁₂ < V₀, H: V_{DD} (+2.5 to +5.5V), L: V_{SS} (0V), X: Don't care

Note: There are two kinds of power supply (logic level voltage, LCD driver voltage) for the LCD driver. Please supply regular voltage which is assigned by specification for each power pin.

That time "Don't care" should be fixed to "H" or "L", avoiding floating.

3. Relationship between the Display Data and Driver Output pins

3.1. Segment Mode:

(a) 4-bit Parallel Mode

MD	L/R	EIO1	EIO2	Data Input	Number of Clock						
					60clock	59clock	58clckok	~	3clock	2clock	1clock
H	L	Output	Input	D0	Y1	Y5	Y9	~	Y229	Y233	Y237
				D1	Y2	Y6	Y10	~	Y230	Y234	Y238
				D2	Y3	Y7	Y11	~	Y231	Y235	Y239
				D3	Y4	Y8	Y12	~	Y232	Y236	Y240
H	H	Input	Output	D0	Y240	Y236	Y232	~	Y12	Y8	Y4
				D1	Y239	Y235	Y231	~	Y11	Y7	Y3
				D2	Y238	Y234	Y230	~	Y10	Y6	Y2
				D3	Y237	Y233	Y229	~	Y9	Y5	Y1

(b) 8-bit Parallel Mode

MD	L/R	EIO1	EIO2	Data Input	Number of Clock						
					30clock	29clock	28clckok	~	3clock	2clock	1clock
L	L	Output	Input	D0	Y1	Y9	Y17	~	Y217	Y225	Y233
				D1	Y2	Y10	Y18	~	Y218	Y226	Y234
				D2	Y3	Y11	Y19	~	Y219	Y227	Y235
				D3	Y4	Y12	Y20	~	Y220	Y228	Y236
				D4	Y5	Y13	Y21	~	Y221	Y229	Y237
				D5	Y6	Y14	Y22	~	Y222	Y230	Y238
				D6	Y7	Y15	Y23	~	Y223	Y231	Y239
				D7	Y8	Y16	Y24	~	Y224	Y232	Y240
L	H	Input	Output	D0	Y240	Y232	Y224	~	Y24	Y16	Y8
				D1	Y239	Y231	Y223	~	Y23	Y15	Y7
				D2	Y238	Y230	Y222	~	Y22	Y14	Y6
				D3	Y237	Y229	Y221	~	Y21	Y13	Y5
				D4	Y236	Y228	Y220	~	Y20	Y12	Y4
				D5	Y235	Y227	Y219	~	Y19	Y11	Y3
				D6	Y234	Y226	Y218	~	Y18	Y10	Y2
				D7	Y233	Y225	Y217	~	Y17	Y9	Y1

3.2. Common Mode


MD	L/R	Data Transfer Direction	EIO1	EIO2	D7
L (Single)	L (shift to left)	Y240 to Y1	Output	Input	X
	H (shift to right)	Y1 to Y240	Input	Output	X
H (Dual)	L (shift to left)	Y240 to Y121 Y120 to Y1	Output	Input	Input
	H (shift to right)	Y1 to Y120 Y121 to Y240	Input	Output	Input

Here, L: V_{SS} (0V), H: V_{DD} (+2.5V to +5.5V), X: Don't care


Note: "Don't care" should be fixed to "H" or "L", avoiding floating.

4. Connection Examples of Segment Drivers


4.1. Case of L/R = "L"

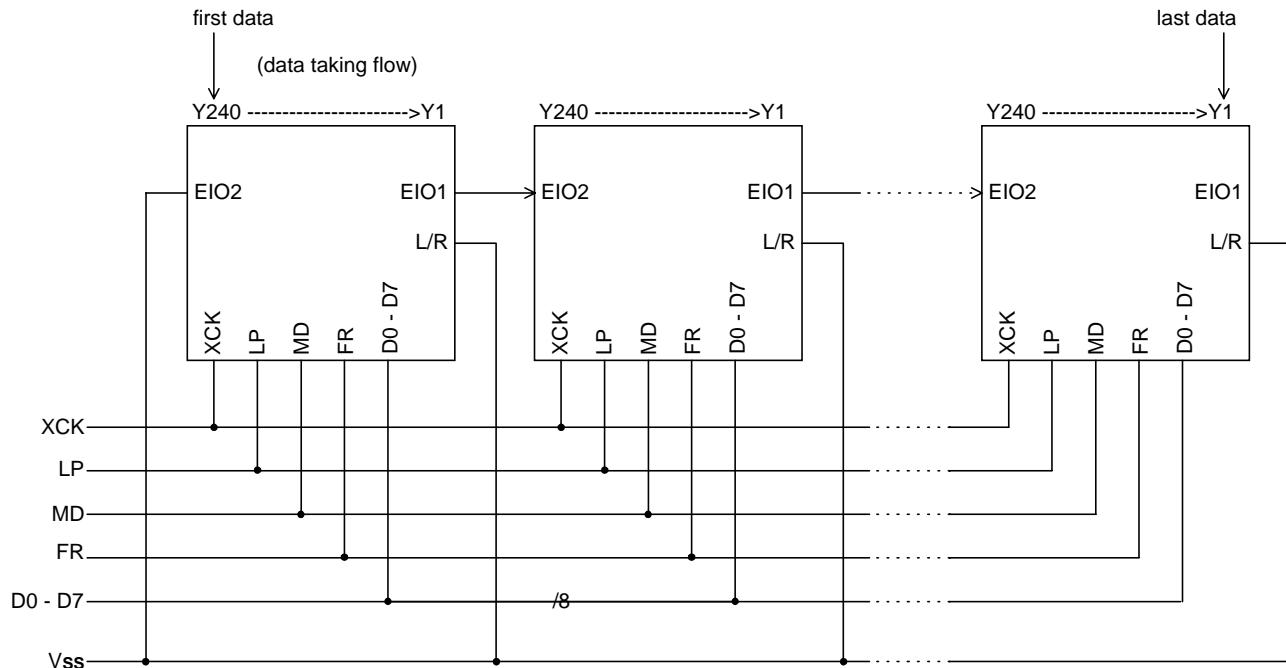



4.2. Case of L/R = "H"

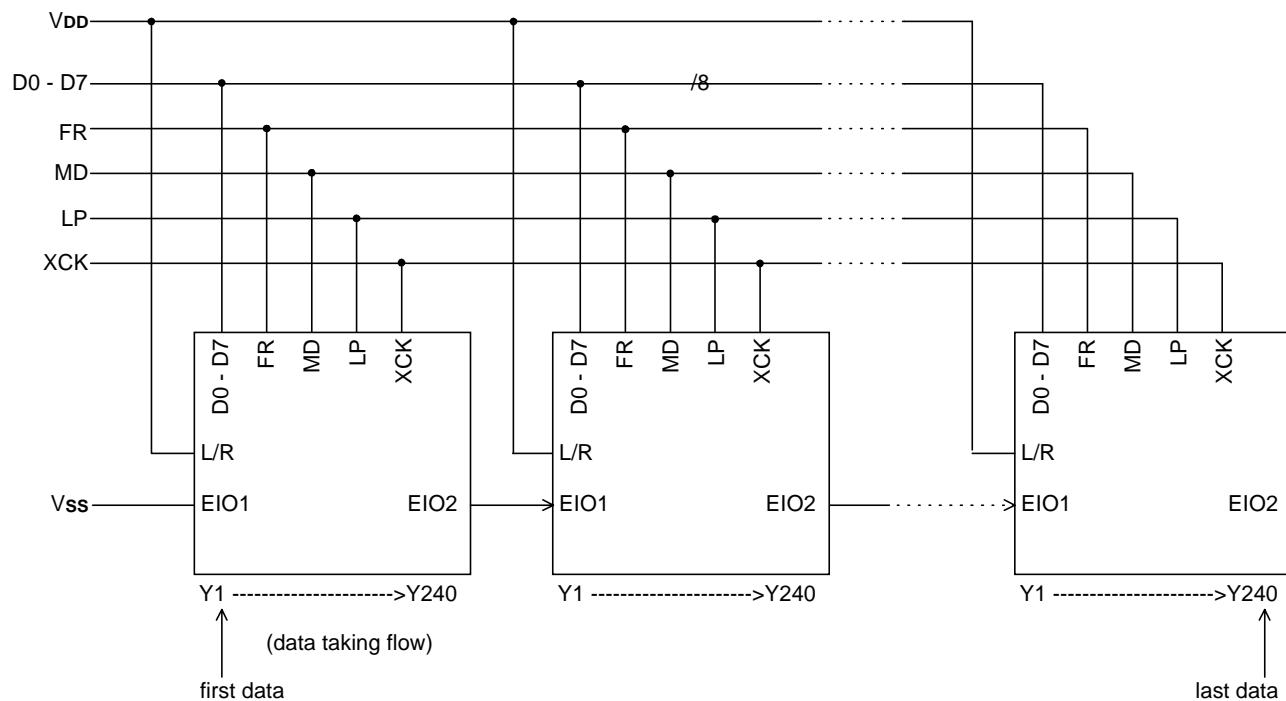


5. Timing waveform of 4-Device cascade Connection of Segment Drivers

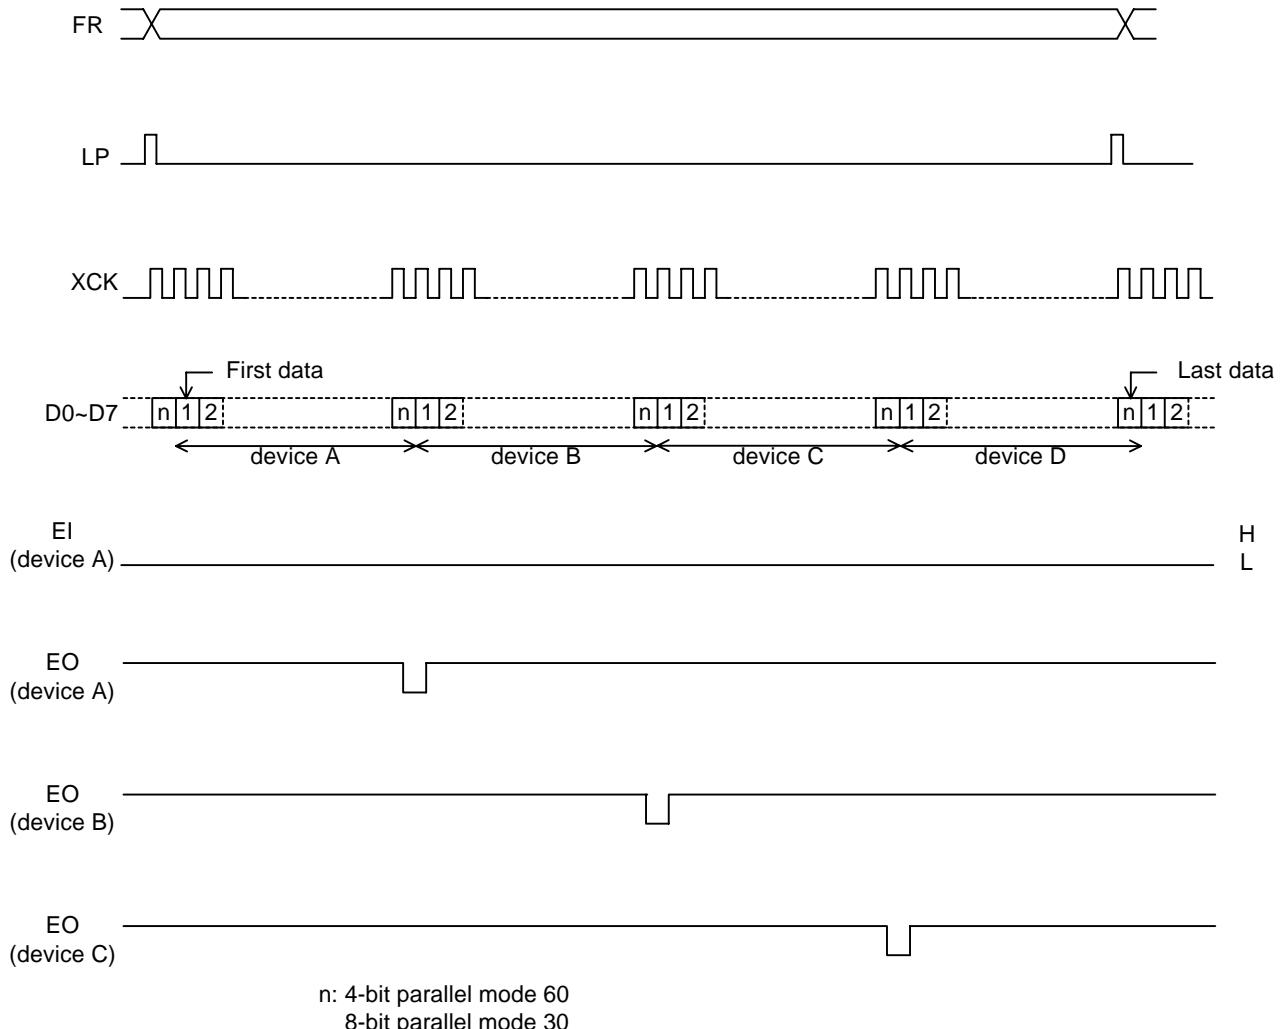


6. Connection Examples for Common Drivers

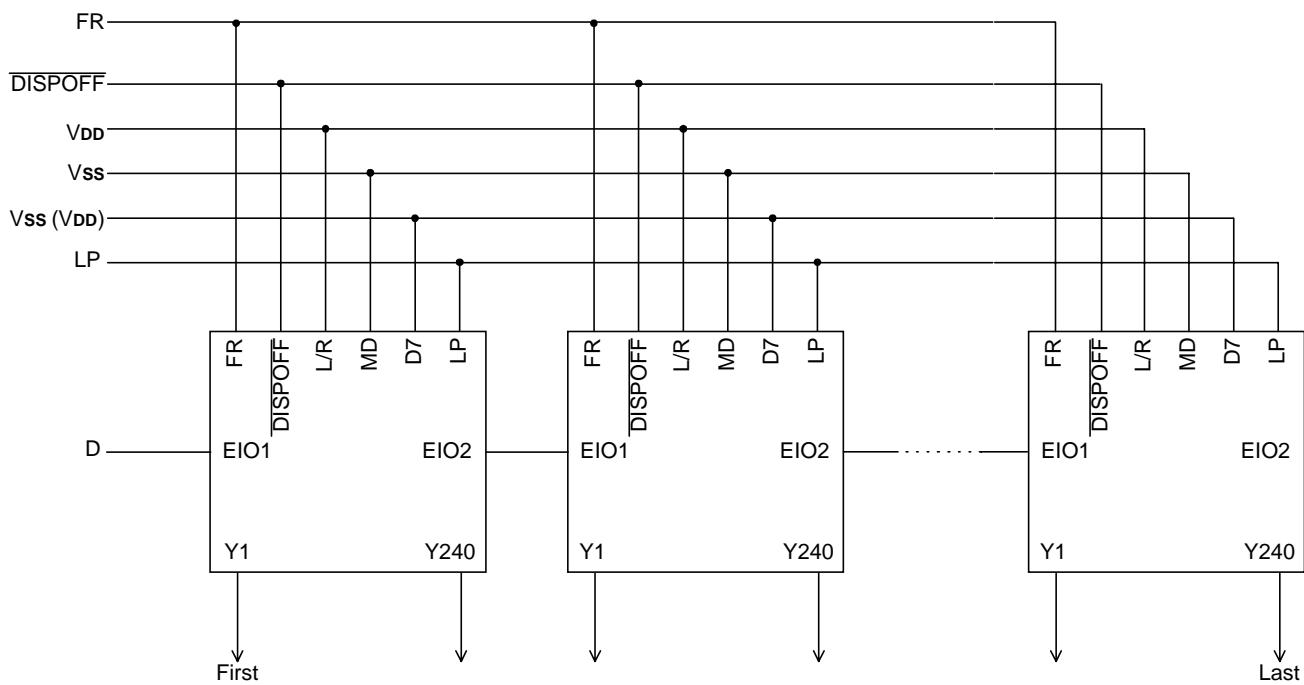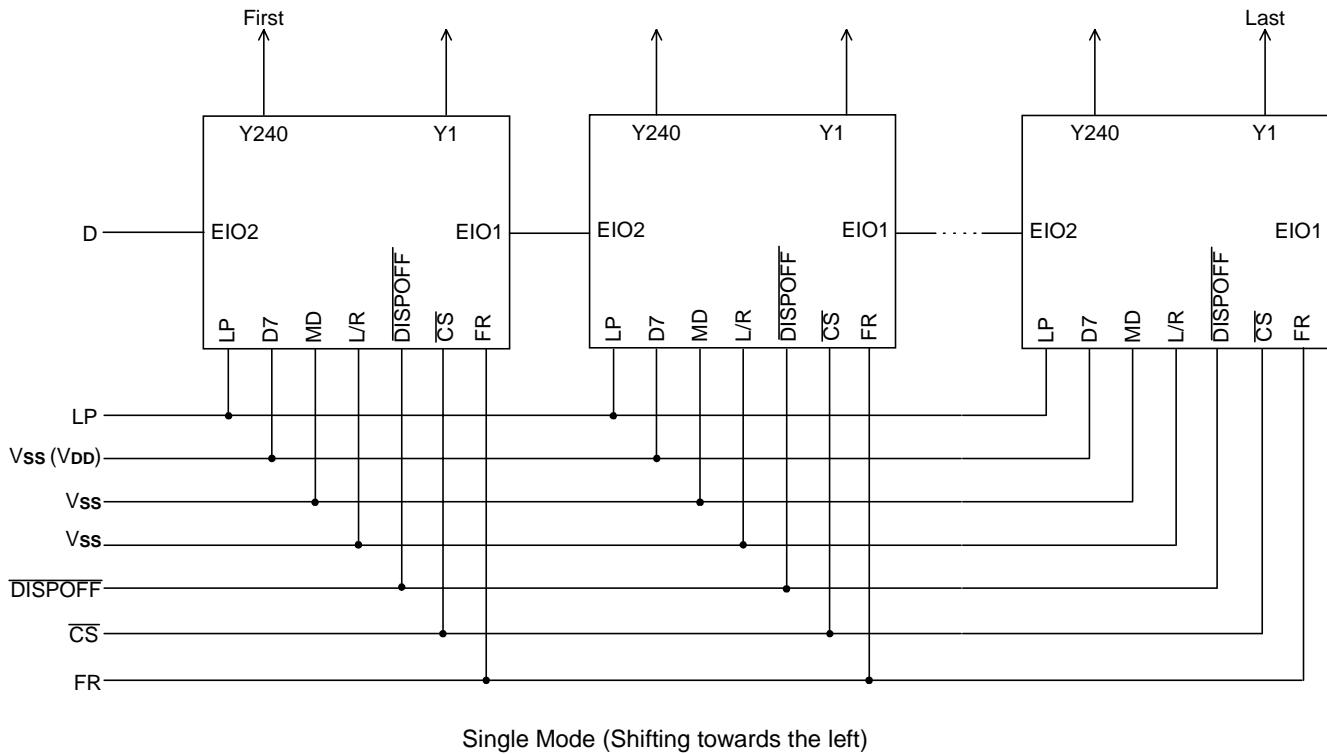

Single Mode (Sifting towards the right)

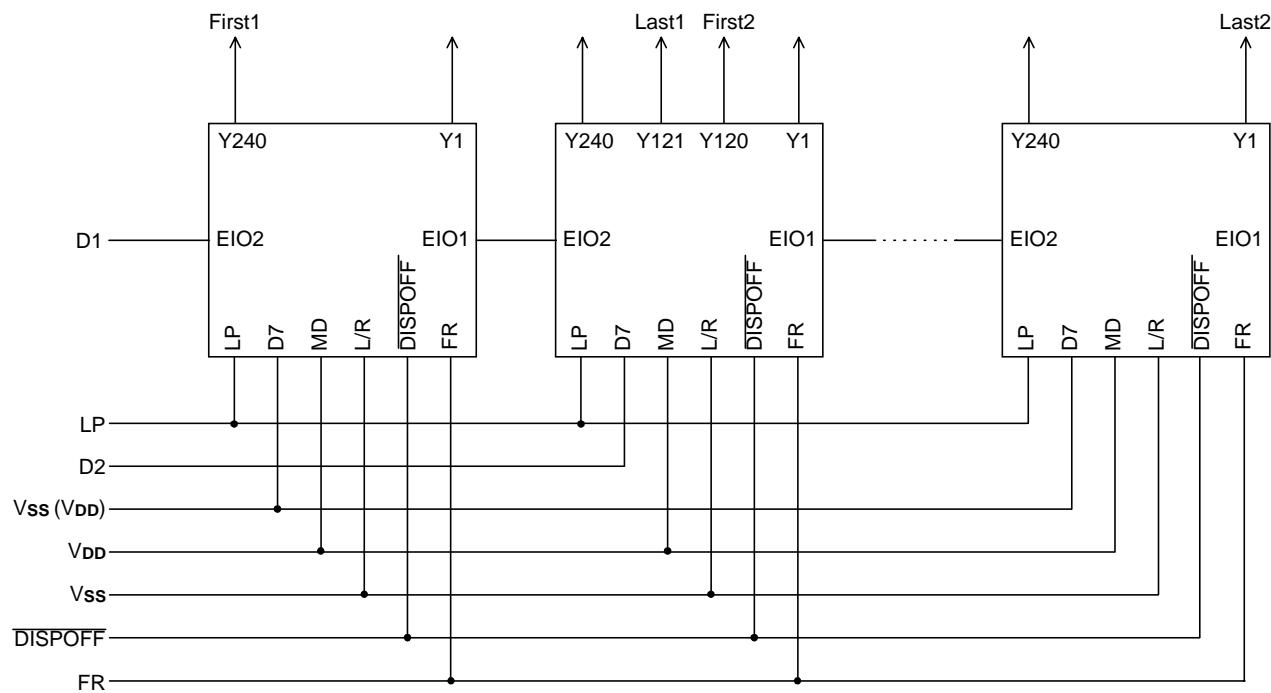

Dual mode (Shifting towards the left)

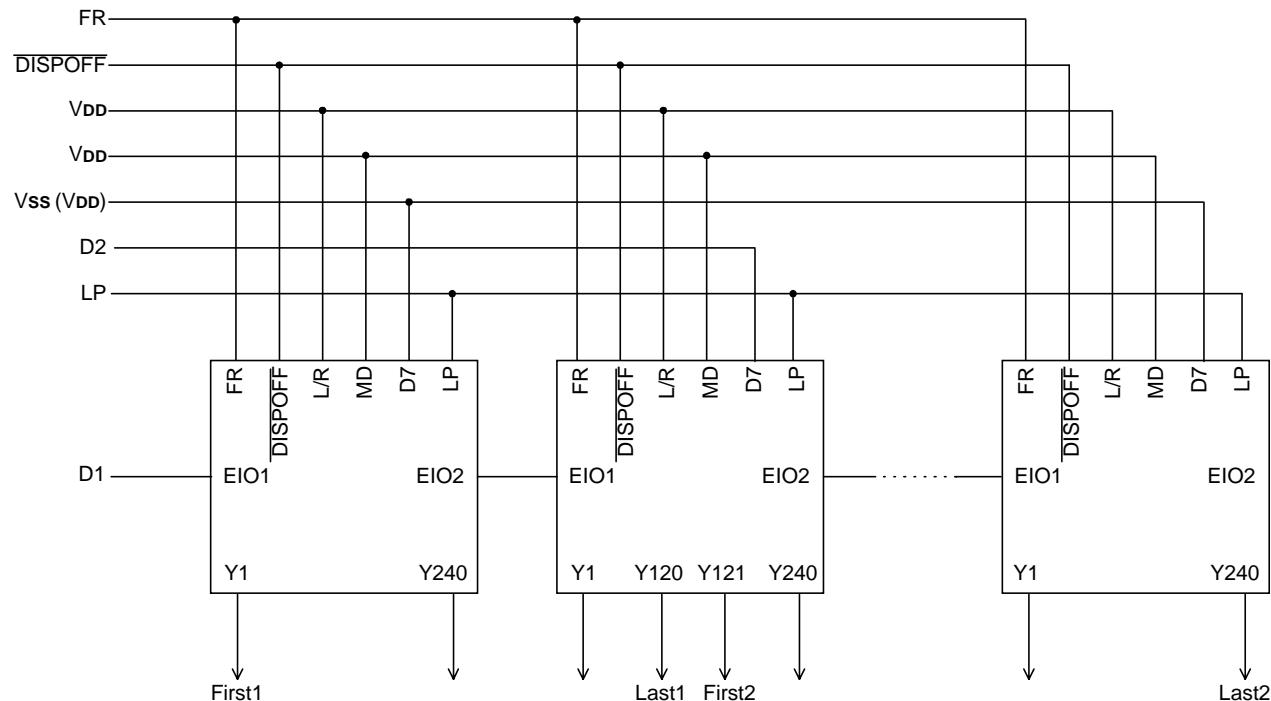

Dual mode (Shifting towards the right)

7. Precaution

Be careful when connecting or disconnecting the power


This LSI has a high-voltage LCD driver, so it may be permanently damaged by a high current, which may occur if voltage is supplied to the LCD driver power supply while the logic system power supply is floating.

The details are as follows:

- When connecting the power supply, connect the LCD driver power after connecting the logic system power. Furthermore, when disconnecting the power, disconnect the logic system power after disconnecting the LCD driver power.
- We recommend that you connect a serial resistor (50-100 Ω) or fuse to the LCD driver power V_o of the system as a current limiting device. Also, set a suitable value of the resistor in consideration of LCD display grade.

In addition, when connecting the logic power supply, the logic condition of the LSI inside is insecure. Therefore, connect the LCD driver power supply only after resetting the logic condition of this LSI inside to the DISPOFF function. After that, the DISPOFF cancel the function after the LCD driver power supply has become stable. Furthermore, when disconnecting the power, set the LCD driver output pins to level V_5 on the DISPOFF function. After that, disconnect the logic system power after disconnecting the LCD driver power.

When connecting the power supply, follow the recommended sequence shown.

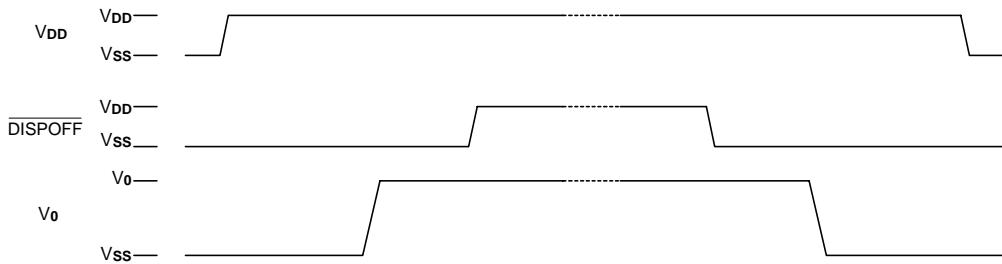

Absolute Maximum Rating*

DC Supply Voltage V_{DD}	-0.3V to +7.0V
DC Supply Voltage V_O	-0.3V to +30V
Input Voltage	-0.3V to V_{DD} +0.3V
Operating Ambient Temperature	-30°C to +85°C
Storage Temperature	-45°C to +125°C

***Comments**

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to this device. These are stress ratings only. Functional operation of this device under these or any other conditions above those indicated in the operational sections of this specification is not implied or intended. Exposure to the absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics
DC Characteristics

Segment Mode ($V_{SS} = V_5 = 0V$, $V_{DD} = 2.5 - 5.5V$, $V_O = 15$ to 30 V, and $T_A = -30$ to +85°C, unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition		
Operating Voltage 1	V_{DD}	2.5	-	5.5	V			
Operating Voltage 2	V_O	15	-	30	V			
Input high voltage	V_{IH}	0.8 V_{DD}	-	-	V	D0 - 7, XCK, LP, L/R, FR, MD, S/C, EIO ₁ , EIO ₂ , DISPOFF pins		
Input low voltage	V_{IL}	-	-	0.2 V_{DD}	V			
Output high voltage	V_{OH}	$V_{DD} - 0.4$	-	-	V	EIO ₁ , EIO ₂ pins, $I_{OH} = -0.4mA$		
Output low voltage	V_{OL}	-	-	+0.4	V	EIO ₁ , EIO ₂ pins, $I_{OL} = +0.4mA$		
Input leakage current 1	I_{IH}	-	-	+1.0	μA	D0 - 7, XCK, LP, L/R, FR, MD, S/C, EIO ₁ , EIO ₂ , DISPOFF pins, $V_I = V_{DD}$		
Input leakage current 2	I_{IL}	-	-	-1.0	μA			
Output resistance	R_{ON}	-	1.5	2.0	$k\Omega$	$V_O = +30.0V$	$Y_1 - Y_{240}$ pins,	
		-	2.0	2.5		$V_O = +20.0V$	$ \Delta V_{ON} = 0.5V$	
Stand-by current	I_{SB}	-	-	10	μA	V_{SS} pin, Note 1		
Consumed current (1) (Deselection)	I_{DD1}	-	-	2	mA	V_{DD} pin, Note 2		
Consumed current (2) (Selection)	I_{DD2}	-	-	12	mA	V_{DD} pin, Note 3		
Consumed current	I_O	-	-	1.5	mA	V_O pin, Note 4		

Note:

1. $V_{DD} = +5.0V$, $V_O = +30V$, $V_I = V_{SS}$
2. $V_{DD} = +5.0V$, $V_O = +30V$, $f_{XCK} = 20MHz$, No-load, $EI = V_{DD}$
The input data is turned over by the data taking clock (4-bit Parallel input mode)
3. $V_{DD} = +5.0V$, $V_O = +30V$, $f_{XCK} = 20MHz$, No-load. $EI = V_{SS}$
The input data is turned over by the data taking clock (4-bit parallel input mode)
4. $V_{DD} = +5.0V$, $V_O = +30V$, $f_{XCK} = 20MHz$, $f_{LP} = 41.6kHz$, $f_{FR} = 80 Hz$, No-load
The input data is turned over by the data taking clock (4-bit parallel-input mode)

Common Mode ($V_{SS} = V_5 = 0V$, $V_{DD} = 2.5 - 5.5V$, $V_{O} = 15$ to $30V$, and $T_A = -30$ to $+85^{\circ}C$, unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition	
Operating Voltage	V_{DD}	2.5	-	5.5	V		
Operating Voltage	V_O	15	-	30	V		
Input high voltage	V_{IH}	0.8 V_{DD}	-	-	V	D0 - 7, XCK, LP, L/R, FR, MD, S/C, EIO1, EIO2, <u>DISPOFF</u> pins	
Input low voltage	V_{IL}	-	-	0.2 V_{DD}	V		
Output high voltage	V_{OH}	$V_{DD} - 0.4$	-	-	V	EIO1, EIO2 pins, $I_{OH} = -0.4mA$	
Output low voltage	V_{OL}	-	-	+0.4	V	EIO1, EIO2 pins, $I_{OL} = +0.4mA$	
Input leakage current 1	I_{IH}	-	-	+1.0	μA	D0 - 6, LP, L/R, FR, MD, S/C and <u>DISPOFF</u> pins, $V_I = V_{DD}$	
Input leakage current 2	I_{IL}	-	-	-1.0	μA	D0 - 7, XCK, LP, L/R, FR, MD, S/C, EIO1, EIO2, <u>DISPOFF</u> pins, $V_I = V_{SS}$	
Input pull down current	I_{PD}	-	-	100	μA	XCK, EIO1, EIO2, D7 pins	
Output resistance	R_{ON}	-	1.5	2.0	$k\Omega$	$V_O = +30.0V$	Y1 - Y240 pins, $ \Delta V_{ON} = 0.5V$
		-	2.0	2.5		$V_O = +20.0V$	
Stand-by current	I_{SB}	-	-	10	μA	V_{SS} pin, Note 1	
Consumed current (1)	I_{DD}	-	-	120	μA	V_{DD} pin, Note 2	
Consumed current (2)	I_O	-	-	240	μA	V_O pin, Note 2	

Note:

1. $V_{DD} = +5.0V$, $V_O = +30.0V$, $V_I = V_{SS}$
2. $V_{DD} = +5.0V$, $V_O = +30.0V$, $f_{LP} = 41.6kHz$, $f_{FR} = 80Hz$, case of 1/480 duty operation, No-load

AC Characteristics

Segment Mode 1 ($V_{SS} = V_5 = 0V$, $V_{DD} = 4.5 - 5.5V$, $V_O = 15$ to $30V$, and $T_A = -30$ to $+85^\circ C$, unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Shift clock period	t_{WCK}	50	-		ns	$tr, tf \leq 10\text{ns}$, Note 1
Shift clock "H" pulse width	t_{WCKH}	15	-		ns	
Shift clock "L" pulse width	t_{WCKL}	15	-		ns	
Data setup time	t_{DS}	10	-		ns	
Data hole time	t_{DH}	12	-		ns	
Latch pulse "H" pulse width	t_{WLPH}	15	-		ns	
Shift clock rise to Latch pulse rise time	t_{LD}	0	-		ns	
Shift clock fall to Latch pulse fall time	t_{SL}	30	-		ns	
Latch pulse rise to Shift clock rise time	t_{LS}	25	-		ns	
Latch pulse fall to Shift clock rise time	t_{LH}	25	-		ns	
Input signal rise time	tr		-	50	ns	Note 2
Input signal fall time	tf		-	50	ns	Note 2
Enable setup time	ts	10	-		ns	
<u>DISPOFF</u> Removal time	t_{SD}	100	-		ns	
<u>DISPOFF</u> enable pulse width	t_{WDL}	1.2	-		μs	
Output delay time (1)	t_D		-	30	ns	$CL = 15\text{pF}$
Output delay time (2)	t_{PD1}, t_{PD2}		-	1.2	μs	$CL = 15\text{pF}$
Output delay time (3)	t_{PD3}		-	1.2	μs	$CL = 15\text{pF}$

Note:

1. Take the cascade connection into consideration.
2. $(t_{CK}-t_{WCKII}-t_{WCKL})/2$ is the maximum in the case of high speed operation.

Segment Mode 2 ($V_{SS} = V_5 = 0V$, $V_{DD} = 3.0 - 4.5V$, $V_O = 15$ to $30V$, and $T_A = -30$ to $+85^\circ C$, unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Shift clock period	t_{WCK}	66	-		ns	$tr, tf \leq 10\text{ns}$, Note 1
Shift clock "H" pulse width	t_{WCKH}	23	-		ns	
Shift clock "L" pulse width	t_{WCKL}	23	-		ns	
Data setup time	t_{DS}	15	-		ns	
Data hole time	t_{DH}	23	-		ns	
Latch pulse "H" pulse width	t_{WLPH}	30	-		ns	
Shift clock rise to Latch pulse rise time	t_{LD}	0	-		ns	
Shift clock fall to Latch pulse fall time	t_{SL}	50	-		ns	
Latch pulse rise to Shift clock rise time	t_{LS}	30	-		ns	
Latch pulse fall to Shift clock fall time	t_{LH}	30	-		ns	
Input signal rise time	tr		-	50	ns	Note 2
Input signal fall time	tf		-	50	ns	Note 2
Enable setup time	ts	15	-		ns	
<u>DISPOFF</u> Removal time	t_{SD}	100	-		ns	
<u>DISPOFF</u> enable pulse width	t_{WDL}	1.2	-		μs	
Output delay time (1)	td		-	41	ns	$CL = 15\text{pF}$
Output delay time (2)	$tpd1, tpd2$		-	1.2	μs	$CL = 15\text{pF}$
Output delay time (3)	$tpd3$		-	1.2	μs	$CL = 15\text{pF}$

Note:

1. Take the cascade connection into consideration.
2. $(t_{CK}-t_{WCKII}-t_{WCKL})/2$ is the maximum in the case of high speed operation.


Segment Mode 3 ($V_{SS} = V_5 = 0V$, $V_{DD} = 2.5 - 3.0V$, $V_O = 15$ to $30V$, and $T_A = -30$ to $+85^\circ C$, unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Shift clock period	t_{WCK}	82	-		ns	$tr, tf \leq 10\text{ns}$, Note 1
Shift clock "H" pulse width	t_{WCKH}	28	-		ns	
Shift clock "L" pulse width	t_{WCKL}	28	-		ns	
Data setup time	t_{DS}	20	-		ns	
Data hole time	t_{DH}	23	-		ns	
Latch pulse "H" pulse width	t_{WLPH}	30	-		ns	
Shift clock rise to Latch pulse rise time	t_{LD}	0	-		ns	
Shift clock fall to Latch pulse fall time	t_{SL}	65	-		ns	
Latch pulse rise to Shift clock rise time	t_{LS}	30	-		ns	
Latch pulse fall to Shift clock fall time	t_{LH}	30	-		ns	
Input signal rise time	tr		-	50	ns	Note 2
Input signal fall time	tf		-	50	ns	Note 2
Enable setup time	ts	15	-		ns	
<u>DISPOFF</u> Removal time	t_{SD}	100	-		ns	
<u>DISPOFF</u> enable pulse width	t_{WDL}	1.2	-		μs	
Output delay time (1)	td		-	57	ns	$CL = 15\text{pF}$
Output delay time (2)	$tpd1, tpd2$		-	1.2	μs	$CL = 15\text{pF}$
Output delay time (3)	$tpd3$		-	1.2	μs	$CL = 15\text{pF}$

Note:

1. Take the cascade connection into consideration.
2. $(t_{CK}-t_{WCKII}-t_{WCKL})/2$ is the maximum in the case of high speed operation.


Timing waveform of the Segment Mode

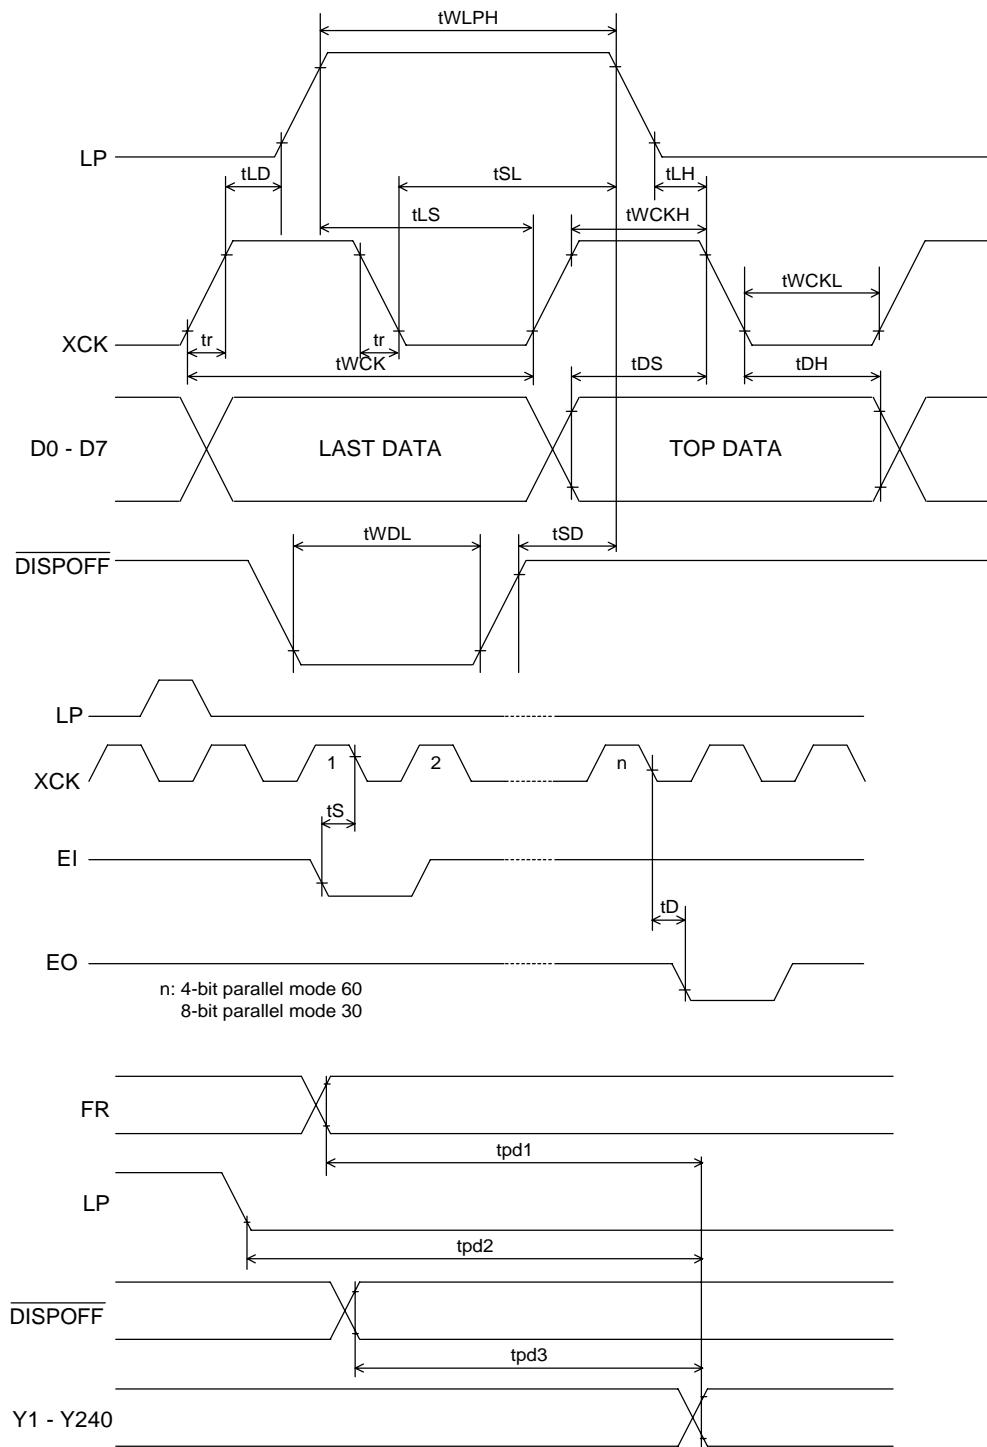


Common Mode ($V_{SS} = V_5 = 0V$, $V_{DD} = 2.5 - 5.5V$, $V_O = 15$ to $30V$ and $T_A = -30$ to $+85^\circ C$, unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Shift clock period	t_{WLP}	250	-	-	ns	$t_r, t_f \leq 20\text{ns}$
Shift clock "H" pulse width	t_{WLPH}	15	-	-	ns	$V_{DD} = +5.0V \pm 10\%$
		30	-	-	ns	$V_{DD} = +2.5 - +4.5V$
Data setup time	t_{SU}	30	-	-	ns	
Data hole time	t_H	50	-	-	ns	
Input signal rise time	t_r		-	50	ns	
Input signal fall time	t_f		-	50	ns	
<u>DISPOFF</u> Removal time	t_{SD}	100	-	-	ns	
<u>DISPOFF</u> enable pulse width	t_{WDL}	1.2	-	-	μs	
Output delay time (1)	t_{DL}	-	-	200	ns	$C_L = 15\text{pF}$
Output delay time (2)	t_{pd1}, t_{pd2}	-	-	1.2	μs	$C_L = 15\text{pF}$
Output delay time (3)	t_{pd3}	-	-	1.2	μs	$C_L = 15\text{pF}$

Timing Characteristics of Common Mode

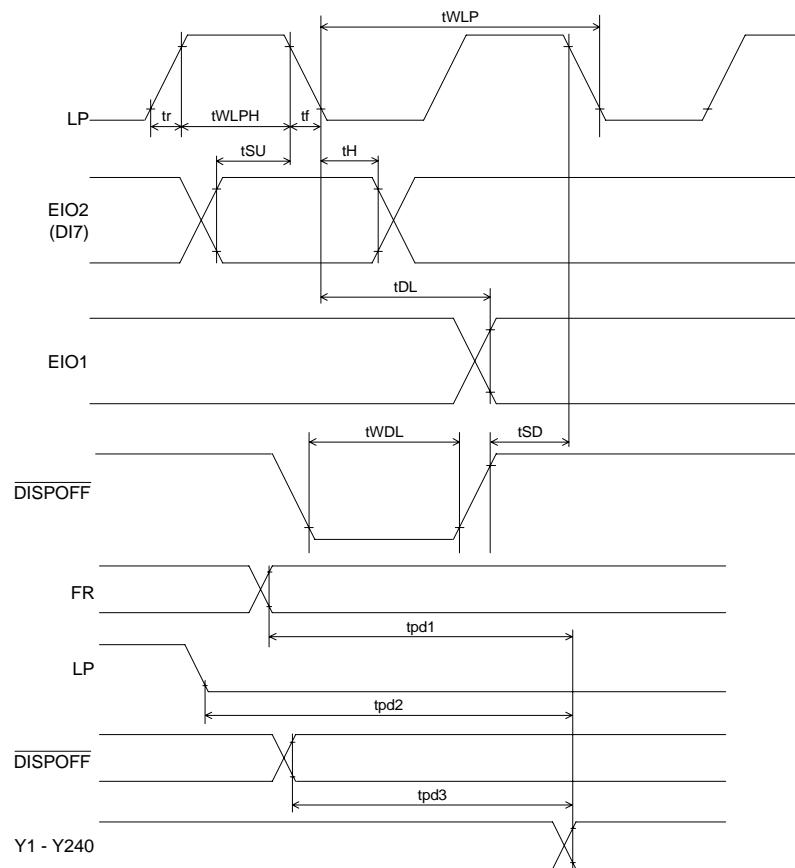


Application Circuit (for reference only)

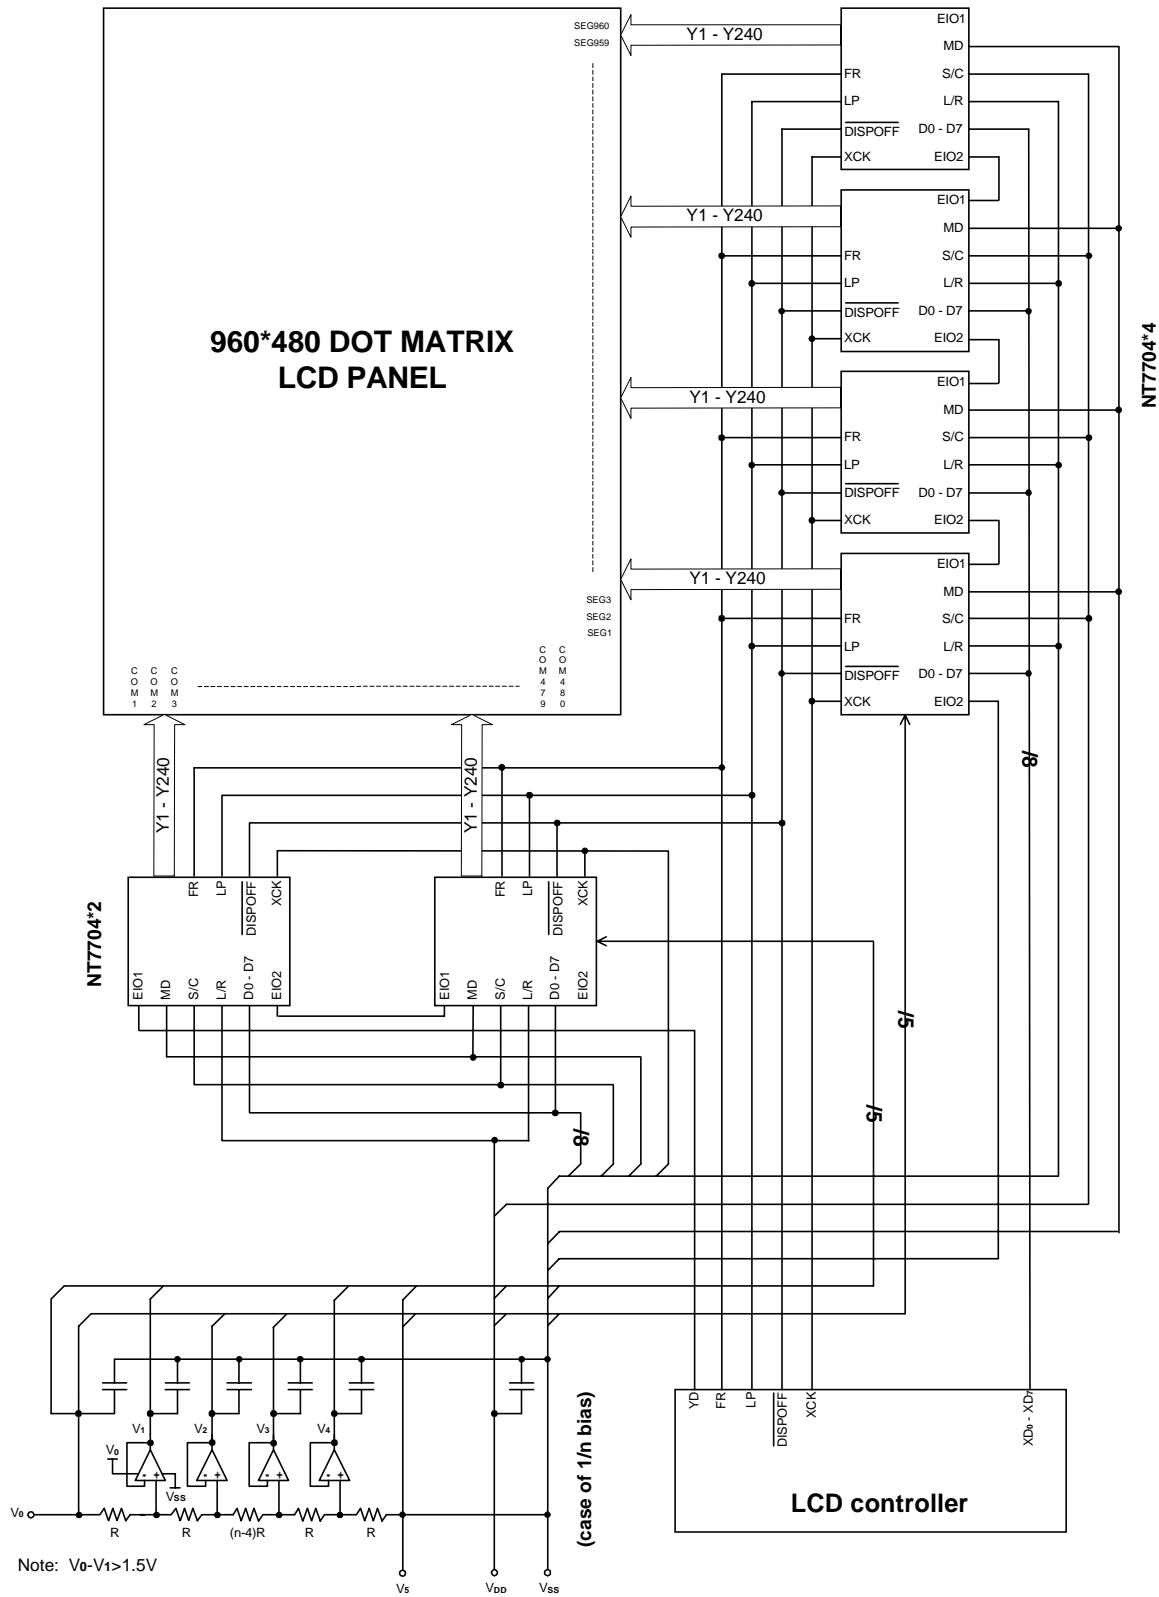

Note: $V_0 - V_1 > 1.5V$

Bonding Diagram

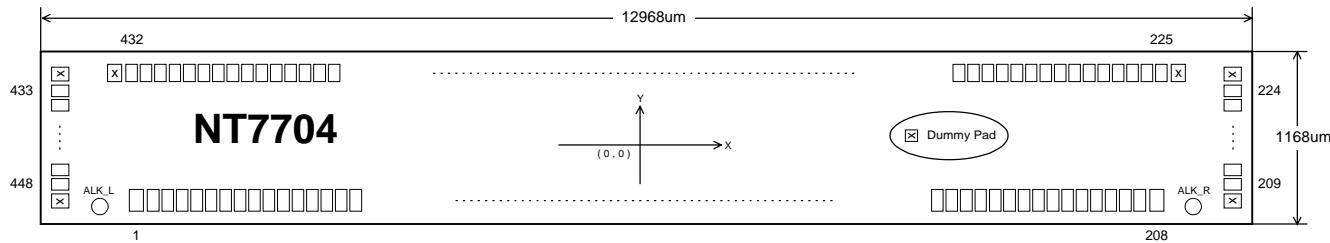

Pad Location

Pad No.	Designation	X	Y	Pad No.	Designation	X	Y
1	V _{0L}	-6220	-521	31	V _{5L}	-4410	-521
2	V _{0L}	-6150	-521	32	V _{5L}	-4350	-521
3	V _{0L}	-6090	-521	33	V _{5L}	-4290	-521
4	V _{0L}	-6030	-521	34	V _{5L}	-4230	-521
5	V _{0L}	-5970	-521	35	V _{5L}	-4170	-521
6	V _{0L}	-5910	-521	36	V _{5L}	-4110	-521
7	V _{0L}	-5850	-521	37	V _{5L}	-4050	-521
8	V _{0L}	-5790	-521	38	V _{5L}	-3990	-521
9	V _{0L}	-5730	-521	39	V _{5L}	-3930	-521
10	V _{0L}	-5670	-521	40	V _{5L}	-3870	-521
11	V _{0L}	-5610	-521	41	V _{ss}	-3810	-521
12	V _{0L}	-5550	-521	42	V _{ss}	-3750	-521
13	V _{12L}	-5490	-521	43	V _{ss}	-3690	-521
14	V _{12L}	-5430	-521	44	V _{ss}	-3630	-521
15	V _{12L}	-5370	-521	45	V _{ss}	-3570	-521
16	V _{12L}	-5310	-521	46	V _{ss}	-3510	-521
17	V _{12L}	-5250	-521	47	V _{ss}	-3450	-521
18	V _{12L}	-5190	-521	48	V _{ss}	-3390	-521
19	V _{12L}	-5130	-521	49	V _{ss}	-3330	-521
20	V _{12L}	-5070	-521	50	V _{ss}	-3270	-521
21	V _{43L}	-5010	-521	51	V _{ss}	-3210	-521
22	V _{43L}	-4950	-521	52	V _{ss}	-3150	-521
23	V _{43L}	-4890	-521	53	V _{ss}	-3090	-521
24	V _{43L}	-4830	-521	54	V _{ss}	-3030	-521
25	V _{43L}	-4770	-521	55	V _{ss}	-2970	-521
26	V _{43L}	-4710	-521	56	V _{ss}	-2910	-521
27	V _{43L}	-4650	-521	57	V _{ss}	-2850	-521
28	V _{43L}	-4590	-521	58	V _{ss}	-2790	-521
29	V _{5L}	-4530	-521	59	V _{ss}	-2730	-521
30	V _{5L}	-4470	-521	60	V _{ss}	-2670	-521

Pad Location (continued)

Pad No.	Designation	X	Y	Pad No.	Designation	X	Y
61	Vss	-2610	-521	101	D1	-210	-521
62	Vss	-2550	-521	102	D1	-150	-521
63	Vss	-2490	-521	103	D1	-90	-521
64	Vss	-2430	-521	104	D2	-30	-521
65	Vss	-2370	-521	105	D2	30	-521
66	Vss	-2310	-521	106	D2	90	-521
67	VDD	-2250	-521	107	D3	150	-521
68	VDD	-2190	-521	108	D3	210	-521
69	VDD	-2130	-521	109	D3	270	-521
70	VDD	-2070	-521	110	D4	330	-521
71	VDD	-2010	-521	111	D4	390	-521
72	VDD	-1950	-521	112	D4	450	-521
73	VDD	-1890	-521	113	D5	510	-521
74	VDD	-1830	-521	114	D5	570	-521
75	VDD	-1770	-521	115	D5	630	-521
76	VDD	-1710	-521	116	D6	690	-521
77	VDD	-1650	-521	117	D6	750	-521
78	VDD	-1590	-521	118	D6	810	-521
79	VDD	-1530	-521	119	D7	870	-521
80	VDD	-1470	-521	120	D7	930	-521
81	VDD	-1410	-521	121	D7	990	-521
82	VDD	-1350	-521	122	XCK	1050	-521
83	VDD	-1290	-521	123	XCK	1110	-521
84	VDD	-1230	-521	124	XCK	1170	-521
85	VDD	-1170	-521	125	DISPOFF	1230	-521
86	VDD	-1110	-521	126	DISPOFF	1290	-521
87	VDD	-1050	-521	127	DISPOFF	1350	-521
88	VDD	-990	-521	128	LP	1410	-521
89	VDD	-930	-521	129	LP	1470	-521
90	VDD	-870	-521	130	LP	1530	-521
91	VDD	-810	-521	131	EIO1	1590	-521
92	VDD	-750	-521	132	EIO1	1650	-521
93	S/C	-690	-521	133	EIO1	1710	-521
94	S/C	-630	-521	134	FR	1770	-521
95	EIO2	-570	-521	135	FR	1830	-521
96	EIO2	-510	-521	136	FR	1890	-521
97	EIO2	-450	-521	137	L/R	1950	-521
98	D0	-390	-521	139	L/R	2010	-521
99	D0	-330	-521	139	L/R	2070	-521
100	D0	-270	-521	140	MD	2130	-521

Pad Location (continued)

Pad No.	Designation	X	Y	Pad No.	Designation	X	Y
141	MD	2190	-521	181	V43R	4590	-521
142	MD	2250	-521	182	V43R	4650	-521
143	Vss	2310	-521	183	V43R	4710	-521
144	Vss	2370	-521	184	V43R	4770	-521
145	Vss	2430	-521	185	V43R	4830	-521
146	Vss	2490	-521	186	V43R	4890	-521
147	Vss	2550	-521	187	V43R	4950	-521
148	Vss	2610	-521	188	V43R	5010	-521
149	Vss	2670	-521	189	V12R	5070	-521
150	Vss	2730	-521	190	V12R	5130	-521
151	Vss	2790	-521	191	V12R	5190	-521
152	Vss	2850	-521	192	V12R	5250	-521
153	Vss	2910	-521	193	V12R	5310	-521
154	Vss	2970	-521	194	V12R	5370	-521
155	Vss	3030	-521	195	V12R	5430	-521
156	Vss	3090	-521	196	V12R	5490	-521
157	Vss	3150	-521	197	V0R	5550	-521
158	Vss	3210	-521	198	V0R	5610	-521
159	Vss	3270	-521	199	V0R	5670	-521
160	Vss	3330	-521	200	V0R	5730	-521
161	Vss	3390	-521	201	V0R	5790	-521
162	Vss	3450	-521	202	V0R	5850	-521
163	Vss	3510	-521	203	V0R	5910	-521
164	Vss	3570	-521	204	V0R	5970	-521
165	Vss	3630	-521	205	V0R	6030	-521
166	Vss	3690	-521	206	V0R	6090	-521
167	Vss	3750	-521	207	V0R	6150	-521
168	Vss	3810	-521	208	V0R	6220	-521
169	V5R	3870	-521	209	Y1	6430	-450
170	V5R	3930	-521	210	Y2	6430	-390
171	V5R	3990	-521	211	Y3	6430	-330
172	V5R	4050	-521	212	Y4	6430	-270
173	V5R	4110	-521	213	Y5	6430	-210
174	V5R	4170	-521	214	Y6	6430	-150
175	V5R	4230	-521	215	Y7	6430	-90
176	V5R	4290	-521	216	Y8	6430	-30
177	V5R	4350	-521	217	Y9	6430	30
178	V5R	4410	-521	218	Y10	6430	90
179	V5R	4470	-521	219	Y11	6430	150
180	V5R	4530	-521	220	Y12	6430	210

Pad Location (continued)

Pad No.	Designation	X	Y	Pad No.	Designation	X	Y
221	Y13	6430	270	261	Y53	4050	529
222	Y14	6430	330	262	Y54	3990	529
223	Y15	6430	390	263	Y55	3930	529
224	Y16	6430	450	264	Y56	3870	529
225	Y17	6210	529	265	Y57	3810	529
226	Y18	6150	529	266	Y58	3750	529
227	Y19	6090	529	267	Y59	3690	529
228	Y20	6030	529	268	Y60	3630	529
229	Y21	5970	529	269	Y61	3570	529
230	Y22	5910	529	270	Y62	3510	529
231	Y23	5850	529	271	Y63	3450	529
232	Y24	5790	529	272	Y64	3390	529
233	Y25	5730	529	273	Y65	3330	529
234	Y26	5670	529	274	Y66	3270	529
235	Y27	5610	529	275	Y67	3210	529
236	Y28	5550	529	276	Y68	3150	529
237	Y29	5490	529	277	Y69	3090	529
238	Y30	5430	529	278	Y70	3030	529
239	Y31	5370	529	279	Y71	2970	529
240	Y32	5310	529	280	Y72	2910	529
241	Y33	5250	529	281	Y73	2850	529
242	Y34	5190	529	282	Y74	2790	529
243	Y35	5130	529	283	Y75	2730	529
244	Y36	5070	529	284	Y76	2670	529
245	Y37	5010	529	285	Y77	2610	529
246	Y38	4950	529	286	Y78	2550	529
247	Y39	4890	529	287	Y79	2490	529
248	Y40	4830	529	288	Y80	2430	529
249	Y41	4770	529	289	Y81	2370	529
250	Y42	4710	529	290	Y82	2310	529
251	Y43	4650	529	291	Y83	2250	529
252	Y44	4590	529	292	Y84	2190	529
253	Y45	4530	529	293	Y85	2130	529
254	Y46	4470	529	294	Y86	2070	529
255	Y47	4410	529	295	Y87	2010	529
256	Y48	4350	529	296	Y88	1950	529
257	Y49	4290	529	297	Y89	1890	529
258	Y50	4230	529	298	Y90	1830	529
259	Y51	4170	529	299	Y91	1770	529
260	Y52	4110	529	300	Y92	1710	529

Pad Location (continued)


Pad No.	Designation	X	Y	Pad No.	Designation	X	Y
301	Y93	1650	529	341	Y133	-750	529
302	Y94	1590	529	342	Y134	-810	529
303	Y95	1530	529	343	Y135	-870	529
304	Y96	1470	529	344	Y136	-930	529
305	Y97	1410	529	345	Y137	-990	529
306	Y98	1350	529	346	Y138	-1050	529
307	Y99	1290	529	347	Y139	-1110	529
308	Y100	1230	529	348	Y140	-1170	529
309	Y101	1170	529	349	Y141	-1230	529
310	Y102	1110	529	350	Y142	-1290	529
311	Y103	1050	529	351	Y143	-1350	529
312	Y104	990	529	352	Y144	-1410	529
313	Y105	930	529	353	Y145	-1470	529
314	Y106	870	529	354	Y146	-1530	529
315	Y107	810	529	355	Y147	-1590	529
316	Y108	750	529	356	Y148	-1650	529
317	Y109	690	529	357	Y149	-1710	529
318	Y110	630	529	358	Y150	-1770	529
319	Y111	570	529	359	Y151	-1830	529
320	Y112	510	529	360	Y152	-1890	529
321	Y113	450	529	361	Y153	-1950	529
322	Y114	390	529	362	Y154	-2010	529
323	Y115	330	529	363	Y155	-2070	529
324	Y116	270	529	364	Y156	-2130	529
325	Y117	210	529	365	Y157	-2190	529
326	Y118	150	529	366	Y158	-2250	529
327	Y119	90	529	367	Y159	-2310	529
328	Y120	30	529	368	Y160	-2370	529
329	Y121	-30	529	369	Y161	-2430	529
330	Y122	-90	529	370	Y162	-2490	529
331	Y123	-150	529	371	Y163	-2550	529
332	Y124	-210	529	372	Y164	-2610	529
333	Y125	-270	529	373	Y165	-2670	529
334	Y126	-330	529	374	Y166	-2730	529
335	Y127	-390	529	375	Y167	-2790	529
336	Y128	-450	529	376	Y168	-2850	529
337	Y129	-510	529	377	Y169	-2910	529
338	Y130	-570	529	378	Y170	-2970	529
339	Y131	-630	529	379	Y171	-3030	529
340	Y132	-690	529	380	Y172	-3090	529

Pad Location (continued)

Pad No.	Designation	X	Y	Pad No.	Designation	X	Y
381	Y173	-3150	529	416	Y208	-5250	529
382	Y174	-3210	529	417	Y209	-5310	529
383	Y175	-3270	529	418	Y210	-5370	529
384	Y176	-3330	529	419	Y211	-5430	529
385	Y177	-3390	529	420	Y212	-5490	529
386	Y178	-3450	529	421	Y213	-5550	529
387	Y179	-3510	529	422	Y214	-5610	529
388	Y180	-3570	529	423	Y215	-5670	529
389	Y181	-3630	529	424	Y216	-5730	529
390	Y182	-3690	529	425	Y217	-5790	529
391	Y183	-3750	529	426	Y218	-5850	529
392	Y184	-3810	529	427	Y219	-5910	529
393	Y185	-3870	529	428	Y220	-5970	529
394	Y186	-3930	529	429	Y221	-6030	529
395	Y187	-3990	529	430	Y222	-6090	529
396	Y188	-4050	529	431	Y223	-6150	529
397	Y189	-4110	529	432	Y224	-6210	529
398	Y190	-4170	529	433	Y225	-6430	450
399	Y191	-4230	529	434	Y226	-6430	390
400	Y192	-4290	529	435	Y227	-6430	330
401	Y193	-4350	529	436	Y228	-6430	270
402	Y194	-4410	529	437	Y229	-6430	210
403	Y195	-4470	529	438	Y230	-6430	150
404	Y196	-4530	529	439	Y231	-6430	90
405	Y197	-4590	529	440	Y232	-6430	30
406	Y198	-4650	529	441	Y233	-6430	-30
407	Y199	-4710	529	442	Y234	-6430	-90
408	Y200	-4770	529	443	Y235	-6430	-150
409	Y201	-4830	529	444	Y236	-6430	-210
410	Y202	-4890	529	445	Y237	-6430	-270
411	Y203	-4950	529	446	Y238	-6430	-330
412	Y204	-5010	529	447	Y239	-6430	-390
413	Y205	-5070	529	448	Y240	-6430	-450
414	Y206	-5130	529		ALK_L	-6318	-533
415	Y207	-5190	529		ALK_R	6318	-533

Dummy Pad Location (Total: 6 pin)


NO.	X	Y	NO.	X	Y
1	6430	-520	4	-6280	529
2	6430	520	5	-6430	520
3	6280	529	6	-6430	-520

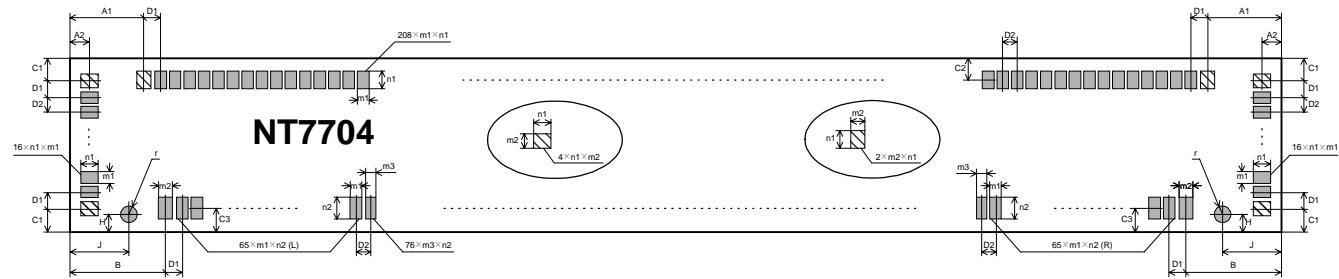Package Information

Chip Outline Dimensions

unit: um



Symbol	Dimensions in um	Symbol	Dimensions in um
A1	204	H	51
A2	54	J	166
B	264	m1	39
C1	64	m2	55
C2	55	m3	38
C3	63	n1	72
D1	70	n2	90
D2	60	r	35

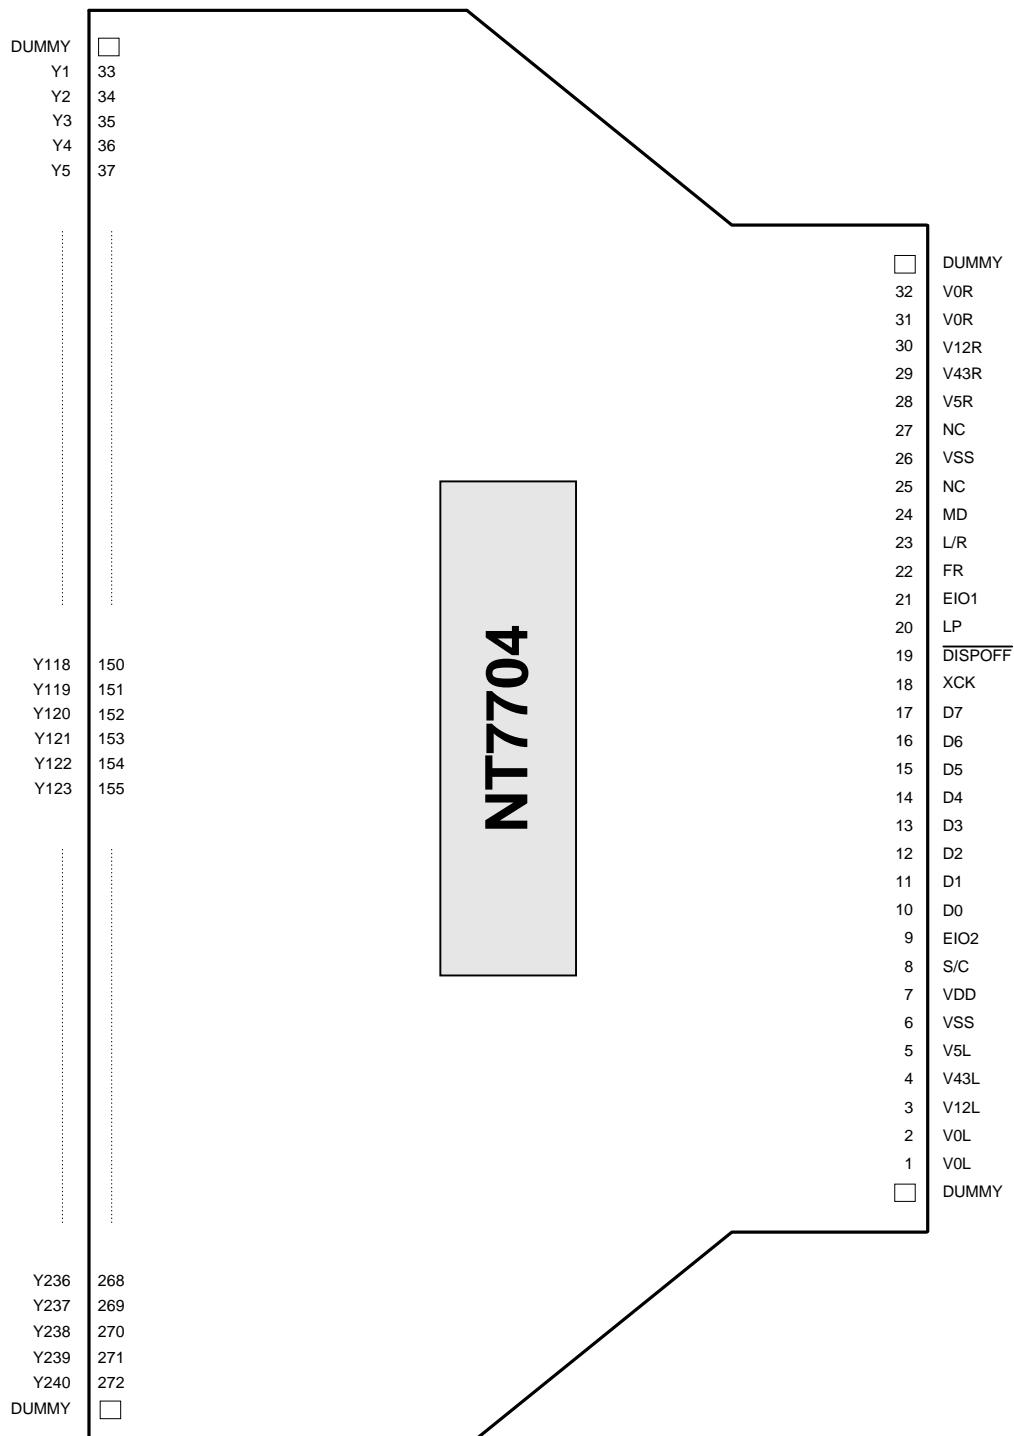TCP Pin Layout




(COPPER SIDE VIEW)

External View of TCP Pins

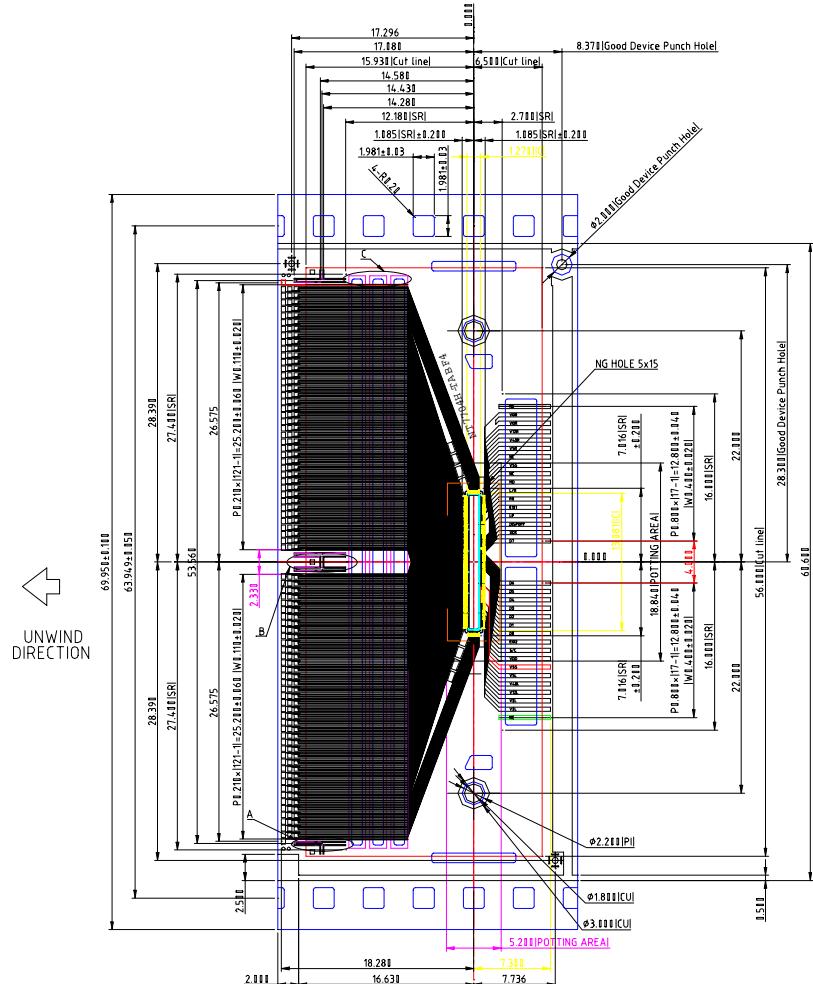


Detail of flex



FINISH VALUE

OUTPUT






Show the IC side

NOTE:

- 1.GENERAL TOLERANCE: $\pm 0.05\text{mm}$
2.ALL CHAMFER IS $R0.2\text{mm}$
3.MATERIAL
PI: UPILEX-S $75\pm6\mu\text{m}$ THICKNESS
ADHESIVE: TORAY #7100 $12\pm2\mu\text{m}$ THICKNESS
CU: FQ-VLP 25um
FLEX COATING: FS-100L
SOLDER RESIST :AE-70-M11 $2.0\pm15\mu\text{m}$
OTHER TOLERANCE IS $\pm 0.20\text{mm}$

4.PLATING
SN: $0.20\pm0.05\mu\text{m}$

5.6 SPROCKET HOLES [28.5mm] FOR 1 TAPESITE

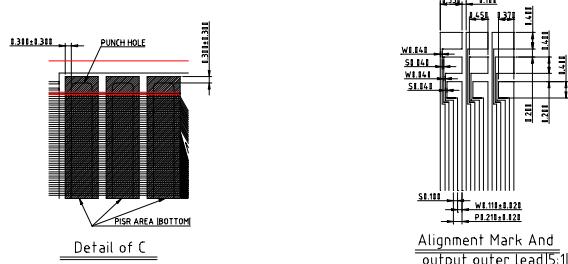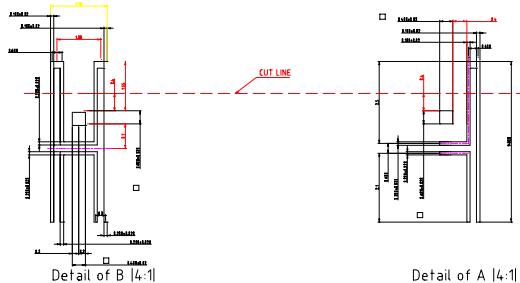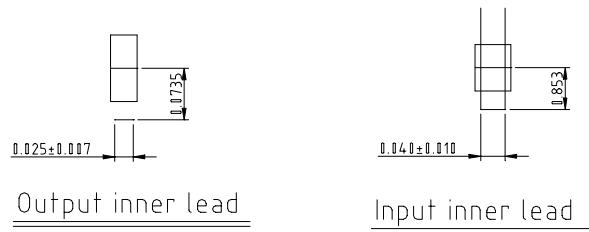


Cautions concerning storage:

- When storing the product, it is recommended that it be left in its shipping package.
After the seal of the packing bag has been broke, store the products in a nitrogen atmosphere.

- Storage conditions :

Storage state	Storage conditions
unopened (less than 90 days)	Temperature: 5 to 30°C; humidity: 80%RH or less
After seal of broken (less than 30 days)	Room temperature, dry nitrogen atmosphere

- Don't store in a location exposed to corrosive gas or excessive dust.
- Don't store in a location exposed to direct sunlight or subject to sharp changes in temperature.
- Don't store the product such that it is subjected to an excessive load weight, such as by stacking.
- Deterioration of the plating may occur after long-term storage, so special care is required.
It is recommended that the products be inspected before use.

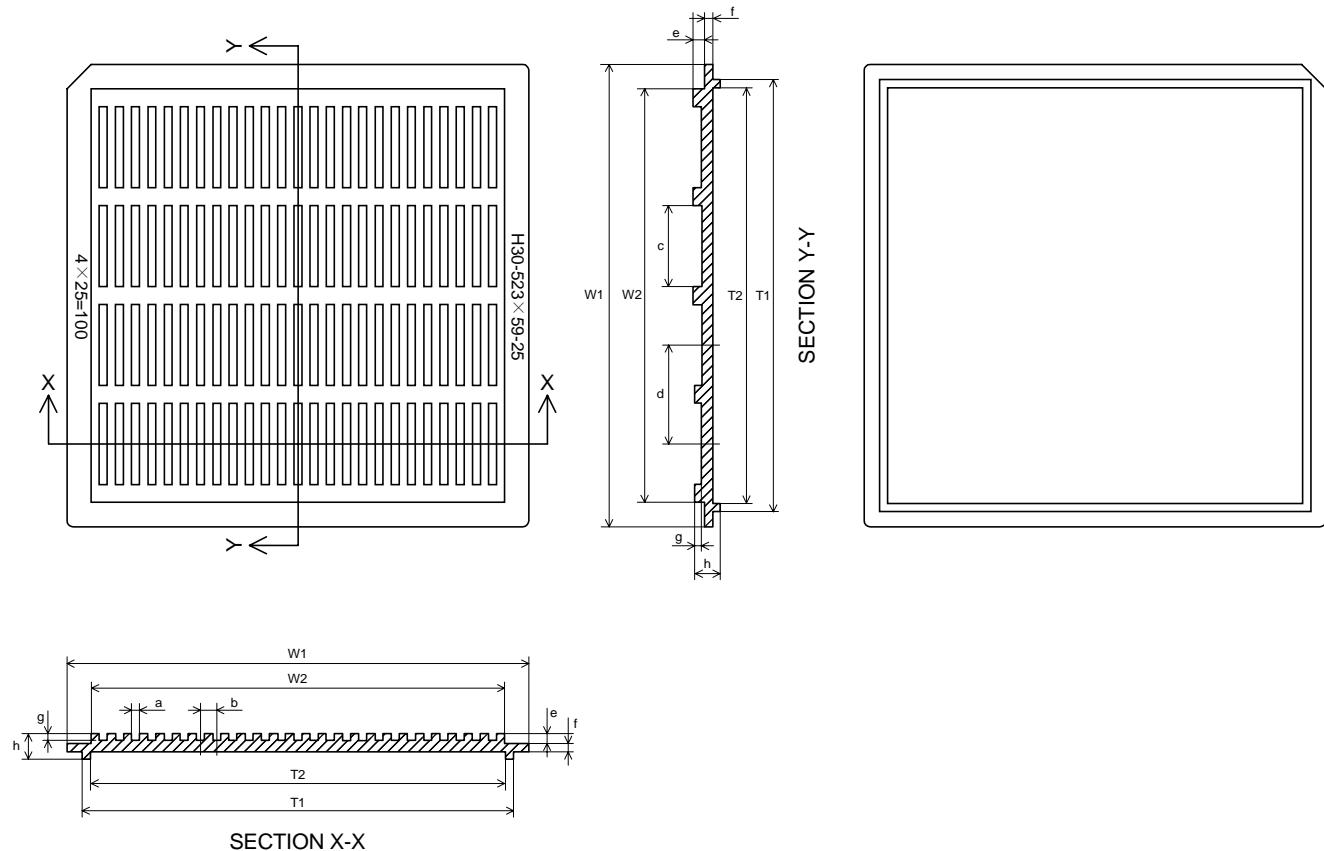Tray Information

Tray Outline Dimensions

unit: mm

Symbol	Dimensions in mm	Symbol	Dimensions in mm
a	1.30	g	0.64
b	2.67	h	4.20
c	13.30	W1	76.0
d	16.26	W2	68.0
e	1.60	T1	71.0
f	1.40	T2	68.3

Ordering Information

Part No.	Package
NT7704H-BDT	Au bump on chip tray
NT7704H-TABF4	TCP Form

Product Spec. Change Notice

NT7704 Specification Revision History		
Version	Content	Date
1.0	TCP and tray information addition (Page 36-39)	Dec. 2001
0.2	Gold Bump Size revision (Page 34) m1: 45 → 39, m2: 58 → 55	Sep. 2001
0.1	Pad Location Addition	Nov. 2000
0.0	Original	Nov. 2000