


SR320M thru SR360M

SURFACE MOUNT SCHOTTKY RECTIFIER

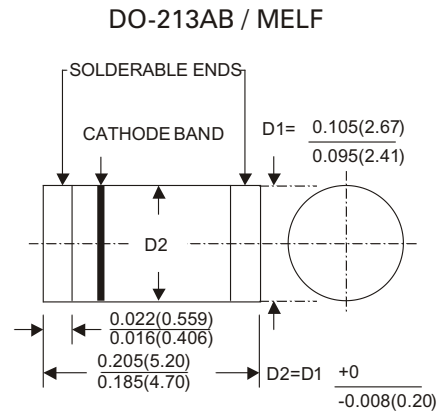

Dimension in inches (millimeters)

FEATURES

- Low power loss, high efficiency
- High current and surge capability
- Low forward voltage drop
- Guarding for over voltage protection
- High temperature soldering guaranteed :
250°C/10 seconds / 375° , (9.5mm) lead lengths

MECHANICAL DATA

Case : Molded plastic use UL94V-0 recognized flame retardant epoxy
 Terminals : Plated terminals
 Polarity : Blue Color band on body denotes cathode
 Mounting position : Any
 Weight : 0.1296grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temp. unless otherwise specified
 Single phase, half sine wave, 60Hz, resistive or inductive load
 For capacitive load, derate current by 20%

	SYMBOL	SR320M	SR330M	SR340M	SR350M	SR360M	UNITS
Maximum Current Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	Volts
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	Volts
Maximum Average Forward Rectified Current	$I_{(AV)}$	3.0					Amps
Peak Forward Surge Current Single Sine-Wave on Rated Load (JEDEC Method)	I_{FSM}	100					Amps
Maximum Instantaneous Forward Voltage Drop at 3.0A DC	V_F	0.5			0.75		Volts
Maximum DC Reverse Current $T_A=25^{\circ}C$ at Rated DC Blocking Voltage $T_A=100^{\circ}C$	I_R	0.5 20					mA
Typical Thermal Resistance	$R_{\theta JA}$ $R_{\theta JL}$	55 17					°C / W
Typical Junction Capacitance	C_J	500			250		pF
Operating Junction and Storage Temperature Range	T_J T_{STG}	-55 to +125 -55 to +150					°C

SR320M thru SR360M

SURFACE MOUNT SCHOTTKY RECTIFIER

RATING AND CHARACTERISTICS CURVES SR320M THRU SR360M

FIG. 1 - DERATING CURVE FOR OUTPUT RECTIFIER CURRENT

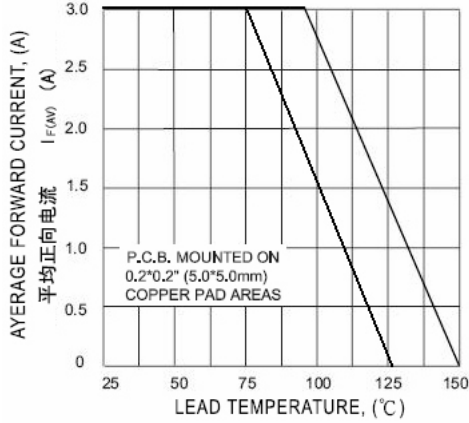


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

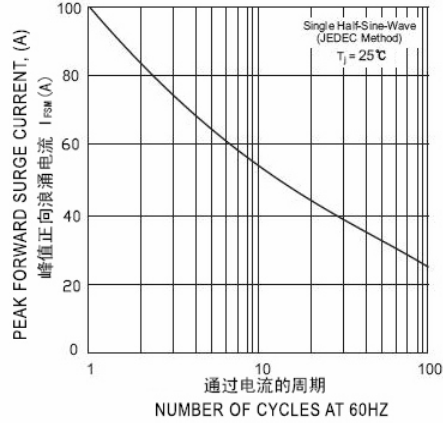


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

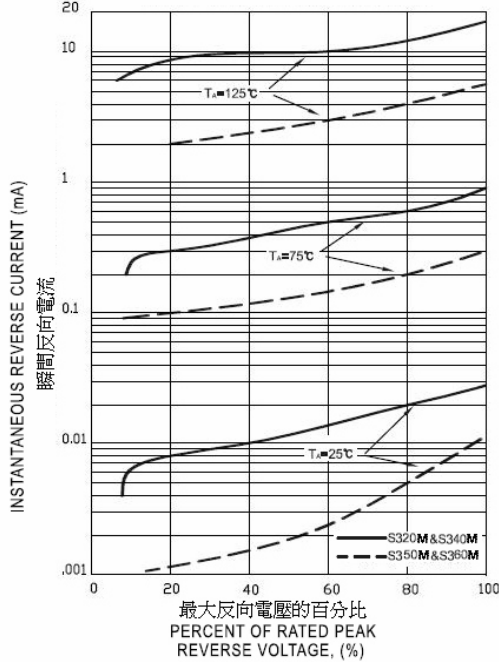


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

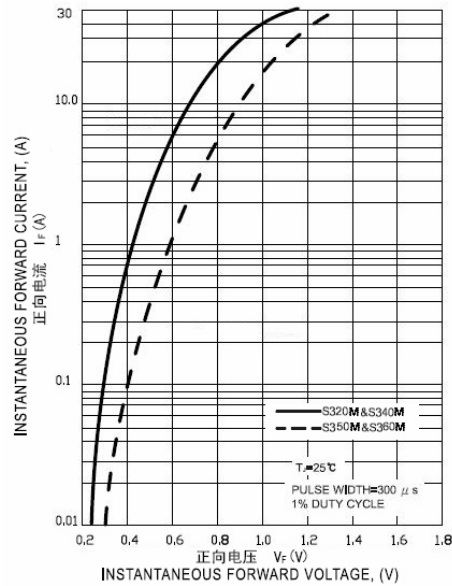


FIG. 5 - 表面電容(典型值)

FIG. 5 - TYPICAL JUNCTION CAPACITANCE

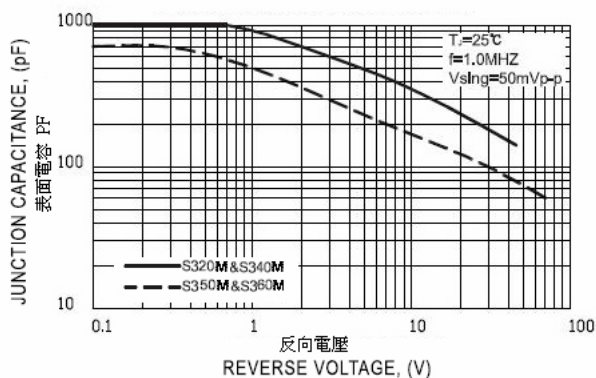


FIG. 6 - 瞬態熱阻(典型值)

FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

