

10/100BASE-TX Quad Port Surface Mount Magnetics



TEL: +86 755 29813112 FAX: +86 755 29813107
 Http://www.witchip.com E-mail:sales@witchip.com

Features

- Compliant with IEEE802.3u and ANSI X3.263
- IC grade transfer-molded package with stands 235°C peak temperature profile




SPEC

Electrical Specifications @25°C - Operating Temperature 0°C to 70°C

Part Number	Transmit Turns Ratio	Return Loss (dB MIN)				Crosstalk (dB TYP)				Common to Common Rejection Ratio 0.1~60MHz(dB TYP)		Differential to Common Mode Rejection (dB TYP)	
		Pri:Sec	2~30 MHz	40 MHz	50 MHz	60~80 MHz	1 MHz	30 MHz	60 MHz	100 MHz	Transmit	Receive	1~60 MHz
HF-84023	1.414:1	-18	-16	-14	-12	-65	-50	-40	-35	-35	-35	-40	-30

Mechanicals

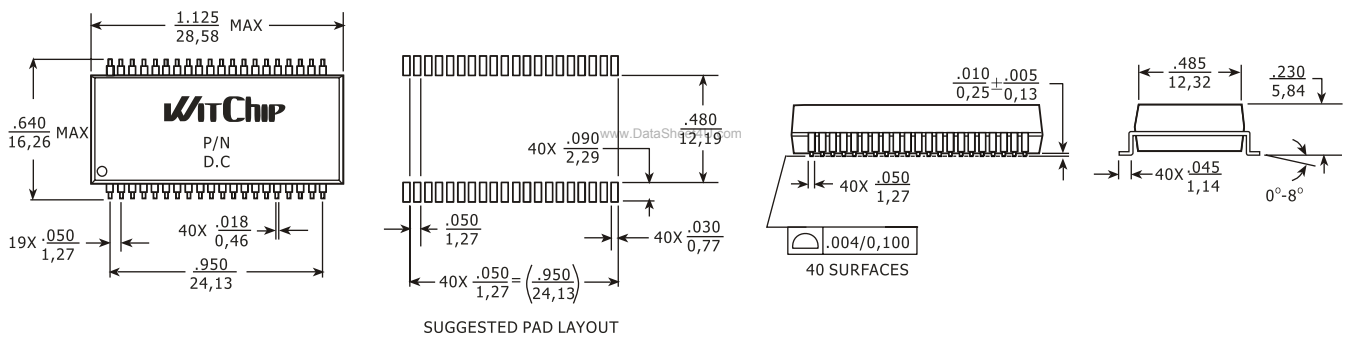

Dimensions: Inches
 mm
 Unless otherwise specified, all tolerances are ± .010 / 0,25

Schematics

