

3 TERMINAL 1A POSITIVE VOLTAGE REGULATORS



DESCRIPTION

The UTC78XX series of three-terminal positive regulators are available in TO-220 package and with several fixed output voltage, making them useful in a wide range of application. Each type employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltage and currents.

FEATURES

- *Output current up to 1A
- *5V;6V;8V;9V;10V;12V;15V;18V;24V output voltage available
- *Thermal overload protection
- *Short circuit protection
- *Output transistor SOA protection

BLOCK DIAGRAM

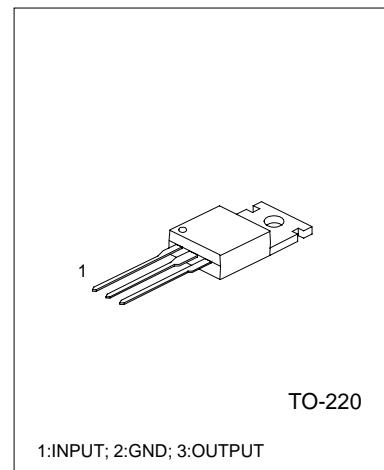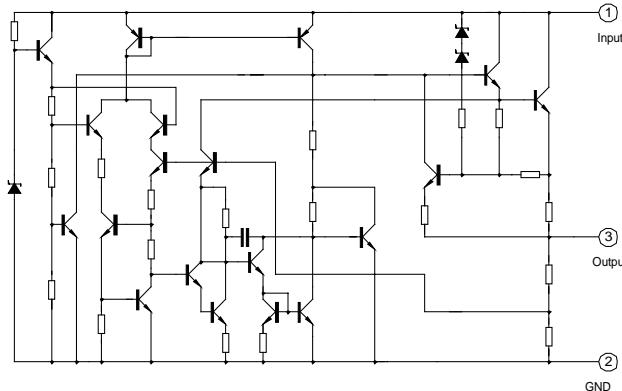

1:INPUT; 2:GND; 3:OUTPUT

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

Characteristic	Symbol	Value	Unit
Input voltage (for $V_o=5\text{V}$ to 18V) (for $V_o=24\text{V}$)	V_i	35 40	V V
Thermal resistance junction-air	$R_{\theta JA}$	65	$^\circ\text{C}/\text{W}$
Thermal resistance junction-cases	$R_{\theta JC}$	5	$^\circ\text{C}/\text{W}$
Operating Temperature	T_{opr}	0 ~ +125	$^\circ\text{C}$
Storage Temperature	T_{stg}	-65 ~ +150	$^\circ\text{C}$

UTC7805 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 10\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	$T_j=25^\circ\text{C}$	4.8	5.0	5.2	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 7\text{V}$ to 20V	4.75	5.00	5.25	V
Line regulation	ΔV_o	$T_j=25^\circ\text{C}, V_i = 7\text{V}$ to 25V		4.0	100	mV
		$T_j=25^\circ\text{C}, V_i = 8\text{V}$ to 12V		1.6	50	mV
Load regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.5A		9	100	mV
		$T_j=25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA		4	50	mV
Quiescent current	I_Q	$T_j=25^\circ\text{C}$		5.0	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A		0.03	0.5	mA
		$V_i = 7\text{V}$ to 25V		0.3	1.3	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-0.8		$\text{mV}/^\circ\text{C}$
Output noise voltage	V_N	$f = 10\text{Hz}$ to 100kHz , $T_a = 25^\circ\text{C}$		42		μV
Ripple rejection	RR	$f = 120\text{Hz}$, $V_i = 8\text{V}$ to 18V	62	73		dB
Dropout voltage	Vo	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		15		$\text{m}\Omega$
Short circuit current	I_{SC}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		230		mA
peak current	I_{PK}	$T_j = 25^\circ\text{C}$		2.2		A

UTC7806 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 11\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	$T_j=25^\circ\text{C}$	5.75	6.00	6.25	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 8\text{V}$ to 21V	5.7	6.0	6.3	V
Line regulation	ΔV_o	$T_j=25^\circ\text{C}, V_i = 8\text{V}$ to 25V		5	120	mV
		$T_j=25^\circ\text{C}, V_i = 9\text{V}$ to 13V		1.5	60	mV
Load regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.5A		9	130	mV
		$T_j=25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA		3	60	mV
Quiescent current	I_Q	$T_j=25^\circ\text{C}$		5.0	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 8\text{V}$ to 25V			1.3	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-0.8		$\text{mV}/^\circ\text{C}$
Output noise voltage	V_N	$f = 10\text{Hz}$ to 100kHz , $T_a = 25^\circ\text{C}$		45		μV
Ripple rejection	RR	$f = 120\text{Hz}$, $V_i = 9\text{V}$ to 19V	59	75		dB
Dropout voltage	Vo	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		19		$\text{m}\Omega$
Short circuit current	I_{SC}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		250		mA
peak current	I_{PK}	$T_j = 25^\circ\text{C}$		2.2		A

UTC7808 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 14\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V _o	T _j =25°C	7.7	8.0	8.3	V
		5.0mA < I _o < 1.0A, P _o < 15W V _i =10.5V to 23V	7.6	8.0	8.4	V
Line regulation	ΔV _o	T _j =25°C, V _i =10.5V to 25V		5.0	160	mV
		T _j =25°C, V _i =11.5V to 17V		2.0	80	mV
Load regulation	ΔV _o	T _j =25°C, I _o =5.0mA to 1.5A		10	160	mV
		T _j =25°C, I _o =250mA to 750mA		5.0	80	mV
Quiescent current	I _Q	T _j =25°C		5.0	8	mA
Quiescent current change	ΔI _Q	I _o =5mA to 1.0A		0.05	0.5	mA
		V _i =11.5V to 25V		0.5	1.0	mA
Output voltage drift	ΔV _o /ΔT	I _o =5mA		-0.8		mV/°C
Output noise voltage	V _N	f=10Hz to 100kHz, T _a =25°C		52		μV
Ripple rejection	RR	f=120Hz, V _i =11.5V to 21.5V	56	73		dB
Dropout voltage	V _o	I _o =1.0A, T _j =25°C		2		V
Output resistance	R _o	f=1kHz		17		mΩ
Short circuit current	I _{sc}	V _i =35V, T _a =25°C		230		mA
peak current	I _{pk}	T _j =25°C		2.2		A

UTC7809 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 15\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V _o	T _j =25°C	8.65	9.00	9.35	V
		5.0mA < I _o < 1.0A, P _o < 15W V _i =11.5V to 24V	8.6	9.0	9.4	V
Line regulation	ΔV _o	T _j =25°C, V _i =11.5V to 25V		6	180	mV
		T _j =25°C, V _i =12V to 25V		2	90	mV
Load regulation	ΔV _o	T _j =25°C, I _o =5.0mA to 1.5A		12	180	mV
		T _j =25°C, I _o =250mA to 750mA		4	90	mV
Quiescent current	I _Q	T _j =25°C		5.0	8	mA
Quiescent current change	ΔI _Q	I _o =5mA to 1.0A			0.5	mA
		V _i =11.5V to 26V			1.3	mA
Output voltage drift	ΔV _o /ΔT	I _o =5mA		-1		mV/°C
Output noise voltage	V _N	f=10Hz to 100kHz, T _a =25°C		58		μV
Ripple rejection	RR	f=120Hz, V _i =13V to 23V	56	71		dB
Dropout voltage	V _o	I _o =1.0A, T _j =25°C		2		V
Output resistance	R _o	f=1kHz		15		mΩ
Short circuit current	I _{sc}	V _i =35V, T _a =25°C		250		mA
peak current	I _{pk}	T _j =25°C		2.2		A

UTC7810 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 16\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	T _j =25°C	9.6	10	10.4	V
		5.0mA < I _o < 1.0A, P _o < 15W V _i =12.5V to 25V	9.5	10	10.5	V
Line regulation	ΔVo	T _j =25°C, V _i =12.5V to 25V		10	200	mV
		T _j =25°C, V _i =13V to 20V		3	100	mV
Load regulation	ΔVo	T _j =25°C, I _o =5.0mA to 1.5A		12	200	mV
		T _j =25°C, I _o =250mA to 750mA		4	100	mV
Quiescent current	I _Q	T _j =25°C		5.0	8	mA
Quiescent current change	ΔI _Q	I _o =5mA to 1.0A			0.5	mA
		V _i =12.5V to 29V			1.0	mA
Output voltage drift	ΔVo/ΔT	I _o =5mA		-1		mV/°C
Output noise voltage	V _N	f=10Hz to 100kHz, T _a =25°C		58		μV
Ripple rejection	RR	f=120Hz, V _i =14V to 24V	56	71		dB
Dropout voltage	Vo	I _o =1.0A, T _j =25°C		2		V
Output resistance	Ro	f=1kHz		17		mΩ
Short circuit current	I _{sc}	V _i =35V, T _a =25°C		250		mA
peak current	I _{pk}	T _j =25°C		2.2		A

UTC7812 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 16\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	T _j =25°C	11.5	12.0	12.5	V
		5.0mA < I _o < 1.0A, P _o < 15W V _i =14.5V to 27V	11.4	12	12.6	V
Line regulation	ΔVo	T _j =25°C, V _i =14.5V to 30V		10	240	mV
		T _j =25°C, V _i =16V to 22V		3	120	mV
Load regulation	ΔVo	T _j =25°C, I _o =5.0mA to 1.5A		11	240	mV
		T _j =25°C, I _o =250mA to 750mA		5.0	120	mV
Quiescent current	I _Q	T _j =25°C		5.1	8	mA
Quiescent current change	ΔI _Q	I _o =5mA to 1.0A			0.5	mA
		V _i =14.5V to 30V			1.0	mA
Output voltage drift	ΔVo/ΔT	I _o =5mA		-1		mV/°C
Output noise voltage	V _N	f=10Hz to 100kHz, T _a =25°C		76		μV
Ripple rejection	RR	f=120Hz, V _i =15V to 25V	55	71		dB
Dropout voltage	Vo	I _o =1.0A, T _j =25°C		2		V
Output resistance	Ro	f=1kHz		18		mΩ
Short circuit current	I _{sc}	V _i =35V, T _a =25°C		230		mA
peak current	I _{pk}	T _j =25°C		2.2		A

UTC7815 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 23\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	T _j =25°C	14.4	15.0	15.6	V
		5.0mA < I _o < 1.0A, P _o < 15W V _i =17.5V to 30V	14.25	15	15.75	V
Line regulation	ΔVo	T _j =25°C, V _i =17.5V to 30V		11	300	mV
		T _j =25°C, V _i =20V to 26V		3	150	mV
Load regulation	ΔVo	T _j =25°C, I _o =5.0mA to 1.5A		12	300	mV
		T _j =25°C, I _o =250mA to 750mA		4	150	mV
Quiescent current	I _Q	T _j =25°C		5.2	8	mA
Quiescent current change	ΔI _Q	I _o =5mA to 1.0A			0.5	mA
		V _i =17.5V to 305V			1.0	mA
Output voltage drift	ΔVo/ΔT	I _o =5mA		-1		mV/°C
Output noise voltage	V _N	f=10Hz to 100kHz, T _a =25°C		90		μV
Ripple rejection	RR	f=120Hz, V _i =18.5V to 28.5V	54	70		dB
Dropout voltage	Vo	I _o =1.0A, T _j =25°C		2		V
Output resistance	Ro	f=1kHz		19		mΩ
Short circuit current	I _{SC}	V _i =35V, T _a =25°C		250		mA
peak current	I _{pk}	T _j =25°C		2.2		A

UTC7818 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 23\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	T _j =25°C	17.3	18.0	18.7	V
		5.0mA < I _o < 1.0A, P _o < 15W V _i =21V to 33V	17.1	18	18.9	V
Line regulation	ΔVo	T _j =25°C, V _i =21V to 33V		15	360	mV
		T _j =25°C, V _i =24V to 30V		5	180	mV
Load regulation	ΔVo	T _j =25°C, I _o =5.0mA to 1.5A		15	360	mV
		T _j =25°C, I _o =250mA to 750mA		5.0	180	mV
Quiescent current	I _Q	T _j =25°C		5.2	8	mA
Quiescent current change	ΔI _Q	I _o =5mA to 1.0A			0.5	mA
		V _i =21V to 32V			1.0	mA
Output voltage drift	ΔVo/ΔT	I _o =5mA		-1		mV/°C
Output noise voltage	V _N	f=10Hz to 100kHz, T _a =25°C		110		μV
Ripple rejection	RR	f=120Hz, V _i =22V to 32V	53	69		dB
Dropout voltage	Vo	I _o =1.0A, T _j =25°C		2		V
Output resistance	Ro	f=1kHz		22		mΩ
Short circuit current	I _{SC}	V _i =35V, T _a =25°C		250		mA
peak current	I _{pk}	T _j =25°C		2.2		A

UTC7824 ELECTRICAL CHARACTERISTICS

(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 33\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j = 25^\circ\text{C}$	23	24	25	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 27\text{V}$ to 38V	22.8	24	25.2	V
Line regulation	ΔV_o	$T_j = 25^\circ\text{C}, V_i = 27\text{V}$ to 38V		17	480	mV
		$T_j = 25^\circ\text{C}, V_i = 30\text{V}$ to 36V		6	240	mV
Load regulation	ΔV_o	$T_j = 25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.5A		15	480	mV
		$T_j = 25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA		5.0	240	mV
Quiescent current	I_Q	$T_j = 25^\circ\text{C}$		5.2	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 27\text{V}$ to 38V			1.0	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-1.5		$\text{mV}/^\circ\text{C}$
Output noise voltage	V_N	$f = 10\text{Hz}$ to $100\text{kHz}, T_a = 25^\circ\text{C}$		160		μV
Ripple rejection	RR	$f = 120\text{Hz}, V_i = 28\text{V}$ to 38V	50	67		dB
Dropout voltage	V_o	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		28		$\text{m}\Omega$
Short circuit current	I_{SC}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		230		mA
peak current	I_{PK}	$T_j = 25^\circ\text{C}$		2.2		A

TEST CIRCUITS

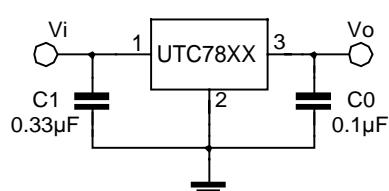


FIG.1 DC PARAMETERS

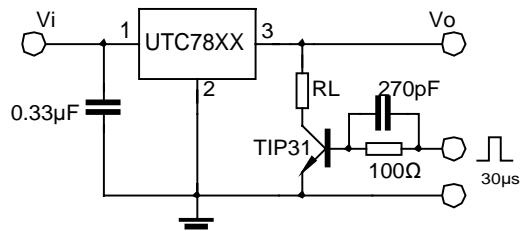


FIG.2 LOAD REGULATION

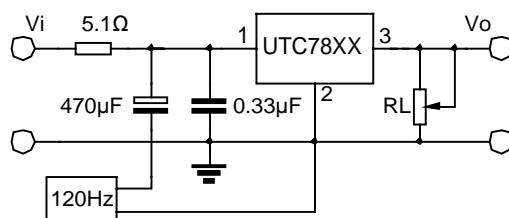


FIG.3 RIPPLE REJECTION

UTC78XX

LINEAR INTEGRATED CIRCUIT

APPLICATION CIRCUITS

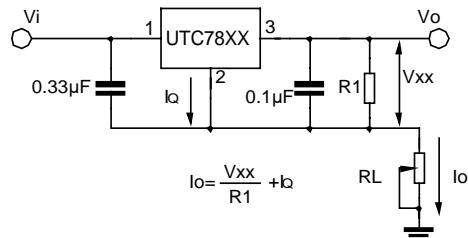
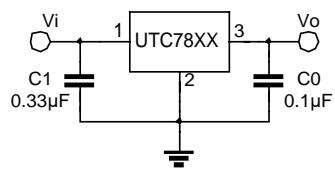


Fig.4 Fixed output regulator

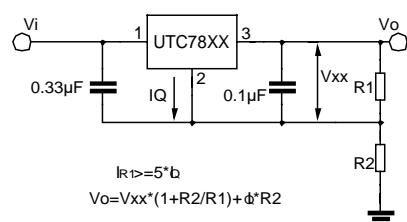


Fig.6 Circuit for increasing Regulator output voltage

Fig.5 Constant current regulator

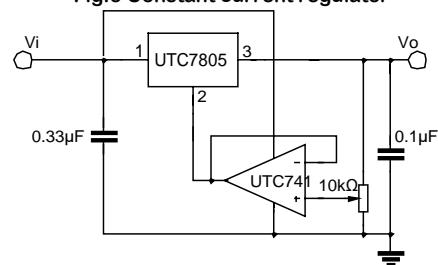


Fig.7 Adjustable output

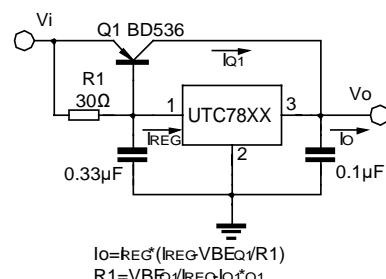


Fig.8 High current with voltage regulator

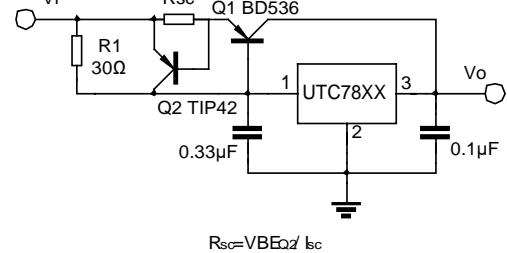


Fig.9 High output current short circuit protection

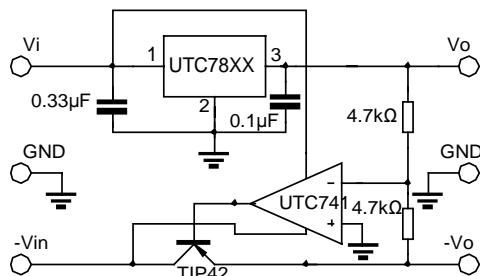


Fig.10 Tracking voltage regulator

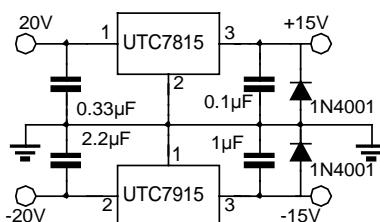


Fig.11 Split power supply(±15V,1A)

UTC78XX

LINEAR INTEGRATED CIRCUIT

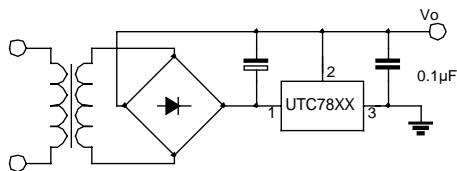


Fig.12 Negative output voltage circuit

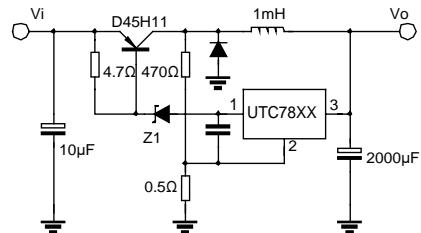


Fig.13 switching regulator

TYPICAL PERFORMANCE CHARACTERISTICS

Fig.14 Quiescent current

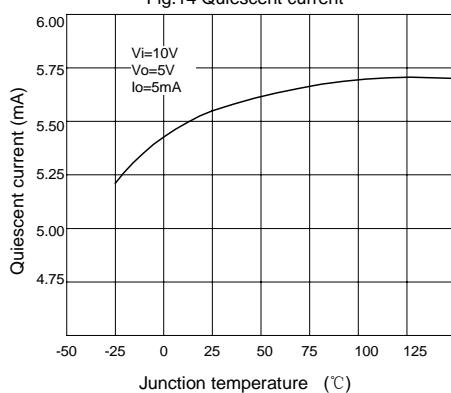


Fig.15 Output voltage

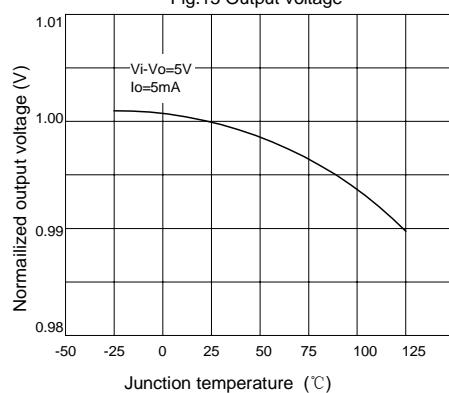


Fig.16 Peak output current

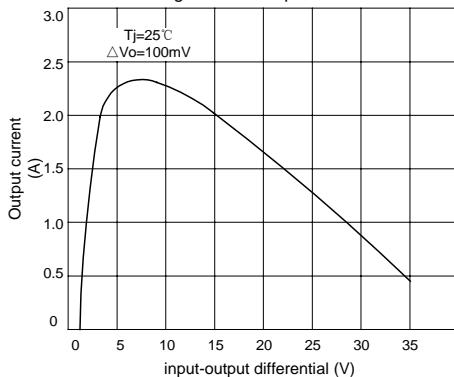


Fig.17 Quiescent current

