

1.06/1.25 Gbps 850 nm LC-TOSA

Product Description:

The LuxNet VG1A-9100 LC-TOSA (Transmitter Optical Subassembly) is designed for a high-speed, high-performance LC-TOSA data communication and telecommunication applications. This device is integrated with an 850nm VCSEL, TO header, and plastic port. The product is designed for 1.06/1.25 Gbps Fibre Channel, Gigabit Ethernet, ATM/SONET transceiver modules and systems. The LC type plastic port can be integrated with different types of ports that are engaged with a fiber connector to provide good coupling efficiency as light generated by the VCSEL is transmitted into multimode fiber.

Product Specifications:

Absolute Maximum Ratings

Parameter	Symbol	Unit	Min.	Max.	Note
Operating Temperature	T_{op}	°C	0	85	
Storage Temperature	T_{stg}	°C	- 40	85	
Solder Reflow Temperature				260	10 seconds max.
Forward Current (continuous)	I_{max}	mA		15	
Reverse Voltage	V_r	V		5	
Photodiode Forward Current	I_{pd}	mA		10	

Electro-Optical Characteristics (T = 25°C, unless noted otherwise):

Parameter	Symbol	Unit	Min.	Typ	Max.	Test Condition
Threshold Current	I_{th}	mA		3.0	5.0	
I_{th} Temperature Variation	ΔI_{th}	mA	-1.5		1.5	0°C to 85°C
Forward Voltage	V_f	V		2.0	2.2	10 mA
Reverse Voltage	V_r	V	5			-10 μ A
Differential Resistance	R_s	Ω		35	50	10 mA
Fiber coupled Slope Efficiency	η	mW/mA	0.03		0.15	10 mA, 50 μ m fiber
Slope Efficiency Temp-Coeff.	η_t	%/°K	-0.6			0°C to 85°C, 10 mA
Peak Wavelength	λ_p	nm	830	845	860	10 mA
Spectral Wavelength (RMS)	$\Delta\lambda$	nm		0.45	0.85	10 mA
λ_p Temp-Coeff.	$\Delta\lambda_p$	nm/°C		0.06		10 mA
Rise Time	τ_r	ps		150	250	20-80% $I_{bias} = 10mA$
Fall Time	τ_f	ps		150	250	20-80% $I_{bias} = 10mA$
Peak Fiber Coupled Optical Power	P_{oc}	μ W		400		10mA peak, 50/125 μ m fiber, NA=0.2
Rattle Sensitivity	RA_s	dB			0.5	


* Specifications are subject to change without notice.
* Screening per customer-specified reject limits is available.

Photodiode Characteristics (T = 25°C, unless noted otherwise):

Parameter	Symbol	Unit	Min.	Typ	Max	Test Condition
Monitor Current	I_{pd}	mA	0.1		0.58	$P_{oc} = 0.4 \text{ mW}$
Dark Current	I_d	nA			20	$P_{oc} = 0, V_r = 3V @ 25^\circ C$
PD Reverse Volt	BVR_{pd}	V	30	115		$P_o = 0, I_r = 10\mu A$
PD Capacitance	C	pF			100 55	$V_r = 0 @ 1\text{MHz}$ $V_r = 3V @ 1\text{MHz}$

Dimensions: (mm)

All dimensions are nominal

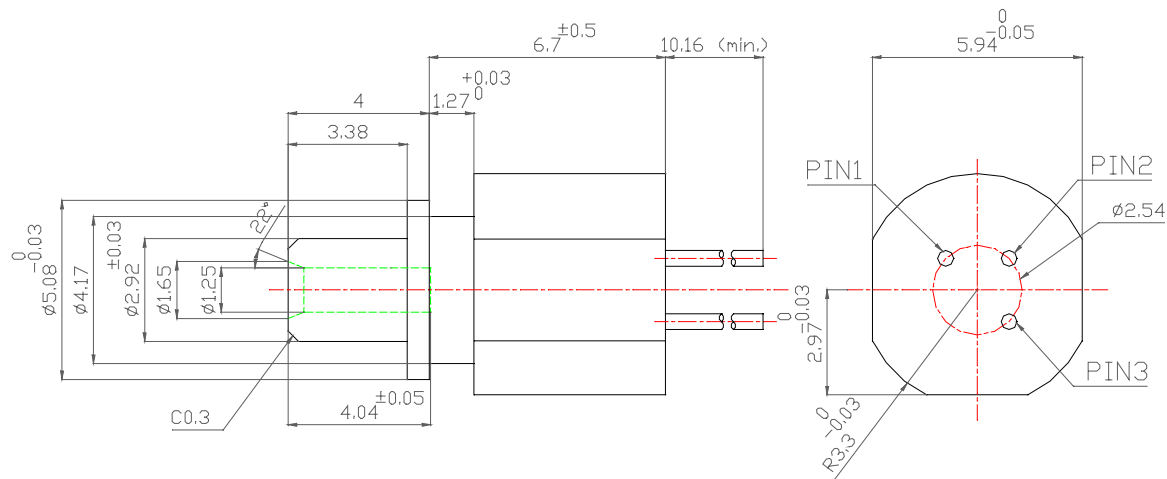

PINOUT

VG1A-9100 -1		VG1A-9100 -2	
Number	Function	Number	Function
1	VCSEL Anode	1	VCSEL Cathode
2	VCSEL Cathode & Photodiode Anode	2	VCSEL Anode & Photodiode Cathode
3	Photodiode Cathode	3	Photodiode Anode

* Specifications are subject to change without notice.
* Screening per customer-specified reject limits is available.