


## BOARD TO WIRE CONNECTORS

## SINGLE & DOUBLE ROW 2.54mm

- 2 - 40 way Single Row, 4 - 80 way Dual Row
- Current rating 3A, AC, DC
- Voltage rating 250V AC, 350V DC
- Accepts wire of 22 - 28 AWG

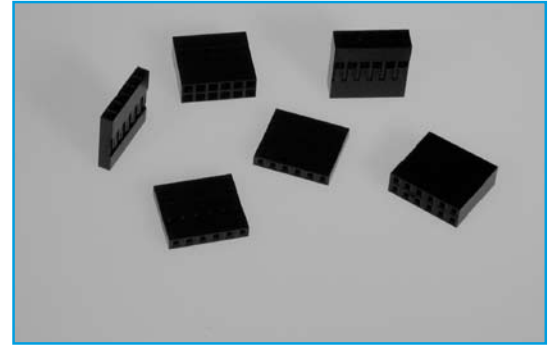

### SPECIFICATION

#### General

**Withstand Voltage:** 1000v AC/min  
**Insulation Resistance:** 1000MΩ min  
**Temperature Range:** -25° C to +85° C  
**Contact Resistance:** Initial Value/ 10mΩ max  
 After Environmental Testing  
 20mΩ max.

#### Housing


**Material:** Noryl SE100  
 SE100H 94V-1

#### Terminal

**Wire Acceptance:** 22-28 AWG  
**Material:** Brass  
**Finish:** Gold Plated/ Gold Flash  
**Thickness:** 0.2mm

### OUTLINE DRAWING

DBCCH2.54PIN

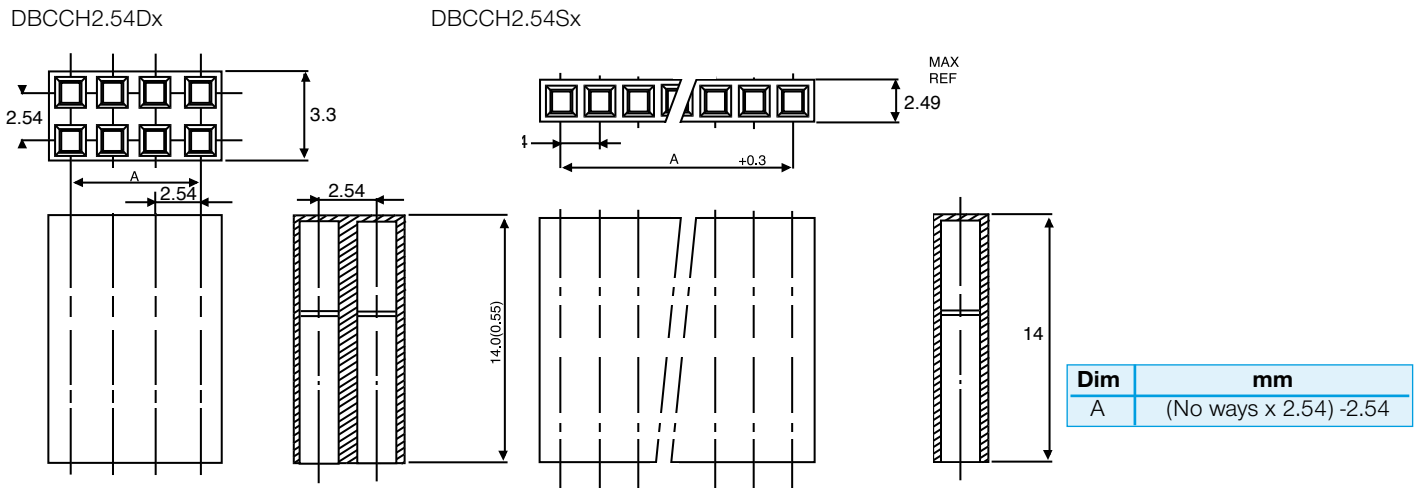

### ORDERING INFORMATION

DBC	CH	2.54	D	10
Dubilier Connectors	Series	Pitch	N° of Rows	N° of Ways
		2.54 = 2.54mm pitch	S = Single D = Dual	2 = 2ways 10 = 10ways etc

DBC	CH	2.54	PIN
Dubilier Connectors	Series	Pitch	Pin
		2.54 = 2.54mm pitch	