

HFS27(DC type)**SOLID STATE RELAY**

File No.:E134481



File No.:R50087694

**Features**

- Bipolar transistor output
- Photo isolation
- 2500V dielectric strength
- Single in-line PCB package
- RoHS compliant

INPUT (TA = 25°C)

	05D	5VDC
Rated input voltage	12D	12VDC
	24D	24VDC
	05D	4 to 6VDC
Control voltage range	12D	9.6 to 14.4VDC
	24D	19.2 to 28.8VDC
	05D	4VDC
Must operate voltage	12D	9.6VDC
	24D	19.2VDC
Must release voltage		1VDC
	05D	20mA
Input current	12D	20mA
	24D	16mA
	05D	300Ω
Input resistance	12D	800Ω
	24D	2000Ω

GENERAL (TA = 25°C)

Dielectric strength (input to output)	2500VAC, 50/60Hz, 1min
Insulation resistance (input to output)	1000MΩ (at 500VDC)
Max. capacitance (input to output)	8pF
Shock resistance	Acceleration: 1000m/s ² , continuous surge: 11ms
Vibration resistance	10 to 55Hz 1.5 mm DA
Ambient humidity	45% to 85% RH
Operating temperature	-30°C to 85°C
Storage temperature	-30°C to 100°C
Unit weight	Approx. 20g
Recommended soldering temperature	260°C, 10s or 350°C, 5s

DESCRIPTION

HFS27 is a SPST-NO printed circuit mount SIP, DC output SSR. The HFS27 DC SSR range offers a choice of 50VDC, 100VDC and 24VDC. Thanks to excellent structure designing, it has 2A load current under poor ventilation.

OUTPUT (TA = 25°C)

Type	<input type="checkbox"/> D-50D2T	<input type="checkbox"/> D-100D2T
Rated load voltage	4 to 50VDC	4 to 100VDC
Load voltage range	3 to 60VDC	3 to 100VDC
Max. transient overvoltage	66Vpk	110Vpk
Load current		0.1 to 2A
Max. surge current (10ms)		8Apk
Max. output on voltage drop		1.5Vrms
Max. output on leakage current		0.1mA
Max. turn-on time		0.5ms
Max. turn-off time		1ms



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.00

ORDERING INFORMATION


Type	HFS27 /	05D	50D	2	T	(XXX)
Input voltage	05D: 4 to 6VDC 24D: 19.2 to 28.8VDC	12D: 9.6 to 14.4VDC				
Load voltage	50D: 3 to 60VDC	100D: 3 to 100VDC				
Load current	2: 0.1 to 2A					
Output component		T: Transistor output				
Customer special code		Only for special requirements, e.g. (555) stands for RoHS compliant				

Notes: HFS27 is an environmental friendly product, please mark special code (555) when order.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


Outline Dimensions

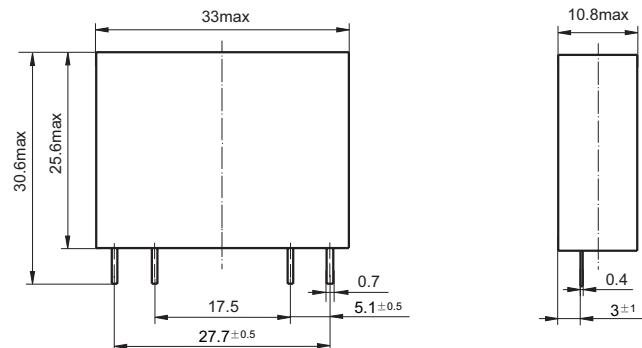

PCB Layout (Bottom view)

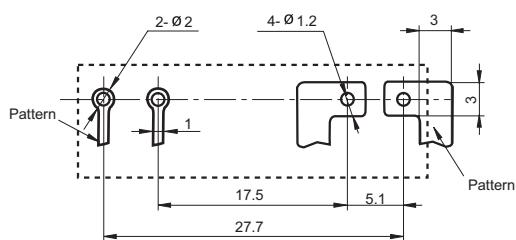


Wiring Diagram (Bottom view)

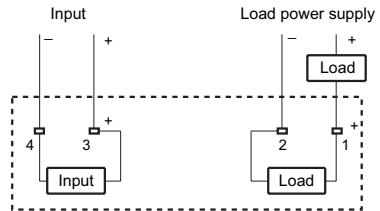


CHARACTERISTIC CURVES

Max. Load Current vs. Ambient Temp. (2A)

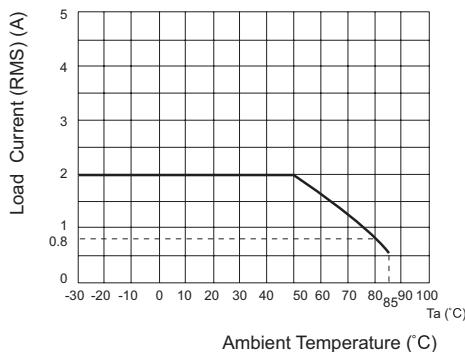

Max. Permissible Non-repetitive Peak Surge Current vs. Continuance Time

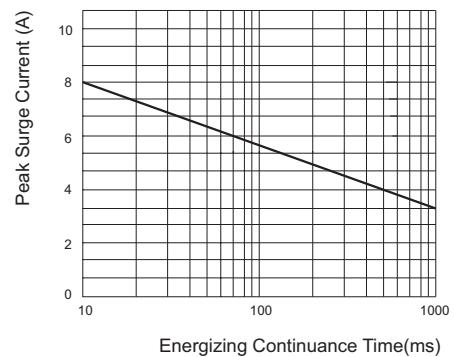

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.