



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDM-200-006

REV: 1.3

2.0" 5*7 Dot Matrix Displays

MODEL NO : ELM-2001EWA

ECN :

Page: 1/5

■ Features :

- Large emitting dot 0.2" diameter.
- Low power/high brightness.

■ Applications:

- Instrument panels
- Digital read out display

■ Descriptions :

- The ELM-2001 series is a large emitting area(5.0mm diameter)LED sources configured in a 35 dots 5*7 matrix array.
- These devices are made with white dots and gray surface.

PART NO	Chip		C.C. or C.A.
	Material	Emitted Color	
ELM-2001EWA	GaAsP/GaP	Orange	C.C.

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>




EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDM-200-006 REV: 1.3



2.0" 5*7 Dot Matrix Displays

MODEL NO : ELM-2001EWA ECN : _____ Page: 2/5

Package Dimensions:

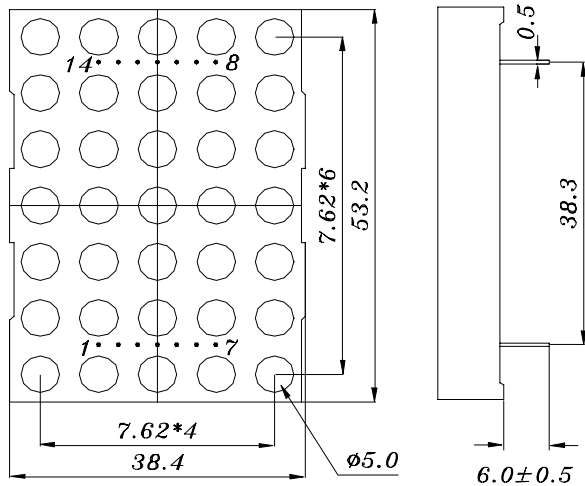

- CATHODE COLUMN
ANODE ROW
- 1 ANODE ROW 5
 - 2 ANODE ROW 7
 - 3 CATHODE COLUMN 2
 - 4 CATHODE COLUMN 3
 - 5 ANODE ROW 4
 - 6 CATHODE COLUMN 5
 - 7 ANODE ROW 6
 - 8 ANODE ROW 3
 - 9 ANODE ROW 1
 - 10 CATHODE COLUMN 4
 - 11 CATHODE COLUMN 3
 - 12 ANODE ROW 4
 - 13 CATHODE COLUMN 1
 - 14 ANODE ROW 2

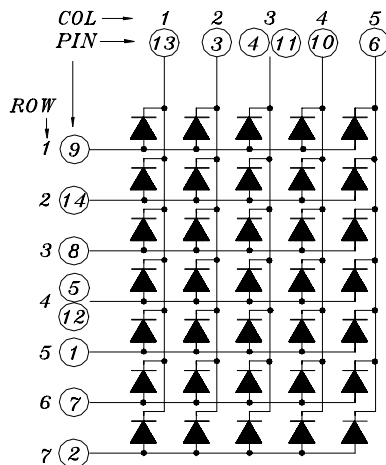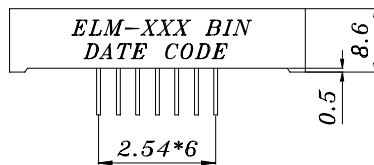

Notes:

1. All dimensions are in millimeters, tolerance is 0.25mm unless otherwise noted.
 2. Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification.



2.0" 5*7 Dot Matrix Displays

■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	30	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	100	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA

■ Electronic optical characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Iv	2.8	4.5	----	mcd	If=10mA
Peak Wavelength	λ p	----	635	----	nm	If=20mA
Dominant Wavelength	λ d	----	625	----	nm	If=20mA
Spectrum Radiation Bandwidth	Δ λ	----	45	----	nm	If=20mA
Forward Voltage	Vf	1.7	2.0	2.4	V	If=20mA
Reverse Current	Ir	----	----	10	μ A	Vr=5V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDM-200-006 REV: 1.3

2.0" 5*7 Dot Matrix Displays

MODEL NO : ELM-2001EWA ECN : Page: 4/5

Reliability test items and conditions:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 10 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1



Device Number : DDM-200-006 REV: 1.3

2.0" 5*7 Dot Matrix Displays

MODEL NO: ELM-2001EWA ECN : Page: 5/5

