

Single N-channel MOSFET

ELM13422CA-S

www.DataSheet4U.com

■ General description

ELM13422CA-S uses advanced trench technology to provide excellent $R_{ds(on)}$, low gate charge and low gate resistance.

■ Features

- $V_{ds}=55V$
- $I_d=2.1A$ ($V_{gs}=4.5V$)
- $R_{ds(on)} < 160m\Omega$ ($V_{gs}=4.5V$)
- $R_{ds(on)} < 200m\Omega$ ($V_{gs}=2.5V$)

■ Maximum absolute ratings

Parameter	Symbol	Limit	Unit	Note
Drain-source voltage	V_{ds}	55	V	
Gate-source voltage	V_{gs}	± 12	V	
Continuous drain current	I_d	2.1	A	1
		1.7		
Pulsed drain current	I_{dm}	10	A	2
Power dissipation	P_d	1.25	W	
		0.8		
Junction and storage temperature range	T_j, T_{stg}	-55 to 150	°C	

■ Thermal characteristics


Parameter		Symbol	Typ.	Max.	Unit	Note
Maximum junction-to-ambient	$t \leq 10s$	$R_{\theta ja}$	75	100	°C/W	1
Maximum junction-to-ambient	Steady-state		115	150	°C/W	
Maximum junction-to-lead	Steady-state	$R_{\theta jl}$	48	60	°C/W	3

www.DataSheet4U.com


■ Pin configuration

■ Circuit

SOT-23 (TOP VIEW)




(Without extra bar)



(With extra bar)

Pin No.	Pin name
1	GATE
2	SOURCE
3	DRAIN



■ Electrical characteristics

Ta=25°C







Parameter	Symbol	Condition		Min.	Typ.	Max.	Unit
STATIC PARAMETERS							
Drain-source breakdown voltage	BVdss	Id=10mA, Vgs=0V		55			V
Zero gate voltage drain current	Idss	Vds=44V			1		μA
		Vgs=0V	Tj=55°C			5	
Gate-body leakage current	Igss	Vds=0V, Vgs=±12V				±100	nA
Gate threshold voltage	Vgs(th)	Vds=Vgs, Id=250 μA		0.6	1.3	2.0	V
On state drain current	Id(on)	Vgs=4.5V, Vds=5V		10			A
Static drain-source on-resistance	Rds(on)	Vgs=4.5V			125	160	mΩ
		Id=2.1A	Tj=125°C		175	210	
		Vgs=2.5V, Id=1.5A			157	200	
Forward transconductance	Gfs	Vds=5V, Id=2.1A			11		S
Diode forward voltage	Vsd	Is=1A			0.78	1.00	V
Max. body-diode continuous current	Is					1	A
DYNAMIC PARAMETERS							
Input capacitance	Ciss	Vgs=0V, Vds=25V, f=1MHz			214.0	300.0	pF
Output capacitance	Coss				31.0		pF
Reverse transfer capacitance	Crss				12.6		pF
Gate resistance	Rg	Vgs=0V, Vds=0V, f=1MHz			1.3	3.0	Ω
SWITCHING PARAMETERS							
Total gate charge	Qg	Vgs=4.5V, Vds=27.5V, Id=2.1A			2.6	3.3	nC
Gate-source charge	Qgs				0.6		nC
Gate-drain charge	Qgd				0.8		nC
Turn-on delay time	td(on)	Vgs=10V, Vds=27.5V RL=12 Ω, Rgen=3 Ω			2.3		ns
Turn-on rise time	tr				2.4		ns
Turn-off delay time	td(off)				16.5		ns
Turn-off fall time	tf				2.0		ns
Body diode reverse recovery time	trr	If=2.1A, dl/dt=100A/μs			20	30	ns
Body diode reverse recovery charge	Qrr	If=2.1A, dl/dt=100A/μs			17		nC





www.DataSheet4U.com

NOTE :

- The value of R_{θja} is measured with the device mounted on 1in² FR-4 board of 2oz. Copper, in still air environment with Ta=25°C. The value in any given applications depends on the user's specific board design, The current rating is based on the t ≤ 10s thermal resistance rating.
- Repetitive rating, pulse width limited by junction temperature.
- The R_{θja} is the sum of the thermal impedance from junction to lead R_{θjl} and lead to ambient.
- The static characteristics in Figures 1 to 6 are obtained using 80μs pulses, duty cycle 0.5%max.
- These tests are performed with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with Ta=25°C. The SOA curve provides a single pulse rating.

■ Typical electrical and thermal characteristics

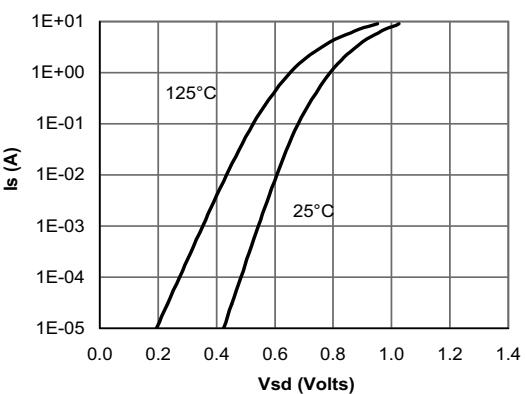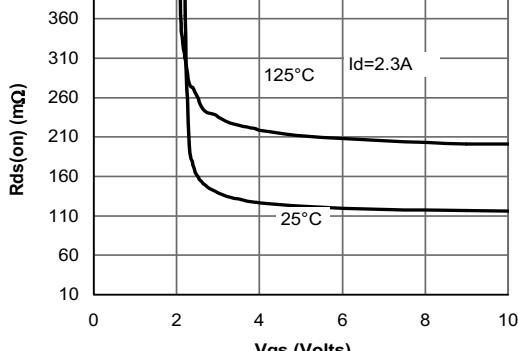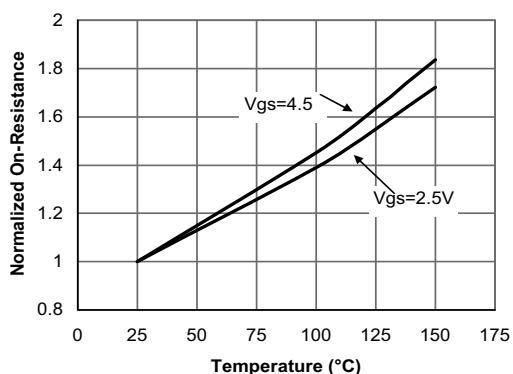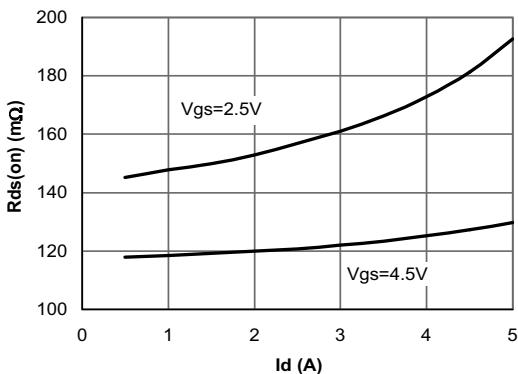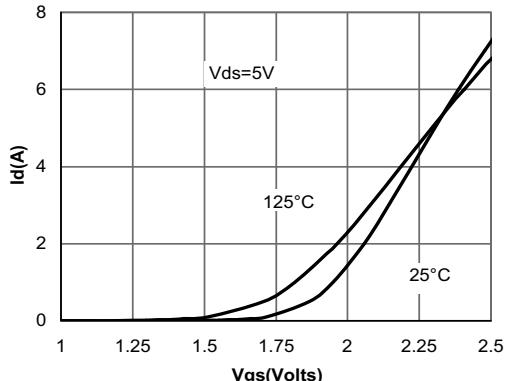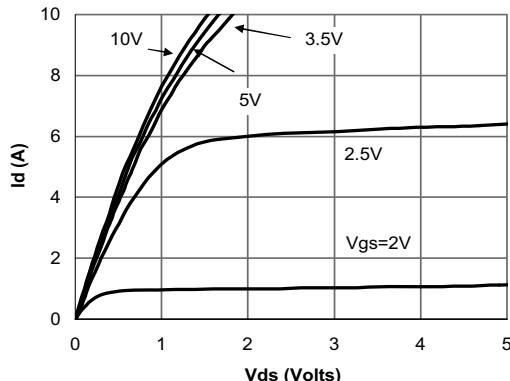

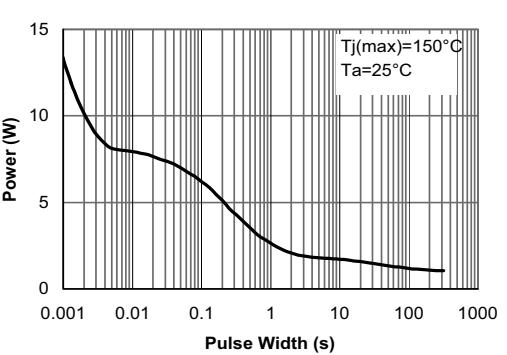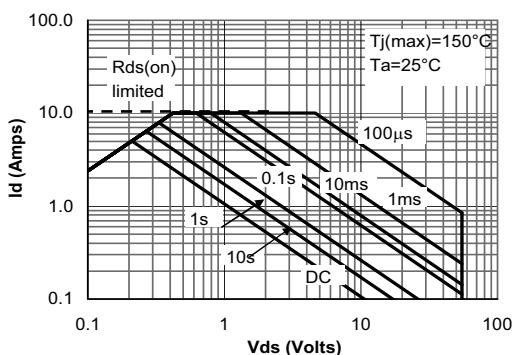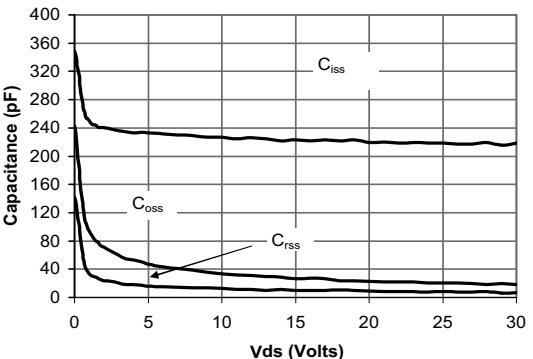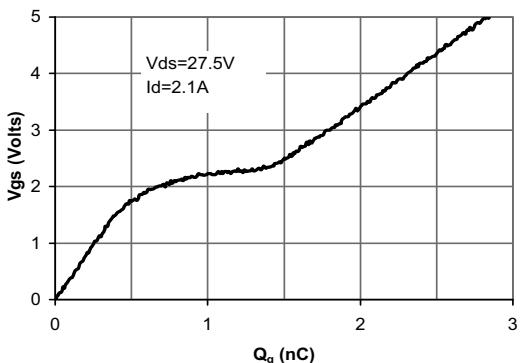

www.DataSheet4U.com

