



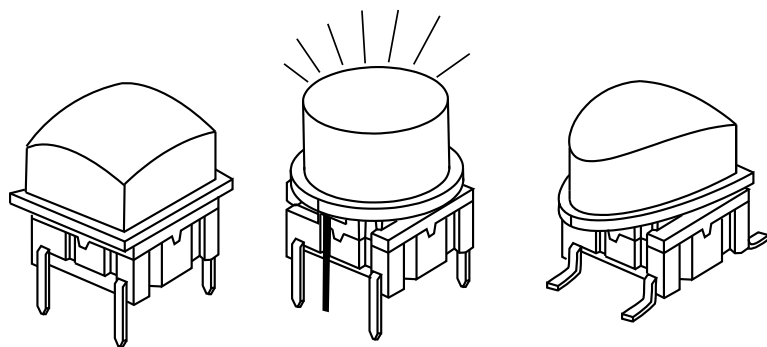


Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
low temp: -40/+65°C
high temp: -40/+160°C


Dimensions (through-hole)

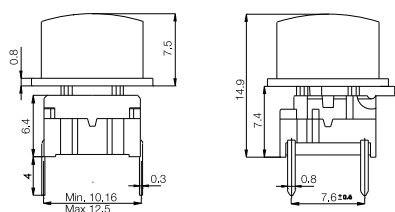


PCB layout

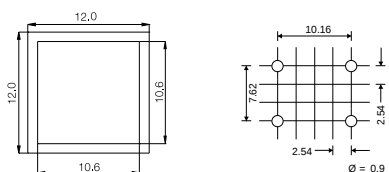


Dimensions (w/LED)

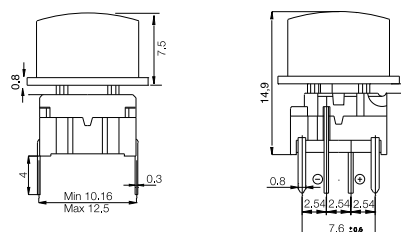


PCB layout
(top view)

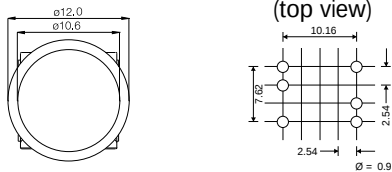

Dimensions (SMD)

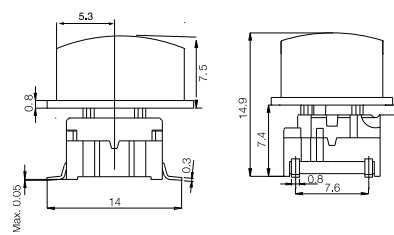

PCB layout

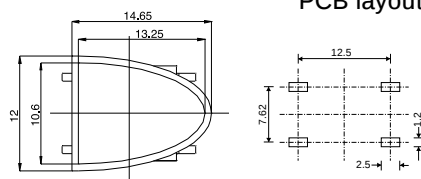

HOW TO ORDER

3 F			+		
Switch	Mounting T through-hole S surface mount	L 6 low temp. H 9 high temp.		Cap  1T	00 blue 03 grey 08 red

Standard versions:

3FTL6
3FTH9
3FSH9

3 F	T		 + 	1 6
Switch	Mounting T through-hole	L 6 low temp. H 9 high temp.	LED 22 green 44 yellow 88 red	Cap  1T transparent white
Standard versions:				

Standard versions:

3FTL622
3FTL644
3FTL688

Combinations of high temperature switches with LED's will be limited by the temperature capability of the LED.

Ordering example: 3 FTL644 + 1V16