
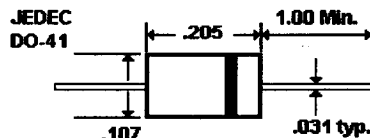


100 uAMP Bi-Directional Diac

9/93

Description
DA30...60 Series

Mechanical Dimensions
DA30...60 Series

Features

- Glass Passivated, Three Layer, for Triggering Thyristors
- Low Breakover Current at Breakover Voltage
- For Lamp dimming, Heat control and Motor speed control

Maximum Ratings (@25 Deg. C)

		DA30	DA40	DA60
Breakover Voltage	Min	28V	35V	56V
	Typ	32V	40V	60V
	Max	36V	45V	70V
Breakover Voltage Symmetry	Volts Max.	3	3	4
Dynamic Breakover Voltage	Volts Max.	5	5	10
Breakover Current	Ibr(1) & Ibr(2) (uA, Max.)	100	100	100
Peak Pulse Current for 10 uS, 120PPS, Ta = <40 Deg. C.	Amps max.	2	2	1.6

