

# VSC7376

## HawX-G26™ – 26-Port 10/100/1000 Managed L2 Ethernet Switch



**APPLICATIONS:**

- ▶ Desktop Switch
- ▶ Workgroup Switch
- ▶ Control-plane Controller Hubs
- ▶ FTTH and Broadband Aggregation
- ▶ Backplane Controller Hubs
- ▶ Advanced TCA

**SPECIFICATIONS:**

- ▶ 0.13um CMOS Technology
- ▶ 1.2 V Core Power Supply
- ▶ 1.8 V/2.5 V and 2.5 V/3.3 V Interface Power Supplies
- ▶ 31 mm x 31 mm 896-ball TEPBGA Package
- ▶ 4.5 W Typical

**FEATURES:**

- ▶ 26 GbE Ports with Nonblocking Wire-speed Performance
- ▶ Triple-speed 10/100/1000 Mbps Operations with SGMII/SerDes Interfaces
- ▶ 736 KB On-chip Frame Buffer with Enhanced Memory on Two Uplink Ports
- ▶ Jumbo Frame Support
- ▶ 8 K MAC Addresses and 4K VLANs (IEEE Std 802.1Q)
- ▶ Selection Between External 8/16/32-bit CPU or On-chip 8051 CPU
- ▶ Programmable L2-L4 Classifier for QoS, Including IEEE Std 802.1p and DSCP (IPv4/IPv6) with 8 Classes of Service
- ▶ Per Queue and Port Shaping and Policing with CIR and PIR Policies
- ▶ Strict and Weighted Queuing with Guaranteed Minimum Bandwidth Allocation
- ▶ Multicast and Broadcast Storm Control
- ▶ Port Based Access Control (IEEE Std 802.1X)
- ▶ Full Duplex Flow Control (IEEE Std 802.3x) and Half Duplex Back Pressure
- ▶ Flexible Link Aggregation Compliant to IEEE Std 802.3ad
- ▶ Multiple Protocol Support: IEEE Std 802.1D, IEEE Std 802.1w, IEEE Std 802.1s

**BENEFITS:**

- ▶ Ensures Maximum Data Throughput on even Highly Loaded Networks
- ▶ Significantly Simplifies PCB Layout and Supports Backplane Architectures
- ▶ Eliminates the Need for External Buffer Memory
- ▶ Connects Effortlessly to Networks, Hosts, and Controllers that Utilize up to 12K Sized Jumbo Frames
- ▶ Stores a Large Amount of Stations a Wire-speed in the On-chip MAC Table, Ensuring Optimal Network Performance
- ▶ Enables Advanced Switch Management
- ▶ Prioritizes Traffic by Classifying into Multiple Clases of Service
- ▶ Enforces Policies to Control Bandwidth Distribution
- ▶ Provides Enhanced Traffic Control and Improved QoS
- ▶ Eliminates Unwanted Flooding of Ports
- ▶ Enables Extra Network Security and Database Controlled Network Access
- ▶ Ensures Loss-less Data Transmission while Supporting Existing Legacy Ethernet Equipment
- ▶ Provides High Bandwidth Uplinking Capabilities
- ▶ Supports Complex Network Topologies with Fast Failure and Recovery

# VSC7376

## HawX-G26™ – 26-Port 10/100/1000 Managed L2 Ethernet Switch

### GENERAL DESCRIPTION:



The VSC7376 is a highly integrated, single chip Ethernet switch with 26 nonblocking 10/100/1000 ports. As part of Vitesse's HawX family of switches, the HawX-G26 enables intelligent local area network (LAN) switching solutions focused on quality of service (QoS), network security, and management to maximize network performance, utilization, and efficiency. With its sophisticated management feature set, the HawX family can be used for a variety of metropolitan area network solutions and control plane applications, in addition to desktop and workgroup switches.


HawX-G26 has been specifically designed to replace existing Fast Ethernet LAN switches that have 24 ports 10/100 + 2 port GbE uplink ports with a 24+2-port GbE switch solution. Managed LAN switches using the HawX-G26 can be used to easily upgrade enterprise networks, providing GbE to the desktop utilizing the existing cable infrastructure. Overall, network performance can be increased with minimal IT spending.

HawX-G26 supports 26 ports of triple-speed 10/100/1000 Mbps SGMII/SerDes interfaces, wire-speed performance, and on

-chip memory. Features include jumbo frame support, link aggregation, flow control, spanning tree, and port-based access control. All the HawX switches provide unparalleled QoS features necessary for building cost-effective layer 2 managed switch solutions. Key QoS benefits include programmable multi-layer classification with 8 priorities, minimum guaranteed bandwidth allocation, per queue shaping and policing with Committed Info Rate (CIR) and Peak Info Rate (PIR) policies, and Differentiated Services Code Point (DSCP) remarking.

The VSC7376 includes an extensive suite of software solutions, development tools, and technical support. Software API and SDK solutions are available and nearly 100% compatible to all other Vitesse Ethernet switches. Vitesse reference designs, coupled with the API and SDK solutions, enable vendors developing their own hardware and software systems to begin design immediately. For customers wanting simpler development, turnkey software solutions are available through 3rd party vendors.

### BLOCK DIAGRAM:

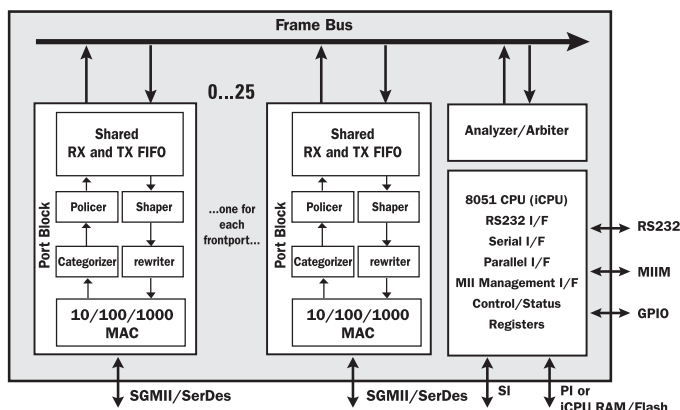

For more information on Vitesse Products visit the Vitesse web site at [www.vitesse.com](http://www.vitesse.com) or contact Vitesse Sales at (800) VITESSE or [sales@vitesse.com](mailto:sales@vitesse.com)

Vitesse, ASIC-Friendly, FibreTimer, TimeStream and Snoo Loop are trademarks of Vitesse Semiconductor Corporation. All other trademarks or registered trademarks mentioned herein are the property of their respective holders. Vitesse Semiconductor Corporation ("Vitesse") retains the right to make changes to its products or specifications to improve performance, reliability or manufacturability. All information in this document, including descriptions of features, functions, performance, technical specifications and availability, is subject to change without notice at any time.

# VITESSE

741 Calle Plano  
Camarillo, CA 93012, USA  
Tel: +1 805.388.3700  
Fax: +1 805.987.5896  
[www.vitesse.com](http://www.vitesse.com)