



High energy absorption cylinder, double acting/single rod type

HCM Series

- Bore size: 20, 25, 32, 40, 50, 63 mm

JIS symbol



Specifications

Descriptions	HCM						
	20 dia.	25 dia.	32 dia.	40 dia.	50 dia.	63 dia.	
Bore size mm							
Actuation	Double acting						
Working fluid	Compressed air						
Max. working pressure MPa	1.0						
Min. working pressure MPa	0.15						
Withstanding pressure MPa	1.6						
Ambient temperature °C	-10 to 60 (to be unfrozen)						
Port size	Rc $\frac{1}{8}$	Rc $\frac{1}{4}$	Rc $\frac{3}{8}$	Rc $\frac{1}{2}$	Rc $\frac{3}{4}$	Rc 1	
Stroke length tolerance mm	$^{+2.0}_0$		$^{+2.0}_0$				
Working piston speed mm/s	50 to 2000 (use this within the range of allowable energy absorption.)						
Cushion	Air cushion						
Lubrication	Not required (when lubrication, use turbine oil Class 1 ISOVG32.)						
Allowable energy absorption J Note 1	Air cushion	3	5	9	14	23	30
Effective cushion length mm	56.5	56.5	56.5	55.5	58.5	58.5	

Note 1: When kinetic energy exceeds this value, consider installing an external shock absorber.
Please refer to Page 1428 to 1431 about energy calculation/size selection.

Stroke length

Stroke length (Note 1)							
Bore size mm	20 dia.	25 dia.	32 dia.	40 dia.	50 dia.	63 dia.	
Stroke range mm	200 to 700			200 to 1000			

Note 1: Consult with CKD about stroke length other than above.

Cylinder mass

(Unit: kg)

Bore size (mm)		20 dia.	25 dia.	32 dia.	40 dia.	50 dia.	63 dia.
Product mass when 0 mm stroke	Basic type 00	0.33	0.47	0.62	0.98	1.58	2.27
	Axial foot type LB	0.44	0.6	0.78	1.2	2.06	2.99
	Flange type FA/FB	0.36	0.51	0.68	1.06	1.92	2.77
Switch mass (per switch)							0.018
Additional mass per stroke length without switch 100mm	0.012		0.016	0.017	0.027	0.040	0.044
Additional mass per stroke length with switch rail 100mm	0.014		0.018	0.019	0.029	0.042	0.046

[Calculation e.g.]

Product mass of HCM-LB-40B-500-T2H-D

When stroke length 0mm, product mass is 1.2kg.

Additional mass at stroke length 500mm is $0.029 \times \frac{500}{100} = 0.145\text{kg}$.

Mass of two switch is $0.018 \times 2 = 0.036\text{kg}$

Product mass is $1.2 + 0.145 + 0.036 = 1.381\text{kg}$

HCM Series

Specifications

SCP * 2
 CMK2
 CMA2
 SCM
 SCA2
 SCS
 CKV2
 CAV2/
 COV * 2
 CAT
 MDC2
 MVC
 SMD2
 MSD/
 MSDG
 SSD
 SSD
 (large)
 FC *
 ULKP/
 ULK
 JSK2/
 JSM2
 JSC3
 (medium)
 JSC3
 (large)
 JSB3
 UCAC
 STS/
 STL
 LCS
 LCY
 STR2
 UCA2
 STK
 USSD
 USC
 MFC
 GLC
 SHC
 CAC3
HCM
 HCA
 MRL2
 SRL2
 SRG
 SRM
 SRT
 SRB2

High-speed type
 High energy absorption cylinder

Switch specifications

- One color/bi-color indicator

Descriptions	Proximity 2 wire		Proximity 3 wire		Reed 2 wire	
	T2H/T2V/T2JH/T2JV	T2YH/T2YV	T3H/T3V	T3YH/T3YV	T0H/T0V	T5H/T5V
Applications	Programmable controller		Programmable controller, relay		Programmable controller, relay	
Power voltage	-		DC10 to 28V		-	
Load voltage	DC10 to 30V		DC30V or less		DC12/24V	AC110V
Load current	5 to 20mA (Note 1)		100mA or less	50mA or less	5 to 50mA	7 to 20mA
Light	LED (ON lighting)	Red/green LED (ON lighting)	LED (ON lighting)	Red/green LED (ON lighting)	LED (ON lighting)	-

Note 1: Max. load current : 20mA above is the value at 25 °C. When ambient temperature around a switch is higher than 25 °C, the value is lower than 20mA. (5 to 10mA at 60 °C).

- With preventive maintenance output


Descriptions	Proximity 3 wire		Proximity 4 wire	
	T2YFH/V	T3YFH/V	T2YMH/V	T3YMH/V
Applications	Programmable controller		Programmable controller, relay	
Light	Red/green LED (ON lighting)			
	Yellow LED (ON lighting)			
Output	Current voltage	-	DC10 to 28V	-
	Load voltage	DC10 to 30V	DC30V or less	DC10 to 30V
	Load current	DC5 to 20mA	DC50mA or less	DC5 to 20mA
Preventive maintenance output	Load voltage	DC30V or less		
	Load current	DC20mA or less	DC50mA or less	DC5 to 20mA or less

- Strong magnetic field

Descriptions	Proximity switch	
	T2YD	
Applications	Programmable controller	
Light	Red/green LED (ON lighting)	
Load voltage	DC24V±10%	
Load current	5 to 20mA	
Internal voltage drop	6V or less	
Leakage current	1.0mA or less	

HCM Series

How to order



A Mounting style

B Bore size

C Cushion

D Stroke length

E Switch model No.

F Switch quantity

G Option

H Accessory

Symbol	Descriptions
A Mounting style	
00	Basic type
LB	Axial foot type
FA	Rod side flange type
FB	Head side flange type

B Bore size (mm)	
20	20 dia.
25	25 dia.
32	32 dia.
40	40 dia.
50	50 dia.
63	63 dia.

C Cushion	
B	Both sides cushion
R	Rod side cushion
H	Head side cushion
N	No cushion

Bore size (mm)	D Stroke length (mm)					
	20	25	32	40	50	63
200	200	●	●	●	●	●
250	250	●	●	●	●	●
300	300	●	●	●	●	●
350	350	●	●	●	●	●
400	400	●	●	●	●	●
450	450	●	●	●	●	●
500	500	●	●	●	●	●
550	550	●	●	●	●	●
600	600	●	●	●	●	●
650	650	●	●	●	●	●
700	700	●	●	●	●	●
750	750	-	-	-	●	●
800	800	-	-	-	●	●
850	850	-	-	-	●	●
900	900	-	-	-	●	●
950	950	-	-	-	●	●
1000	1000	-	-	-	●	●

E Switch model No.		Reed/Contact	Indicator	Lead wire
Lead wire Straight type	Lead wire Radial type			
T0H *	T0V *	1 color indicator	2 wire	
T5H *	T5V *			
T2H *	T2V *			
T3H *	T3V *	1 color indicator	3 wire	
T2YH *	T2YV *			
T3YH *	T3YV *	2 color indicator	3 wire	
T2YFH *	T2YFV *			
T3YFH *	T3YFV *	With preventive maintenance output	4 wire	
T2YMH *	T2YMV *			
T3YMH *	T3YMV *			
T2YD *	-	Strong magnetic field proof switch	2 wire	
T2YDT *	-			
T2YH *	T2JV *	Off delay type	2 wire	

* Lead wire length	
Blank	1m (standard)
3	3m (option)
5	5m (option)

F Switch quantity	
R	One on rod side
H	One on head side
D	Two
T	Three
4	4
5	5

G Option	
Q	Switch rail attached at shipment
M	Piston rod material (stainless steel)

H Accessory	
I	Rod eye
Y	Rod clevis

<Example of model number>

HCM-LB-40B-500-T2H-D-QI

Model: High energy absorption cylinder, double acting

A Mounting style : Axial foot type

B Bore size : 40 mm

C Cushion : Both sides cushion

D Stroke length : 500 mm

E Switch model No.: Proximity T2H switch, lead wire 1m

F Switch quantity : Two

G Option : Switch rail attached at shipment


H Accessory : Rod eye

HCM Series


How to order

How to order switch


• Switch main body + mounting rail set

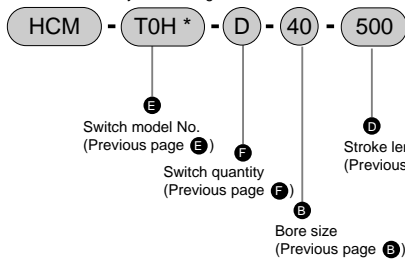

• Mounting rail only



• Switch only



Mounting bracket model No.

Bore size	Foot (LB)	Flange (FA/FB)
20 dia.	HCM-LB-20	HCM-FA-20
25 dia.	HCM-LB-25	HCM-FA-25
32 dia.	HCM-LB-32	HCM-FA-32
40 dia.	HCM-LB-40	HCM-FA-40
50 dia.	HCM-LB-50	HCM-FA-50
63 dia.	HCM-LB-63	HCM-FA-63

- SCP * 2
 - CMK2
 - CMA2
 - SCM
 - SCA2
 - SCS
 - CKV2
 - CAV2/COV* 2
 - CAT
 - MDC2
 - MVC
 - SMD2
 - MSD/MSDG
 - SSD
 - SSD (large)
 - FC *
 - ULKP/ULK
 - JSK2/JSW2
 - JSC3 (medium)
 - JSC3 (large)
 - JSB3
 - UCAC
 - STS/STL
 - LCS
 - LCY
 - STR2
 - UCA2
 - STK
 - USSD
 - USC
 - MFC
 - GLC
 - SHC
 - CAC3
 - HCM**
 - HCA
 - MRL2
 - SRL2
 - SRG
 - SRM
 - SRT
 - SRB2
- High-speed type
High energy absorption cylinder