

4 M × 8-Bit Dynamic RAM Module

HYM 84500S/-60/-70/-80
HYM 84500L/-60/-70/-80

Advanced Information

- 4 194 304 words by 8-bit organization
- Fast access and cycle time
 - 60 ns access time
 - 110 ns cycle time (-60 version)
 - 70 ns access time
 - 130 ns cycle time (-70 version)
 - 80 ns access time
 - 150 ns cycle time (-80 version)
- Fast page mode capability with
 - 45 ns cycle time (-60/-70 version)
 - 50 ns cycle time (-80 version)
- Single + 5 V (± 10 %) supply
- Low power dissipation
 - max. 4840 mW active (-60 version)
 - max. 4400 mW active (-70 version)
 - max. 3740 mW active (-80 version)
 - CMOS – 44 mW standby
 - TTL – 88 mW standby
- $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh, $\overline{\text{RAS}}$ -only-refresh, Hidden refresh
- 8 decoupling capacitors mounted on substrate
- All inputs, outputs and clocks fully TTL compatible
- Single in-Line Memory Module socket (HYM 84500S) and lead (HYM 84500L) version
- Pin configuration according to JEDEC standards
- Utilizes eight 4M × 1-DRAMs in 300 mil wide SOJ packages
- 1024 refresh cycles / 16 ms

The HYM 84500S/L-60/-70/-80 is a 4 Mbyte RAM module organized as 4 194 304 words by 8-bit in a 30-pin single-in-line package comprising eight HYB 514100BJ 4 M × 1 DRAMs in 300 mil wide SOJ-packages mounted together with eight 0.2 µF multilayer ceramic decoupling capacitors on a PC board.

Each HYB 514100AJ is described in the data sheet and is fully electrical tested and processed according to Siemens standard quality procedure prior to module assembly. After assembly onto the board, a further set of electrical tests is performed.


The common I/O feature on the HYM 84500S/L-60/-70/-80 dictates the use of early write cycles.

Ordering Information


Type	Ordering Code	Package	Descriptions
HYM 84500S-60	Q67100-Q656	L-SIM-30-3	DRAM Module (access time 60 ns) ¹⁾
HYM 84500S-70	Q67100-Q647	L-SIM-30-3	DRAM Module (access time 70 ns) ¹⁾
HYM 84500S-80	Q67100-Q502	L-SIM-30-3	DRAM Module (access time 80 ns) ¹⁾
HYM 84500L-60	on request	L-SIM-30-4	DRAM Module (access time 60 ns) ²⁾
HYM 84500L-70	Q67100-Q724	L-SIM-30-4	DRAM Module (access time 70 ns) ²⁾
HYM 84500L-80	on request	L-SIM-30-4	DRAM Module (access time 80 ns) ²⁾

¹⁾ Socket type

²⁾ Pin type

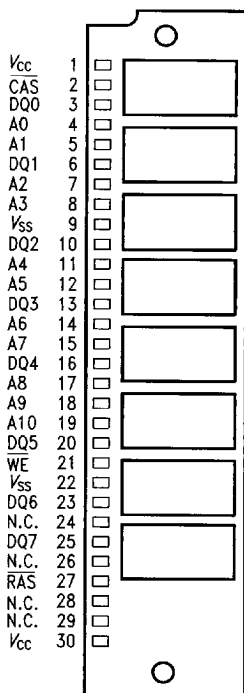

HYM 84500S
(Socket type)

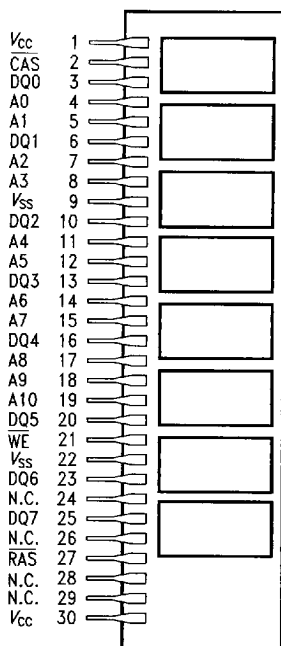

SPP02205


HYM 84500L
(Pin type)

Pin Names

A0-A10	Address Inputs
DQ0-DQ7	Data Input/Output
RAS	Row Address Strobe
CAS	Column Address Strobe

$\overline{WE}$	Read/Write Input
V_{CC}	Power Supply (+ 5 V)
V_{SS}	Ground (0 V)
N.C.	No Connection

Pin Configuration

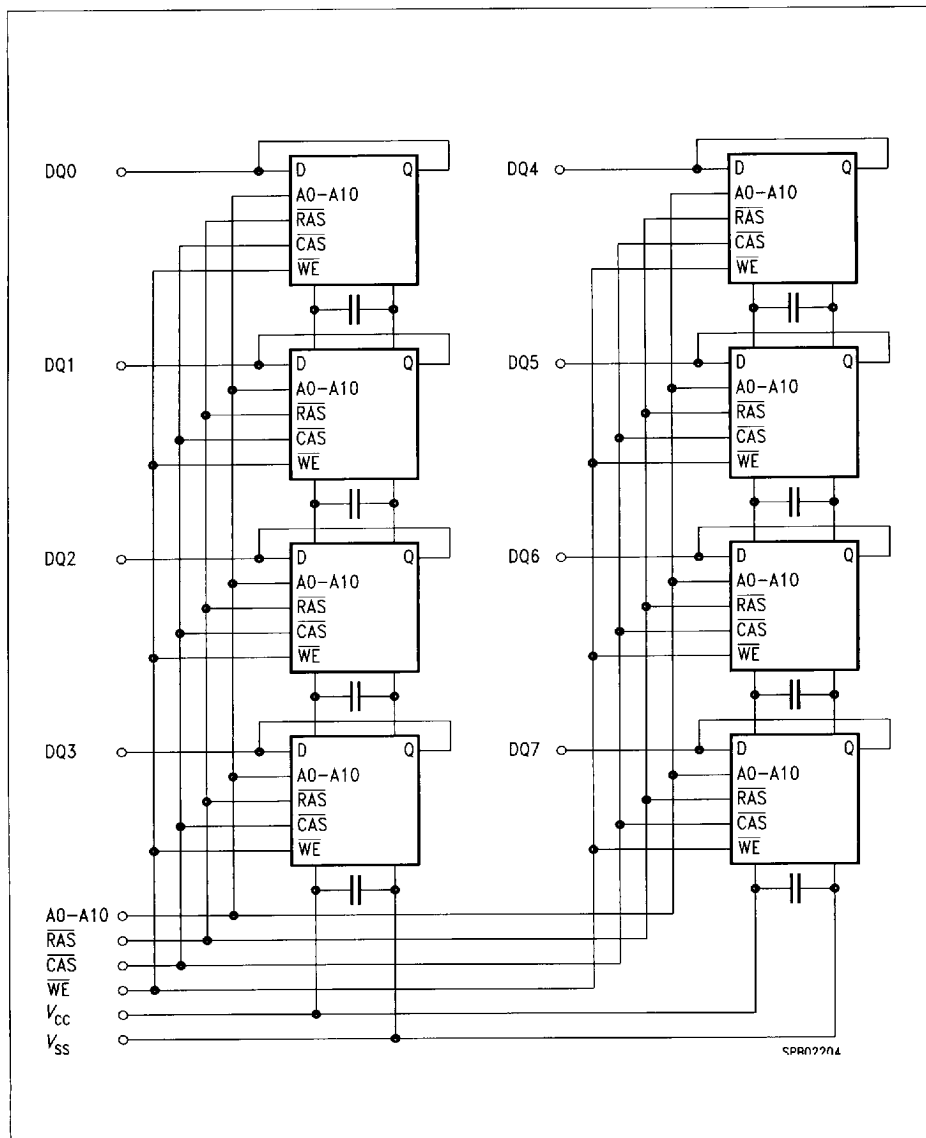

Block Diagram

Absolute Maximum Ratings

Operating temperature range	0 to + 70 °C
Storage temperature range.....	– 55 to + 125 °C
Soldering temperature	260 °C
Soldering time	10 s
Input/output voltage	– 1 to + 7 V
Power supply voltage.....	– 1 to + 7 V
Power dissipation.....	6.16 W
Data out current (short circuit)	50 mA

Note: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

DC Characteristics ¹⁾

$T_A = 0$ to 70 °C; $V_{CC} = 5$ V $\pm$ 10 %

Parameter	Symbol	Limit Values		Unit	Test Condition
		min.	max.		
Input high voltage	V_{IH}	2.4	6.5	V	–
Input low voltage	V_{IL}	– 1.0	0.8	V	–
Output high voltage ($I_{OUT} = -5$ mA)	V_{OH}	2.4	–	V	–
Output low voltage ($I_{OUT} = 4.2$ mA)	V_{OL}	–	0.4	V	–
Input leakage current (0 V < V_{IN} < 6.5 V, all other pins = 0 V)	$I_{I(L)}$	– 10	10	μA	–
Output leakage current (DO is disabled, 0 V < V_{OUT} < 5.5 V)	$I_{O(L)}$	– 10	10	μA	–
Average V_{CC} supply current: HYM 84500S/L-60 HYM 84500S/L-70 HYM 84500S/L-80 ($\overline{RAS}$, $\overline{CAS}$, address cycling, $t_{RC} = t_{RC\ min.}$)	I_{CC1}	– – –	880 800 680	mA mA mA	2), 3)
Standby V_{CC} supply current ($\overline{RAS} = \overline{CAS} = V_{IH}$)	I_{CC2}	–	16	mA	–
Average V_{CC} supply current during $\overline{RAS}$ only refresh cycles: HYM 84500S/L-60 HYM 84500S/L-70 HYM 84500S/L-80 ($\overline{RAS}$ cycling, $\overline{CAS} = V_{IH}$, $t_{RC} = t_{RC\ min.}$)	I_{CC3}	– – –	880 800 680	mA mA mA	2)

Notes see page 319.

DC Characteristics (cont'd) ¹⁾

Parameter	Symbol	Limit Values		Unit	Test Condition
		min.	max.		
Average V_{CC} supply current during fast page mode: HYM 84500S/L-60 HYM 84500S/L-70 HYM 84500S/L-80 ($\overline{RAS} = V_{IL}$, $\overline{CAS}$, address cycling: $t_{PC} = t_{PC \min.}$)	I_{CC4}	— — —	560 480 400	mA mA mA	2), 3)
Standby V_{CC} supply current ($\overline{RAS} = \overline{CAS} = V_{CC} - 0.2 \text{ V}$)	I_{CC5}	—	8	mA	—
Average V_{CC} supply current during $\overline{CAS}$ -before- $\overline{RAS}$ refresh mode: HYM 84500S/L-60 HYM 84500S/L-70 HYM 84500S/L-80 ($\overline{RAS}$, $\overline{CAS}$ cycling, $t_{RC} = t_{RC \min.}$)	I_{CC6}	— — —	880 900 680	mA mA mA	2)

Notes see page 319.

Capacitance

 $T_A = 0 \text{ to } 70^\circ\text{C}$; $V_{CC} = 5 \text{ V} \pm 10\%$; $f = 1 \text{ MHz}$

Parameter	Symbol	Limit Values		Unit
		min.	max.	
Input capacitance (A0 to A10)	C_{I1}	—	70	pF
Input capacitance ($\overline{RAS}$, $\overline{CAS}$, $\overline{WE}$)	C_{I2}	—	50	pF
I/O capacitance (DQ0 to DQ7)	C_{I0}	—	17	pF

AC Characteristics ^{4) 5)} $T_A = 0 \text{ to } 70^\circ\text{C}$; $V_{CC} = 5 \text{ V} \pm 10\%$; $t_r = 5 \text{ ns}$

Parameter	Symbol	Limit Values						Unit
		-60		-70		-80		
		min.	max.	min.	max.	min.	max.	
Random read or write cycle time	t_{RC}	110	—	130	—	150	—	ns
Fast page mode cycle time	t_{PC}	45	—	45	—	50	—	ns
Access time from $\overline{\text{RAS}}$ ^{6) 11) 12)}	t_{RAC}	—	60	—	70	—	80	ns
Access time from $\overline{\text{CAS}}$ ^{6) 11)}	t_{CAC}	—	20	—	20	—	20	ns
Access time from column address ^{6) 12)}	t_{AA}	—	30	—	35	—	40	ns
Access time from $\overline{\text{CAS}}$ precharge ⁶⁾	t_{CPA}	—	40	—	40	—	45	ns
$\overline{\text{CAS}}$ to output in low-Z ⁶⁾	t_{CLZ}	0	—	0	—	0	—	ns
Output buffer turn-off delay ⁷⁾	t_{OFF}	0	20	0	20	0	20	ns
Transition time (rise and fall) ⁵⁾	t_T	3	50	3	50	3	50	ns
$\overline{\text{RAS}}$ precharge time	t_{RP}	40	—	50	—	60	—	ns
$\overline{\text{RAS}}$ pulse width	t_{RAS}	60	10000	70	10000	80	10000	ns
$\overline{\text{RAS}}$ pulse width (fast page mode)	t_{RASP}	60	200000	70	200000	80	200000	ns
$\overline{\text{RAS}}$ hold time	t_{RSH}	20	—	20	—	20	—	ns
$\overline{\text{CAS}}$ hold time	t_{CSH}	60	—	70	—	80	—	ns
$\overline{\text{CAS}}$ pulse width	t_{CAS}	20	10000	20	10000	20	10000	ns
$\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ delay time ¹¹⁾	t_{RCD}	20	40	20	50	20	60	ns
$\overline{\text{RAS}}$ to column address delay time ¹²⁾	t_{RAD}	15	30	15	35	15	40	ns
$\overline{\text{CAS}}$ to $\overline{\text{RAS}}$ precharge time	t_{CRP}	5	—	5	—	5	—	ns
$\overline{\text{CAS}}$ precharge time (fast page mode)	t_{CP}	10	—	10	—	10	—	ns
Row address setup time	t_{ASR}	0	—	0	—	0	—	ns
Row address hold time	t_{RAH}	10	—	10	—	10	—	ns
Column address setup time	t_{ASC}	0	—	0	—	0	—	ns
Column address hold time	t_{CAH}	15	—	15	—	15	—	ns

Notes see page 319.

AC Characteristics ^{4) 5)} (cont'd) $T_A = 0$ to $70\text{ }^{\circ}\text{C}$; $V_{CC} = 5\text{ V} \pm 10\%$; $t_r = 5\text{ ns}$

Parameter	Symbol	Limit Values						Unit
		-60		-70		-80		
		min.	max.	min.	max.	min.	max.	
Column address hold time ref. to $\overline{\text{RAS}}$	t_{AR}	50	—	55	—	60	—	ns
Column address to $\overline{\text{RAS}}$ lead time	t_{RAL}	30	—	35	—	40	—	ns
Read command setup time	t_{RCS}	0	—	0	—	0	—	ns
Read command hold time ⁸⁾	t_{RCH}	0	—	0	—	0	—	ns
Read command hold time ref. to $\overline{\text{RAS}}$ ⁸⁾	t_{RRH}	0	—	0	—	0	—	ns
Write command hold time	t_{WCH}	10	—	15	—	15	—	ns
Write command hold time ref. to $\overline{\text{RAS}}$	t_{WCR}	45	—	55	—	60	—	ns
Write command pulse width	t_{WP}	10	—	15	—	15	—	ns
Write command to $\overline{\text{RAS}}$ lead time	t_{RWL}	20	—	20	—	20	—	ns
Write command to $\overline{\text{CAS}}$ lead time	t_{CWL}	20	—	20	—	20	—	ns
Data setup time ⁹⁾	t_{DS}	0	—	0	—	0	—	ns
Data hold time ⁹⁾	t_{DH}	15	—	15	—	15	—	ns
Data hold time ref. to $\overline{\text{RAS}}$	t_{DHR}	50	—	55	—	60	—	ns
Refresh period	t_{REF}	—	16	—	16	—	16	ms
Write command setup time ¹⁰⁾	t_{WCS}	0	—	0	—	0	—	ns
$\overline{\text{CAS}}$ setup time ¹³⁾	t_{CSR}	5	—	5	—	5	—	ns
$\overline{\text{CAS}}$ hold time ¹³⁾	t_{CHR}	15	—	15	—	15	—	ns
$\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ precharge time	t_{RPC}	0	—	0	—	0	—	ns
$\overline{\text{CAS}}$ precharge time ¹³⁾	t_{CPN}	10	—	10	—	10	—	ns
Write to $\overline{\text{RAS}}$ precharge time ¹³⁾	t_{WRP}	10	—	10	—	10	—	ns
Write hold time ref. to $\overline{\text{RAS}}$ ¹³⁾	t_{WRH}	10	—	10	—	10	—	ns

Notes see page 319.

Waveforms see page 391.

Notes for pages 315 to 318:

- 1) All voltages are referenced to V_{SS} .
- 2) I_{CC1} , I_{CC3} , I_{CC4} and I_{CC6} depend on cycle rate.
- 3) I_{CC1} and I_{CC4} depend on output loading. Specified values are measured with the output open.
- 4) An initial pause of 200 μ s is required after power-up followed by 8 $\overline{RAS}$ cycles out of which at least one cycle has to be a refresh cycle before proper device operation is achieved. In case of using internal refresh counter, a minimum of 8 $\overline{CAS}$ -before- $\overline{RAS}$ initialization cycles instead of 8 $\overline{RAS}$ cycles are required.
- 5) $V_{IH}(\text{min.})$ and $V_{IL}(\text{max.})$ are reference levels for measuring timing of input signals. Transition times are also measured between V_{IH} and V_{IL} .
- 6) Measured with a load equivalent of 2 TTL loads and 100 pF.
- 7) $t_{OFF}(\text{max.})$ defines the time at which the output achieves the open-circuit condition and is not referenced to output voltage levels.
- 8) Either t_{RCH} or t_{RRH} must be satisfied for a read cycle.
- 9) These parameters are referenced to the $\overline{CAS}$ leading edge.
- 10) t_{WCS} is not a restrictive operating parameter. This is included in the data sheet as electrical characteristic only. If $t_{WCS} > t_{WCS}(\text{min.})$, the cycles is an early write cycle and data out pin will remain open circuit (high impedance).
- 11) Operation within the $t_{RCD}(\text{max.})$ limit insures that $t_{RAC}(\text{max.})$ can be met. $t_{RCD}(\text{max.})$ is specified as a reference point only. If t_{RCD} is greater than the specified $t_{RCD}(\text{max.})$ limit, then access time is controlled by t_{CAC} .
- 12) Operation within the $t_{RAD}(\text{max.})$ limit insures that $t_{RAC}(\text{max.})$ can be met. $t_{RAD}(\text{max.})$ is specified as a reference point only. If t_{RAD} is greater than the specified $t_{RAD}(\text{max.})$ limit, then access time is controlled by t_{AA} .
- 13) For $\overline{CAS}$ -before- $\overline{RAS}$ cycles only.