







DIMENSIONS: mm (In.)



WHITE LINE
INDICATES
PIN # 1

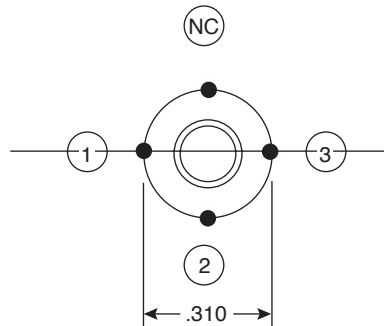

BOTTOM VIEW



CIRCUIT DIAGRAM

■ Specifications:

- Type: high voltage trigger
- Input: 300V
- Output: 6000V
- DCR (N1): 160mΩ max.
- DCR (N2): 180Ω ±20%
- Wire (N1): polyurethane enameled copper wire; .25mm (2UEW) 11 1/2 TS
- Wire (N2): polyurethane enameled copper wire; .06mm (USTC) 800TS
- Bobbin: phenolic molding powder 6.5x8x17mm
- Core: ferrite core E5 R 5.8x15.8mm
- Insulating tape: polyester film, 500 E74186(S)
- Wax: fully refined paraffin wax 135°/140° F

