


ADSL FREQUENCY FILTER INDUCTORS



- ➊ Matched to Centillium CT-L50SC04 chipset
- ➋ Excellent THD performance in a small footprint
- ➌ Used exclusively for frequency filtering

Electrical Specifications @ 25°C — Operating Temperature -40°C to 85°C



Part Number	Mounting	Application	Turns Ratio (1-6):(2-5) (± 2%)	Inductance (μH)	DC Resistance (Ω MAX)	Isolation Voltage (Vrms)
B2208 ¹	SMT	CO	1:1	(1-6) = 170 ± 7%	(1-6) = (2-5) = 4	500
B2209 ¹	SMT	CO	1:1	(1-6) = 300 ± 7%	(1-6) = (2-5) = 7	500
B2210 ¹	SMT	CO	1:1	(1-6) = 455 ± 7%	(1-6) = (2-5) = 9	500

¹ Transformers are shipped in trays, unless Tape & Reel packaging is specified by adding the suffix "T" to this part number (B2208T)



Mechanical

Schematic

B22XX

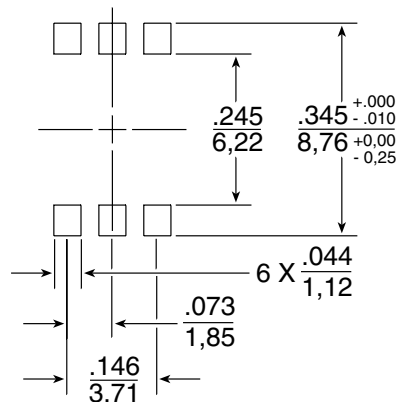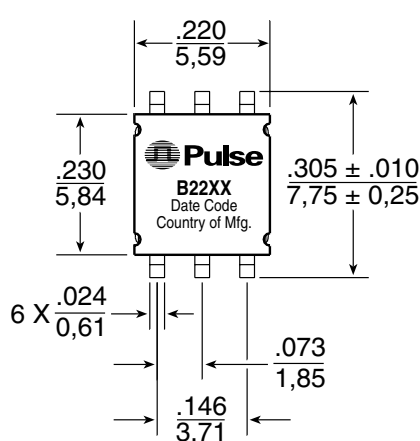

SUGGESTED PAD LAYOUT

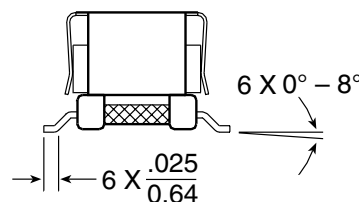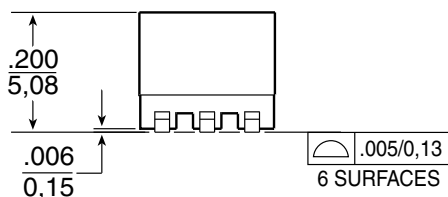

Weight 0.38 grams
Tape & Reel 1000/reel
Tray 80/tray
Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0.25}$

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 287 8998 FAX: 65 280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.