



Easy to fit
Increased protection

Vacuum equipment




Vacuum gauge



Type VAM-...

Vacuum filter



VAF-PK-...

FESTO


These gauges offer economic and reliable pressure indication and are mounted via their threaded connectors.

Vacuum filter: Type VAF-...

When using vacuum equipment in pick and place applications, contaminants drawn in via suction cups can cause damage to system components. This simple filter, installed in the vacuum line, provides protection and minimises down-time.

For details of vacuum switches, see page L.3/20, L.3/40 and L.3/45.


- Filter has transparent body to allow inspection
- Vacuum gauges available with 3 display ranges
- VAM-63-V1/9-1/4 overpressure safe – ideal for vacuum/eject applications

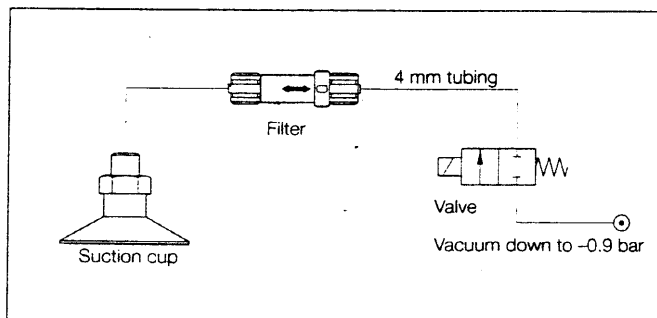

708-6933

Type	VAM-40-V1/0-1/8	VAM-63-V1/0-1/4	VAM-63-V1/9-1/4
Position of connection	At rear		
Connection size	G 1/8	G 1/4	
Pressure range	-1 to 0 bar	-1 to 0 bar	-1 to +9 bar
External diameter	40 mm	63 mm	

Type	VAF-PK-4	VAF-PK-6
Connection	Quick connector for 4 or 6 mm plastic tubing	
Pressure range	-0.9 to +7 bar*	
Degree of filtration	50 µm	
Nominal size	3 mm	4.6 mm
Temperature range	0 to +40 °C	
*Vacuum tight only with PU, PUN plastic tubing		





How to order: Vacuum gauge: Select desired vacuum range and diameter

Example: Vacuum gauge -1 to 0 bar, 63 mm dia.
= VAM-63-V1/0-1/4

For more information contact Festo