



R13-502

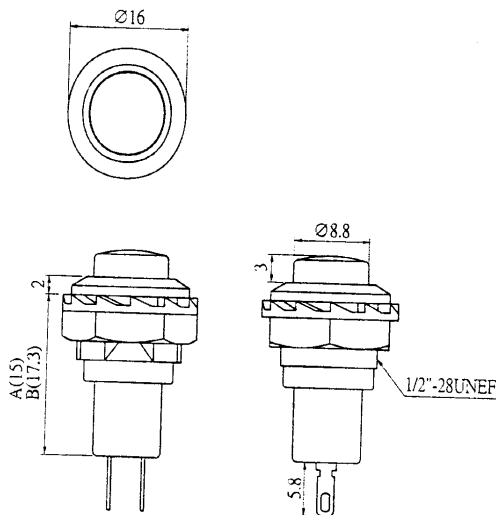

Rating
3A 125V AC
1.5A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1000V 1 minute
Cut-out



3 mm max

FEATURES

- * MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * M types are metal frames, nickel plated brass.

R13-502

BODY	FUNCTION	TERMINAL
Plastic Body 	A OFF 2P SPST (ON)	0 5 SO
M Metal Body 	B (OFF) 2P SPST ON	
	C ON 3P SPDT (ON) (Only for R13-502MC)	



R13-502A-05



R13-502MC-05



R13-502MC-05