





CYCLON SINGLE CELL

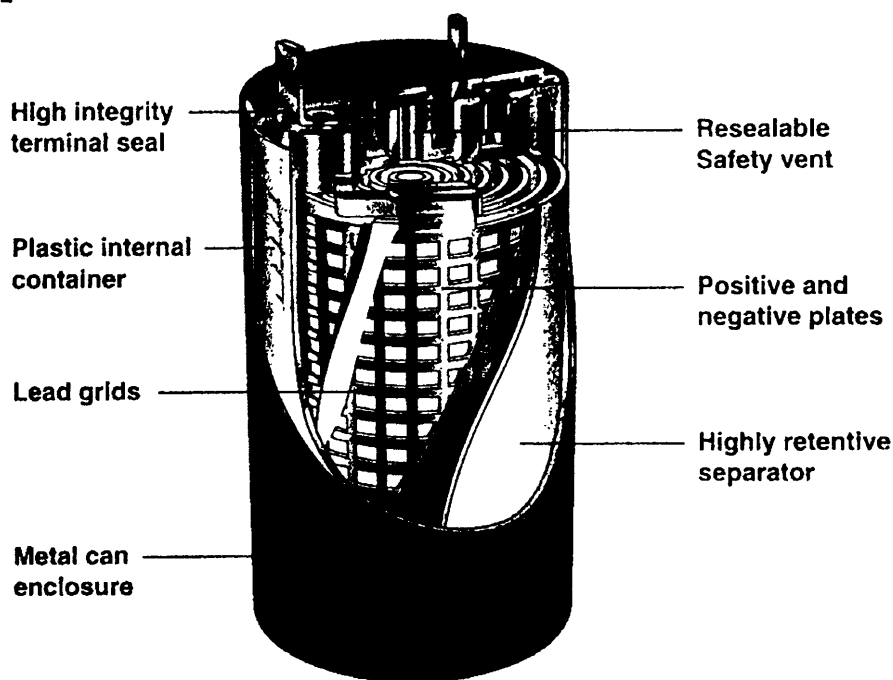


ALTERNATIVE BATTERY CONFIGURATIONS


Standard battery configurations are rectangular in overall shape. A sample of other possible configurations are illustrated below. These can be held together with tape (offering the lowest cost and minimum electrical and mechanical protection) or by shrink wrapping. The Cyclon Single Cell can be custom configured in virtually an infinite number of designs.




Rectangular




Rhomboid




Trapezoid



Nested






Tubular

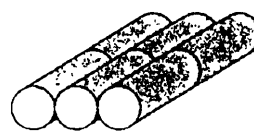

Flat Pack

CYCLON[®] SELECTION GUIDE**CYCLON SINGLE CELL MECHANICAL SPECIFICATIONS**

DIMENSIONS in. (mm)											
Products	A	B	C	D	E	F	G	H	I	J	Weight oz. (gm)
D cell	0.27 (6.9)	0.51 (13.0)	.187 (4.75)	22°	0.27 (6.9)	0.025 (0.64)	2.41 (61.2)	0.05 (1.3)	0.13 (3.3)	1.35 (34.3)	6.28 (178.0)
Tall D cell	0.27 (6.9)	0.51 (13.0)	.187 (4.75)	22°	0.27 (6.9)	0.025 (0.64)	3.78 (96.0)	0.05 (1.3)	0.13 (3.3)	1.35 (34.3)	9.60 (272.2)
X cell	0.29 (7.4)	0.61 (15.5)	0.250 (6.35)	22°	0.34 (8.6)	0.025 (0.64)	2.87 (72.9)	0.06 (1.5)	0.14 (3.6)	1.75 (44.5)	12.77 (362.0)
E cell	0.29 (7.4)	0.61 (15.5)	0.250 (6.35)	22°	0.34 (8.6)	0.025 (0.64)	3.94 (100.1)	0.06 (1.5)	0.14 (3.6)	1.75 (44.5)	19.40 (548.9)
J cell	0.32 (8.1)	0.74 (18.8)	0.312 (7.92)	22°	0.49 (12.4)	0.032 (0.81)	4.85 (123.2)	0.05 (1.3)	0.15 (3.8)	2.04 (51.8)	29.60 (839.2)



DIMENSIONS in. (mm)											Weight lb. (kg)
Products	A	B	C	D	E	F	G	H	I		
BC cell	0.65 (16.5)	1.30 (33.0)	22°	0.57 (14.5)	0.22 (5.6)	6.25 (158.8)	0.06 (1.5)	0.13 (3.3)	2.57 (65.3)		3.68 (1.67)

