

Photocoupler

KODENSHI

PC-18T1 • PC-18T2 • PC-18T4

These Photocouplers consist of a Gallium Arsenide Infrared Emitting Diode and a Silicon NPN Photo Darlington transistor per channel.

The PC-18T1 has one channel in a 4-pin package.

The PC-18T2 has two channels in a 8-pin package.

The PC-18T4 has four channels in a 16-pin package.

FEATURES

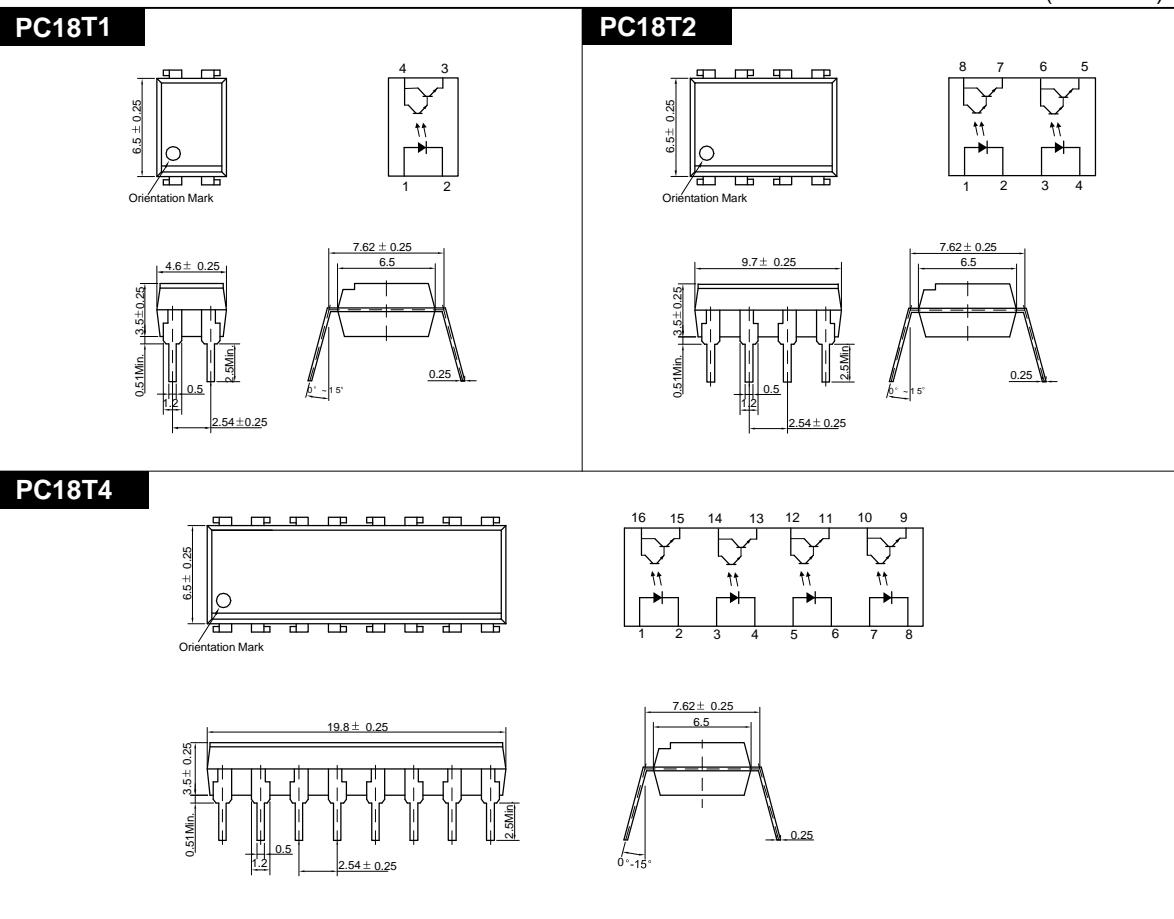
- Small Package Size
- Collector-Emitter Voltage : Min.30V
- Current Transfer Ratio : Type 1000% (at $I_F=1\text{mA}$, $V_{CE}=2\text{V}$)
- Electrical Isolation Voltage : AC2500V_{rms}
- UL Recognized File No. E107486

APPLICATIONS

- Interface between two circuits of different potential
- Telephone Line Receiver
- Automatic Vending Machine
- Power Supply Regulators

DIMENSION

(Unit : mm)



Photocoupler



PC-18T1 • PC-18T2 • PC-18T4

MAXIMUM RATINGS

(Ta=25)

Parameter	Symbol	Rating	Unit
Input	Forward Current	I _F	60 mA
	Reverse Voltage	V _R	5 V
	Peak Forward Current ^{*1}	I _{FP}	1 A
	Power Dissipation	P _D	150 mW
	Junction Temperature	T _J	125
Output	Collector-Emitter Breakdown Voltage	BV _{CCEO}	30 V
	Emitter-Collector Breakdown Voltage	BV _{ECEO}	5 V
	Collector Current	I _C	50 mA
	Collector Power Dissipation	P _C	150 mW
Input to Output Isolation Voltage ^{*2}	V _{Iso}	AC2500	V _{rms}
Storage Temperature	T _{Stg}	-55~+125	
Operating Temperature	T _{opr}	-30~+100	
Lead Soldering Temperature ^{*3}	T _{SOL}	260	
Total Power Dissipation	P _{tot}	250	mW

*1. Input current with 100μs pulse width, 1% duty cycle

*2. Measured at RH=40~60% for 1min

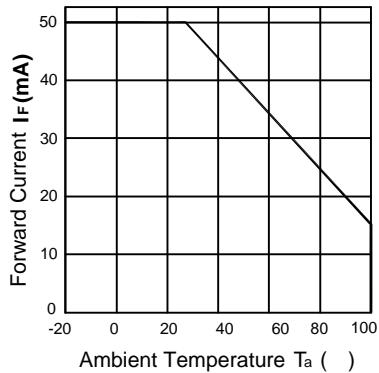
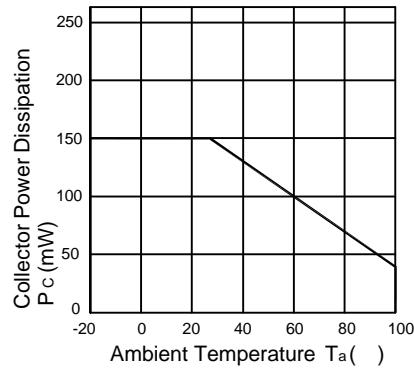
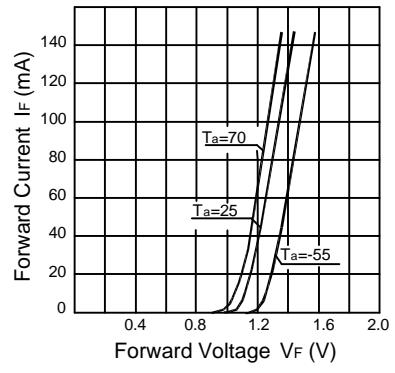
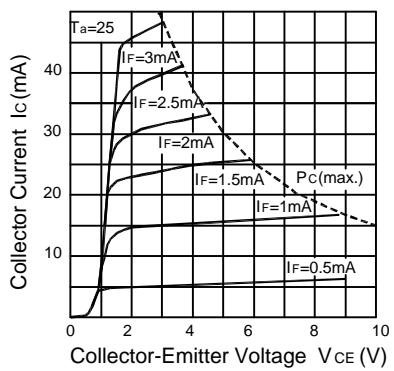
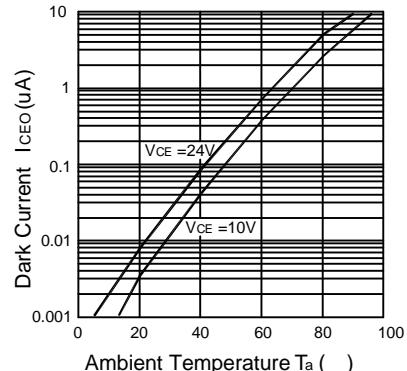
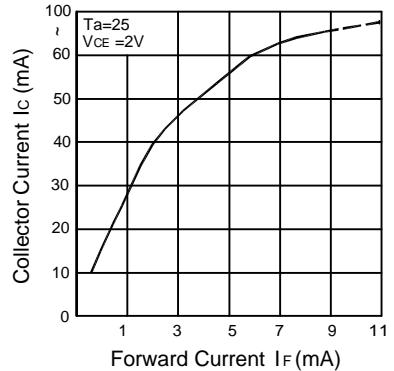
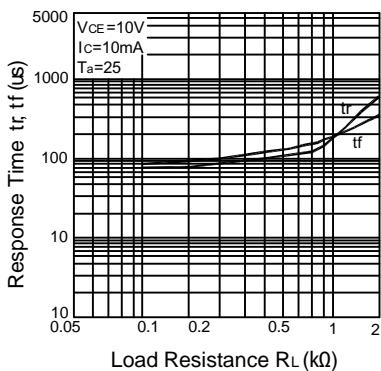
*3. 1/16 inch form case for 10sec

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 , unless otherwise noted)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit.
Input	Forward Voltage	V _F	I _F =10mA	-	1.15	1.30 V
	Reverse Current	I _R	V _R =5V	-	-	10 μA
	Capacitance	C _T	V=0, f=1kHz	-	30	- pF
Output	Collector-Emitter Breakdown Voltage	BV _{CCEO}	I _C =0.5mA	30	-	- V
	Emitter-Collector Breakdown Voltage	BV _{ECEO}	I _E =0.1mA	5	-	- V
	Collector Dark Current	I _{CEO}	I _F =0, V _{CE} =10V	-	-	100 nA
	Capacitance	C _{CE}	V _{CE} =0, f=1kHz	-	10	- pF
Coupled	Current Transfer Ratio ^{*4}	CTR	I _F =1mA, V _{CE} =2V	300	-	600 %
	Collector-Emitter Saturation Voltage	V _{CE(SAT)}	I _F =1mA, I _C =2mA	-	0.85	1.0 V
	Input-Output Capacitance	C _{IO}	V=0, f=1kHz	-	1	- pF
	Input-Output Isolation Resistance	R _{IO}	RH=40~60%, V=500V	-	10 ¹¹	-
	Rise Time	tr	V _{CE} =10V, R _L =100	-	100	- μs
	Fall Time	tf		-	100	- μs

*4. CTR=(I_C/I_F) X 100 (%)

PC-18T1 • PC-18T2 • PC-18T4**Forward Current vs.
Ambient Temperature****Collector Power Dissipation vs.
Ambient Temperature****Forward Current vs.
Forward Voltage****Collector Current vs.
Collector-Emitter Voltage****Dark Current vs.
Ambient Temperature****Collector Current vs.
Forward Current****Response Time vs.
Load Resistance****Switching Time Test Circuit**