


POWER TRANSFORMER

14A-56-20 (F) SERIES


1. CONFIGURATION & DIMENSIONS :

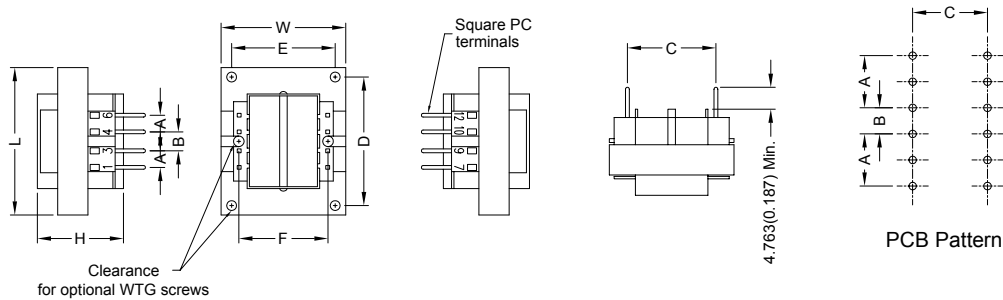

UNIT : mm (inch)

VA	gram	L	W	H	A	B	C	D	E	F	Dim Pin
56.0	771.11	76.20	64.00	47.20	15.24	7.62	48.26	63.50	50.80	-	1.14 SQ
-	-	(3.000)	(2.520)	(1.858)	(0.600)	(0.300)	(1.900)	(2.500)	(2.000)	-	(0.045)SQ

2. SCHEMATIC :



3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

a. Primary Voltage	AC 115/230 V 50/60 Hz .
b. No Load Primary Current	Less Than 75mA .
Input AC 115V 60Hz .	Less Than 85mA .
Input AC 230V 50Hz .	Series AC 23.20V . C.T.
c. Secondary Voltage (±5%)	Parallel AC 11.60V .
d. Secondary Load Current	Series 2800mA .
	Parallel 5600mA .
e. Full Load Primary Current	Less Than 290mA .
Input AC 115V 60Hz .	Less Than 540mA .
Input AC 230V 50Hz .	Series 20.00V . C.T.
f. Full Load Secondary Voltage (±5%)	Parallel 10.00V .
g. DC Resistance	Primary = 24 Ohm .
Pin 1-3	= 29 Ohm .
Pin 4-6	Secondary = - Ohm .
Pin 7-9	= - Ohm .
Pin 10-12	
h. Insulation Resistance	DC 500V 100Meg Ohm Of More .
i. Withstand Voltage (Hi-Pot)	AC 3750V 50Hz 1 Minutes .
j. Temperature Rise	Less Than 75 Deg C .
k. Core Size	EI-76 x 20.00 m/m .



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

25.02.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1