Crystal Oscillator



Model Name 7311S-GG Simple Packaged Crystal Oscillator (SPXO) 7300 Series

■ Main Application

For SONET-, SDH-, and GbEthernet-related equipment

■ Features

- Power supply voltage and LVDS output level are 2.5 V and 62.5 to 220 MHz, respectively.
- Ultra-compact with dimensions of 7.0 x 5.0 x 1.7 mm.
- A surface-mount crystal oscillator.








■ Specifications

	Model	7311S-GG-XXXX
Item	Classification	XXXX : 255R, 505X, 104X
Standard nominal frequency (MHz)		106.25, 125, 155.252, 156.25, 161.1328, 187.5, 212.5
Power supply voltage		+2.5V DC ±5%
Load		100Ω (Pad #4-#5)
Operating temperature range		0 to 70°C, 0 to 85°C
Comprehensive frequency stability		±25×10-6max / 0 to 70°C (255R)
		±50×10 ⁻⁶ max / 0 to 85°C (505X)
		±100×10 ⁻⁶ max / 0 to 85°C (104X)
Consumption current	During operation	43mA typ. (60mA max)
	During standby	30μA max.
Output level		LVDS level (Complementary)
Duty cycle		45 to 55% (at Waveform)
Phase jitter (1σ)		1ps max. (12KHz to 20MHz)
Standby function (tristate)		Available

■ Dimensions

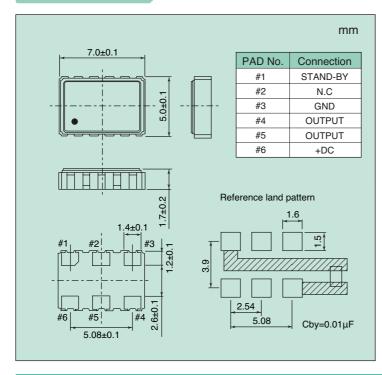


■ Standby Function Table (Tristate)

#1 Input	#4 and #5 output
Level H (V _{IH} ≥ 0.7 V _{cc})	Oscillation output ON
or OPEN is selected.	
Level L (V _{IL} ≤ 0.3 V _{cc})	High impedance

■ Number for specifying an order (+2.5V LVDS)

Comprehensive	Nominal frequency range (MHz)
frequency stability	62.5 ≤ F < 220
±25×10 ⁻⁶ max/0 to 70°C	NSA3344D
±50×10 ⁻⁶ max/0 to 85°C	NSA3345D
±100×10 ⁻⁶ max/0 to 85°C	NSA3346D

■ How to Specify an Order



When ordering +2.5V, ±100×10⁻⁶max/0 to 85°C, 125MHz 7311S-GG-104X-125.000000M-NSA3346D

If you have any queries concerning our standard frequencies and numbers for specifying orders, please contact our sales representatives or visit our homepage (http://www.ndk.com/).