

DIRECTIONAL COUPLERS

For RF Applications in Amplifiers and Signal Monitor Points



- ⊕ Operating bandwidth of 5 MHz to 900 MHz
- ⊕ Extended temperature: -40°C to +85°C
- ⊕ 235°C peak IR reflow temperature rating
- ⊕ Low cost


Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C

Part Number	Frequency (MHz)	Z (Ω)	Coupling		Mainline Loss		Isolation (dB MIN)	VSWR		Termination (Pin 4 to GND.)
			Nom. (dB)	Flatness (dB MAX)	TYP (dB)	MAX (dB)		TYP (:1)	MAX (:1)	
A5807	5 - 900	75	10 ±0.5	0.8	1.1	1.9	18	1.2	1.6	Internal
A5808	5 - 900	75	7.5 ±0.5	0.8	1.6	2.5	18	1.4	1.6	Internal
A5809	5 - 900	75	12 ±0.5	0.8	0.9	1.4	18	1.2	1.6	Internal
A5816	5 - 900	75	16 ±0.5	0.8	0.8	1.4	18	1.2	1.6	Internal
A5908	5 - 900	75	7.5 ±0.5	0.8	1.6	2.5	18	1.4	1.6	*External
A5910	5 - 900	75	10 ±0.5	0.8	1.1	1.9	18	1.2	1.6	*External
A5912	5 - 900	75	12 ±0.5	0.8	0.9	1.4	18	1.2	1.6	*External
A5916	5 - 900	75	16 ±0.5	0.8	0.8	1.4	18	1.2	1.6	*External

* A59XX series shall be terminated with a 91 Ω from Pin 4 to Ground to achieve listed performance.

Mechanical

A5XXX

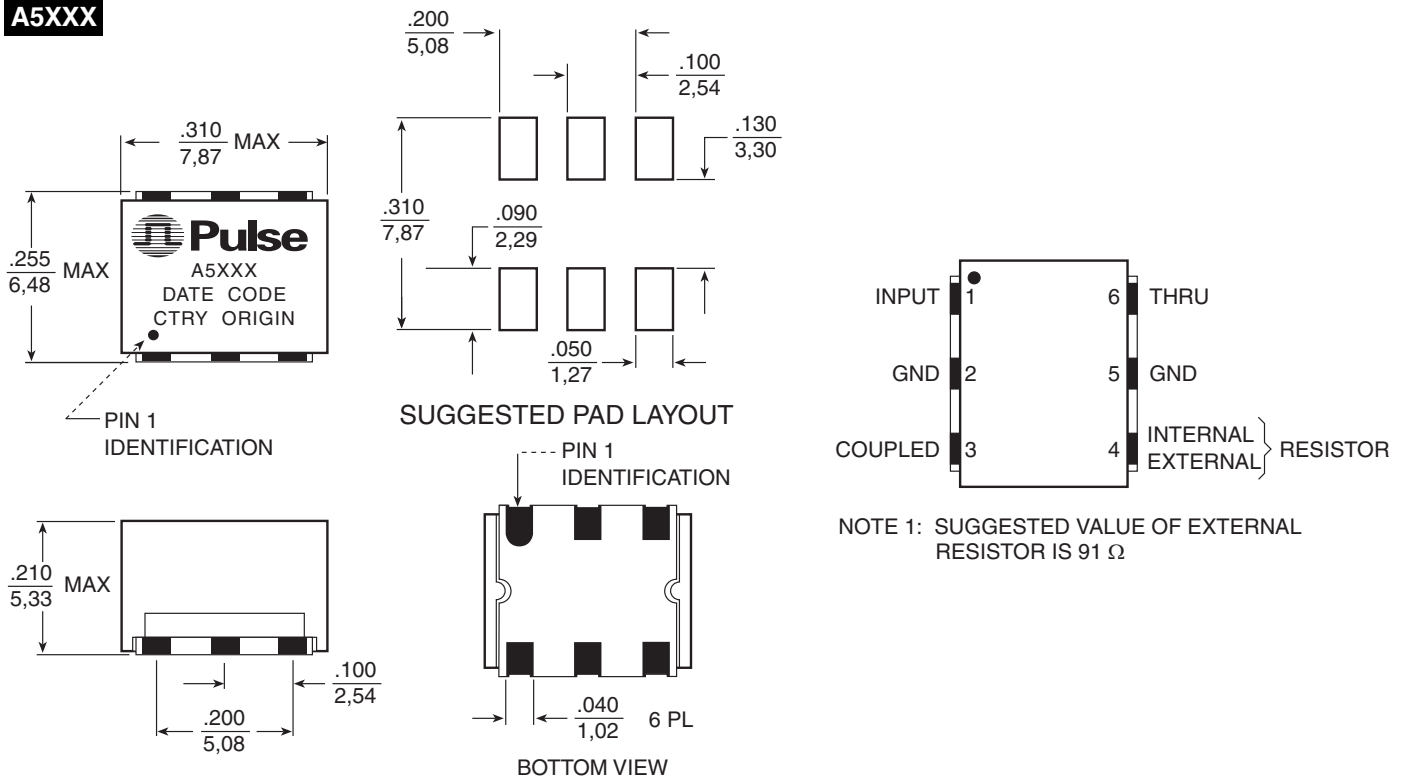

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are $\pm \frac{.005}{0,13}$






Weight 0.35 grams
Tape & Reel850/reel

DIRECTIONAL COUPLERS

For RF Applications in Amplifiers and Signal Monitor Points



Typical S-Parameters

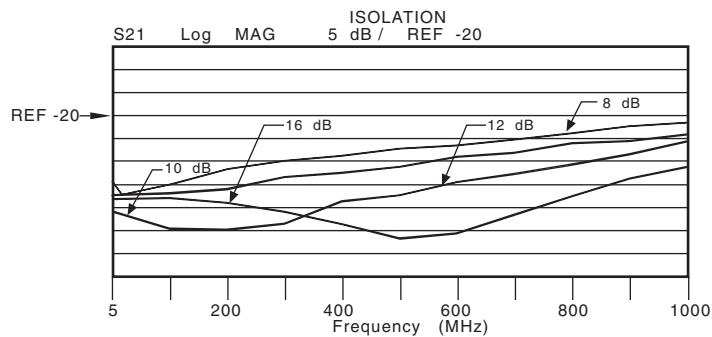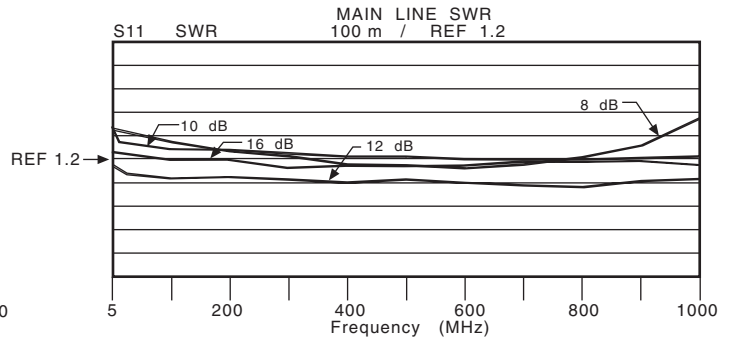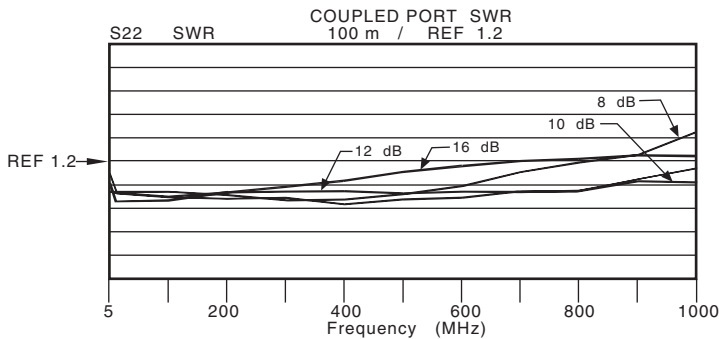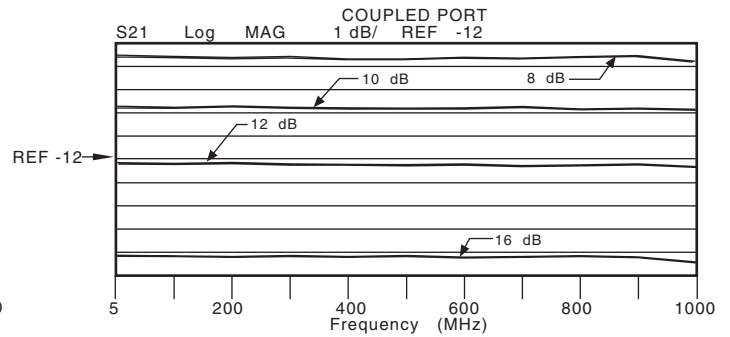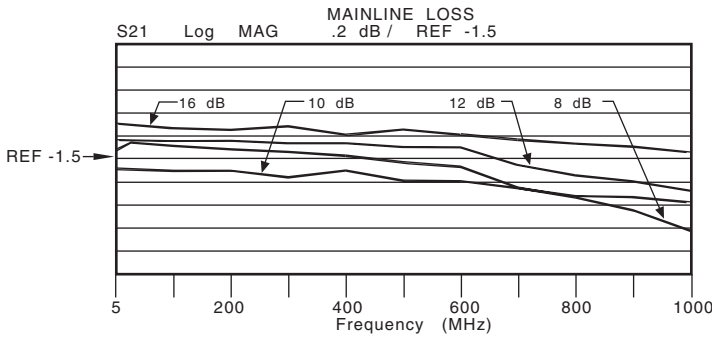

For More Information :

UNITED STATES (Worldwide)

12220 World Trade Drive
San Diego, CA 92128
Quick-Facts: 619 674 9672
<http://www.pulseeng.com>
TEL: 858 674 8100
FAX: 858 674 8262

UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road
The Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

FRANCE (Southern Europe)

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

SINGAPORE (Southern Asia)

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 287 8998
FAX: 65 280 0080

TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1
HsinTai Wu Road
Hsi-Chih, Taipei Hsien
Taiwan, R.O.C.
Tel: 886 2 2698 0228
FAX: 886 2 2698 0948

DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

♻️ Printed on recycled paper. ©1999, Pulse Engineering, Inc.