

ECONOLINE - DC/DC-Converter

RB Series, 1 Watt, SIP7 (Single & Dual Output)

RECOM

Features

- Dual Output from a Single Input Rail
- Industry Standard Pinout
- 1kVDC & 2kVDC Isolation
- Custom Solutions Available
- UL94V-0 Package Material
- Efficiency to 80%




Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)
SIP 7 (2kV)				
RB-XX1.8S (H)	1.8, 3.3, 5, 9, 12, 15, 24	1.8	555	70
RB-XX3.3S (H)	1.8, 3.3, 5, 9, 12, 15, 24	3.3	303	75
RB-XX05S (H)	1.8, 3.3, 5, 9, 12, 15, 24	5	200	70-78
RB-XX09S (H)	1.8, 3.3, 5, 9, 12, 15, 24	9	111	70-78
RB-XX12S (H)	1.8, 3.3, 5, 9, 12, 15, 24	12	84	78-82
RB-XX15S (H)	1.8, 3.3, 5, 9, 12, 15, 24	15	66	80-84
RB-XX24S (H)	1.8, 3.3, 5, 9, 12, 15, 24	24	42	74-85
RB-XX1.8D (H)	1.8, 3.3, 5, 9, 12, 15, 24	±1.8	±278	70
RB-XX3.3D (H)	1.8, 3.3, 5, 9, 12, 15, 24	±3.3	±152	70
RB-XX05D (H)	1.8, 3.3, 5, 9, 12, 15, 24	±5	±100	70-78
RB-XX09D (H)	1.8, 3.3, 5, 9, 12, 15, 24	±9	±56	75-80
RB-XX12D (H)	1.8, 3.3, 5, 9, 12, 15, 24	±12	±42	78-84
RB-XX15D (H)	1.8, 3.3, 5, 9, 12, 15, 24	±15	±33	80-84
RB-XX24D (H)	1.8, 3.3, 5, 9, 12, 15, 24	±24	±21	80-84

Specifications (Core Operating Area) and Operating Temperature / Derating-Graph

Input Voltage	±10%	
Input Filter	Capacitor Type	
Output Voltage Accuracy	±5%	
Line Voltage Regulation	1,2%/1% V Input	
Load Voltage Regulation (10% to 100% full load)	1.8V, 3.3V output types	20% max.
	5V output type	15% max.
	9V, 12V, 15V, 24V output types	10% max.
Ripple and Noise (20MHz limited)	Single output types	100mVp-p max.
	Dual output types	±75mVp-p max.
Efficiency at Full Load	70% min.	
Isolation Voltage	1.000VDC min. (also available with 2.000VDC, Suffix „H“)	
Isolation Resistance (Viso = 500VDC)	10 GΩ min.	
Isolation Capacitance	20pF min./75pF max.	
Short Circuit Protection	1 Second	
Switching Frequency at Full Load	100kHz typ.	
Operating Temperature	-40°C to +85°C (see Graph)	
Storage Temperature	-55°C to +125°C	
Package Weight	Single output types	2.2g

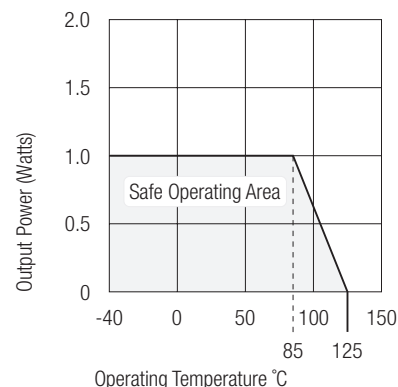






ECONOLINE - DC/DC-Converter

RB Series, 1 Watt, SIP7 (Single & Dual Output)

RECOM

Package Style and Pinning (mm)

8 PIN DIP Package




Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
4	NC	-Vout
5	-Vout	Com
6	+Vout	+Vout

NC = No Connection

Recommended Footprint Details



XX.X ± 0.5 mm
XX.XX ± 0.25 mm