


PULSEJACK™

Surface Mount 1X1



Description:

10/100/ Base-TX surface mount RJ45 single port (1X1) Tab-UP/DOWN with or without LEDs integrated magnetics connector (ICM), designed to support applications, such as Set Top Box and Network Interface Cards (NIC).

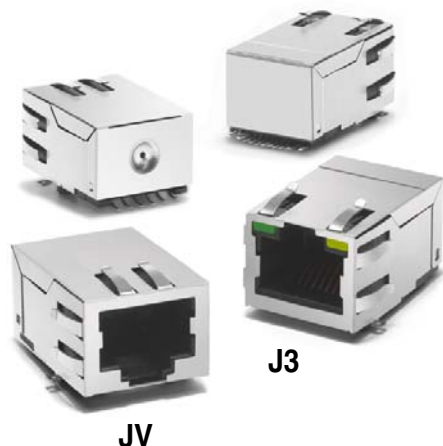

Features and Benefits:

- ⦿ Available in Tape & Reel format
- ⦿ J3 SMT product available with or without LEDs
- ⦿ Suitable for CAT 5 or 6 Fast Ethernet cable
- ⦿ Internal magnetics are 100% electrically tested for HI-POT and continuity

Electrical Performance Summary:

- ⦿ Internal magnetics options available
- ⦿ Meets or exceeds IEEE 802.3ab standard for 1000Base-T
- ⦿ High performance for maximum EMI suppression
- ⦿ Minimum 1500 Vrms isolation per IEEE 802.3 requirement

Electrical Specifications @ 25°C — Operating Temperature 0°C to +70°C

Part Number*	Turns ^{1,2} Ratios		Tab Option	LEDs ³	Insertion Loss TX/RX (dB MAX)	Return Loss (dB MIN) 100 Ω (±15 Ω)			Crosstalk (dB MIN)			Common Mode Rejection (dB MIN)		Hipot (MIN)
	TX	RX				1-10 MHz	30 MHz	60-80 MHz	1-10 MHz	30-60 MHz	60-100 MHz	1-50 MHz	50-130 MHz	
JV006I21	1CT:1	1CT:1	DOWN	—	-1.0	-20	-16	-12	-40	-35	-30	-30	-20	1500 Vrms
JV011I21	1CT:1CT	1CT:1CT	DOWN	—	-1.0	-20	-16	-12	-40	-35	-30	-30	-20	1500 Vrms
JV026I21	1CTS:1CT	1CT:1CT	DOWN	—	-1.0	-20	-16	-12	-40	-35	-30	-30	-20	1500 Vrms
J3006G21D	1CT:1	1CT:1	UP	G/Y	-1.0	-20	-16	-12	-40	-35	-30	-30	-20	1500 Vrms
J3011G21D	1CT:1	1CT:1CT	UP	G/Y	-1.0	-20	-16	-12	-40	-35	-30	-30	-20	1500 Vrms
J3018G21K	1CTS:1.414	1CT:1CT	UP	G/G	-1.0	-20	-16	-11.5	-40	-35	-30	-30	-20	1500 Vrm
J3026G21D	1CTS:1	1CT:1CT	UP	G/Y	-1.0	-20	-16	-12	-40	-35	-30	-30	-20	1500 Vrms

NOTES:

- Both transmit and receive channels meet IEEE 802.3 specifications.
- Different electrical and mechanical specifications can be accommodated. Contact Pulse Applications Engineering.
- LEDs Left/Right: **G** = green; **Y** = yellow; **—** = none. Other LED options available by request.
- Optional Tape & Reel packaging can be ordered by adding a **"T"** suffix to the surface mount part numbers (eg: JVXXXI21T or J3XXXGX1T).

RJ45 Durability Testing Rating

Part Number	Mating Force (MAX)	Unmating Force (MAX)	Durability	Plug to Jack Retention (MIN)
JV/J3 Series	5 lbs./2.268 kgs.	5 lbs./2.268 kgs.	750 Insertions	20 lbs./9.072 kgs.

RJ45 Material Specification


Part Number	Shield		Contact			Housing	
	Material	Finish	Material	Plating Area	Solder Area	Material	Specification
JV/J3 Series	Brass	10-20μ inches thick nickel over 10-20μ inches thick nickel	Phosphor Bronze	30μ inches gold over 30-80μ inches nickel	75-300μ inches tin-lead over 30-80μ inches nickel	High Temp. Thermoplastic	UL 94 V-0

Notes:


- All connector part numbers starting with the series prefix JV or J3 comply to the above limits.
- Connector dimensions comply with FCC dimension requirements.

JV Platform Schematics


JV006

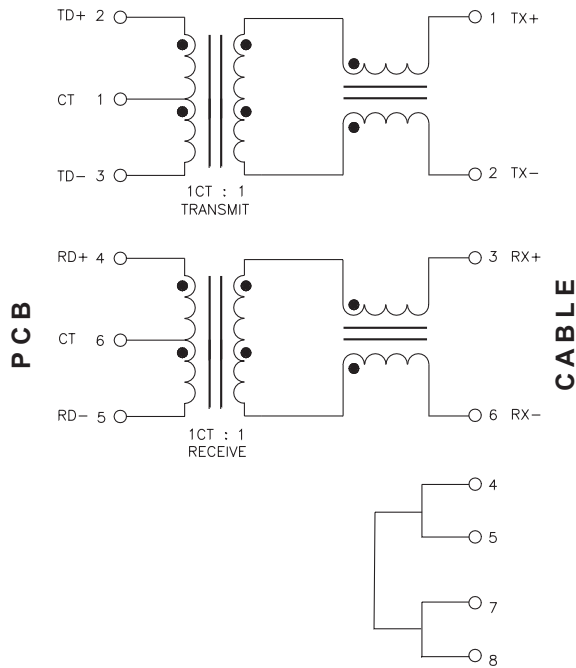

JV011

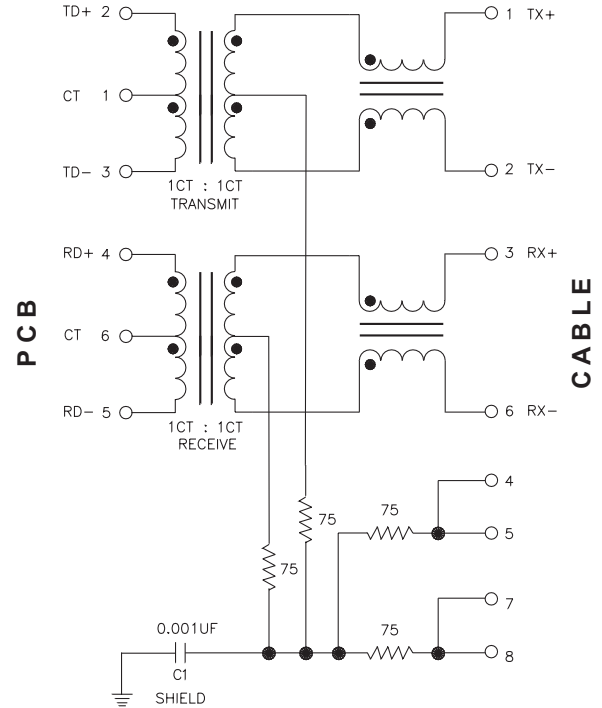


JV026

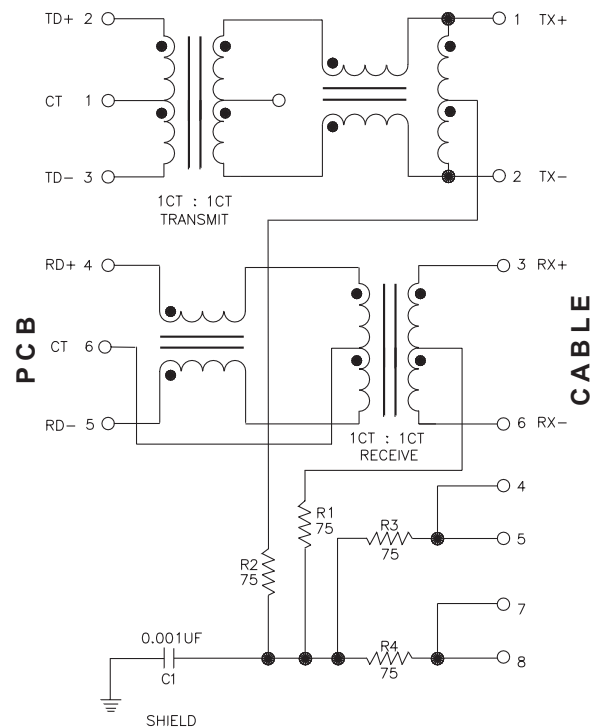


J3 Platform Schematics


J3006

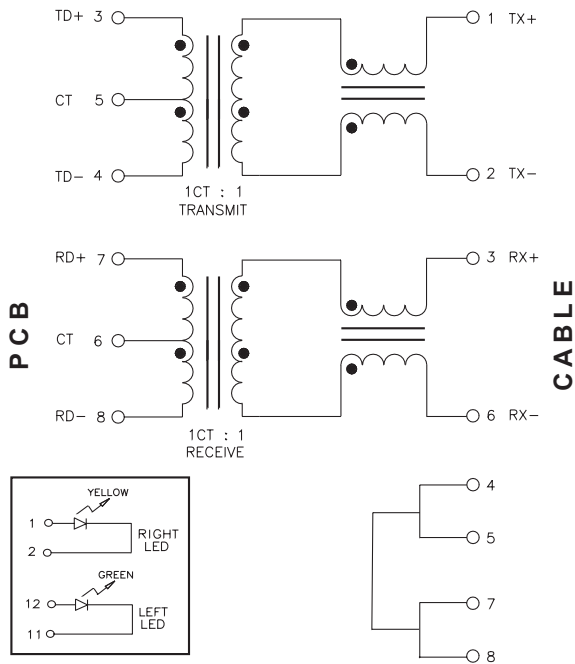




J3011

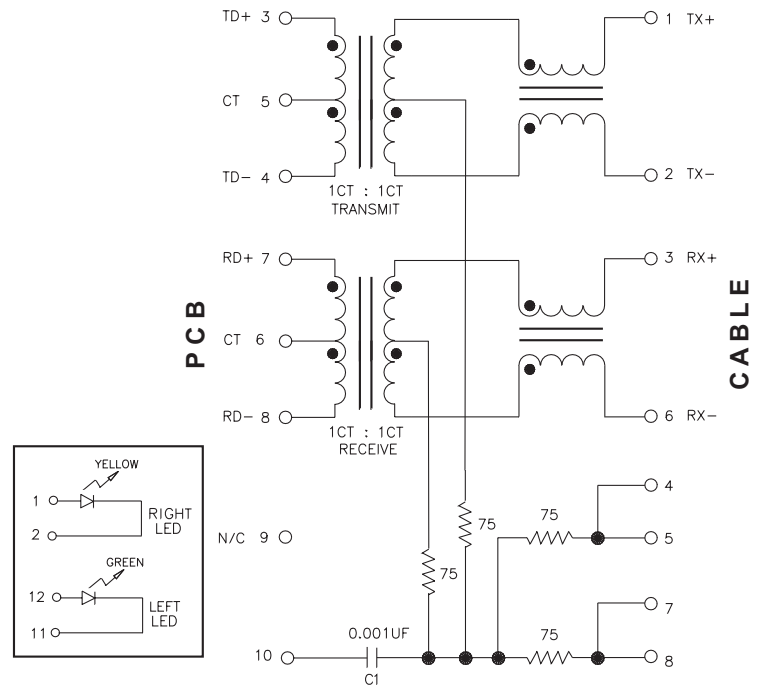

J3018/J3026

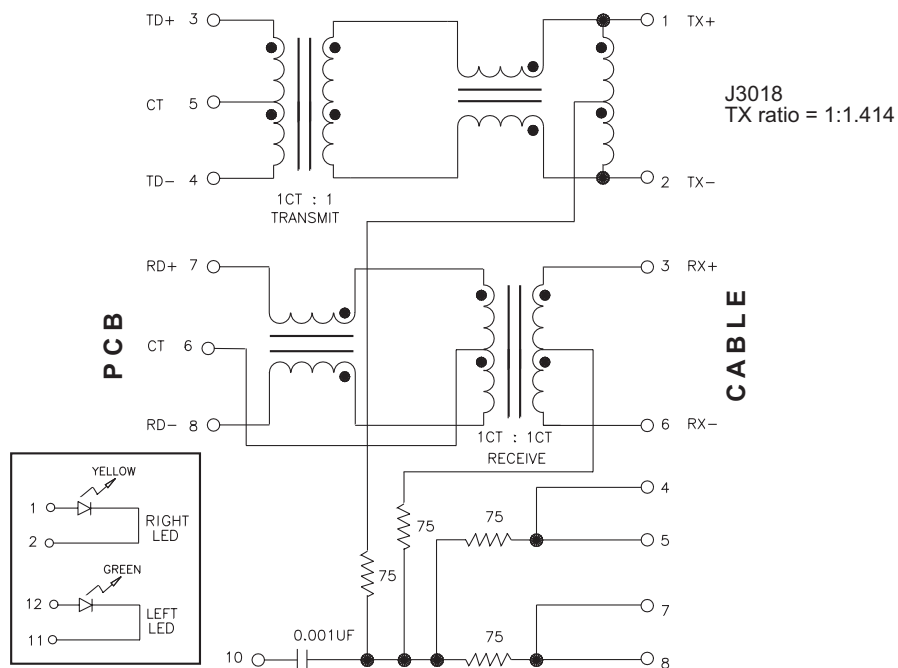

JV Series

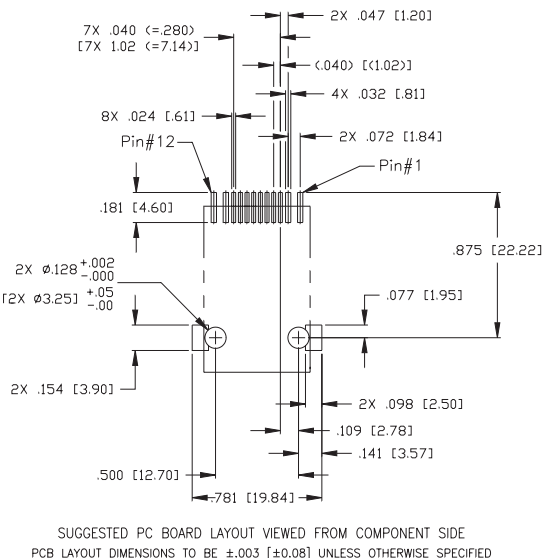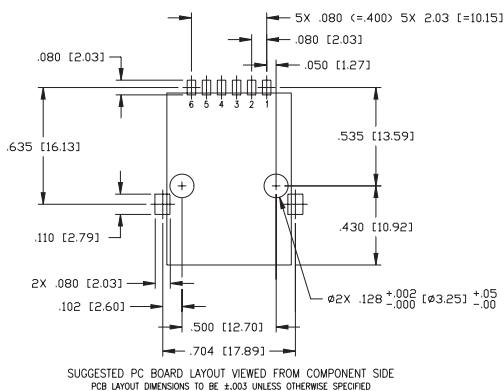

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0.25}$

JV series	J3 series
6.6 grams	8.1 grams
175/reel	75/reel
40/tray	40/tray
44x32mm	56x32mm

PRELIMINARY J409.P (11/02)