

## LO566NPG4-70G-A

### Features

All Plastic Mold Type  
 High Luminous Intensity  
 Low Current Requirement  
 Tinted Diffused Lens  
 Wide Viewing Angle Up To 70° x 45°


### Applications

Backlighting  
 Full Color/RGB Video Signs  
 Time/Temperature Boards  
 VMS



## ATTENTION

OBSERVE PRECAUTIONS  
 ELECTROSTATIC  
 SENSITIVE DEVICES

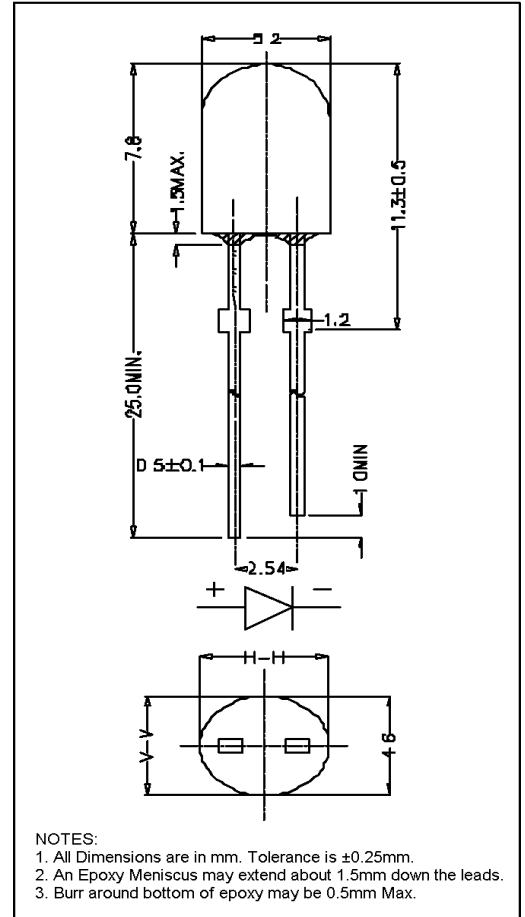

### Maximum Ratings (Ta=25°C)

Characteristic	Symbol	Max.	Unit
Forward Current	$I_F$	25	mA
Reverse Voltage	$V_R$	5.00	V
Power Dissipation	$P_D$	105.00	mW
Operating Temperature	$T_{opr}$	-40 ~ +95	°C
Storage Temperature	$T_{stg}$	-40 ~ +100	°C
Soldering Temperature	$T_{sol}$	260	°C
Soldering Time	-	for 3 sec. max	-

### Opto-Electrical Characteristics (Ta=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage	$V_F$	$I_F=20\text{mA}$	--	3.60	4.20	V
Reverse Current	$I_R$	$V_R=5\text{V}$	-	-	100	$\mu\text{A}$
Luminous Intensity	$I_v$	$I_F=20\text{mA}$	550.0	1000.00	-	mcd
Viewing Angle	$2\theta^{1/2}$	-	-	70° x 40°	-	deg.
Peak Wavelength	$\lambda_p$	$I_F=20\text{mA}$	-	520	-	nm
Dominant Wavelength	$\lambda_d$	$I_F=20\text{mA}$	-	525	-	nm
Spectral Line Half Width	$\Delta\lambda$	$I_F=20\text{mA}$	-	38	-	nm

**Company Headquarters**  
 120 Broadway  
 Menands, New York 12204  
 Toll Free: 800.984.5337  
 Fax: 518.432.7454



Web: [www.marktechopto.com](http://www.marktechopto.com) | Email: [info@marktechopto.com](mailto:info@marktechopto.com)

**West Coast Sales Office**  
 950 South Coast Drive, Suite 265  
 Costa Mesa, California 92626  
 Toll Free: 800.984.5337  
 Fax: 714.850.9314

## LO566NPG4-70G-A Graphs

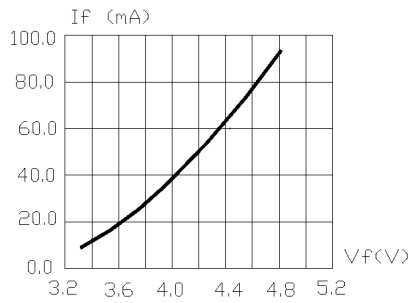


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

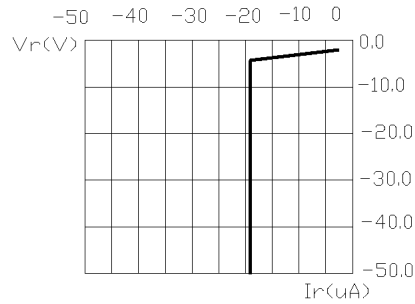


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.

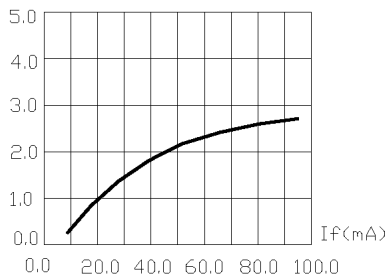


FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT.

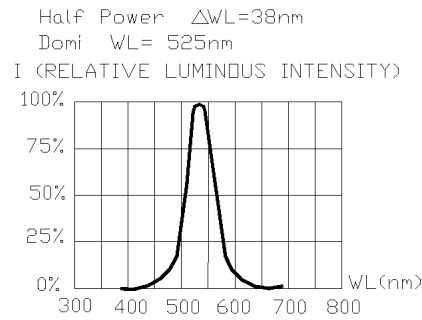


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

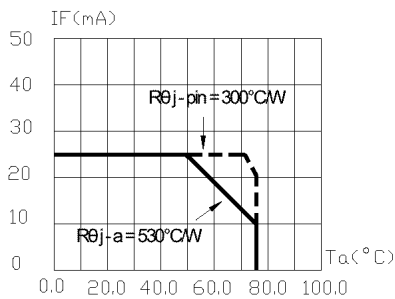


FIG.5 MAXIMUM FORWARD DC CURRENT VS. AMBIENT TEMPERATURE ( $T_{jmax}=95^{\circ}C$ )

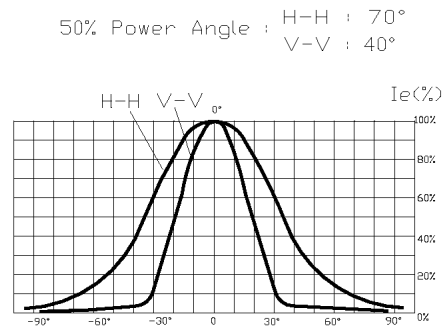


FIG.6 FAR FIELD PATTERN

1. Cathode PAD Area ( $0.18 \times 0.18 \text{inch}^2$ )
2. Height above nominal seating plane in inches(0.3inch)