

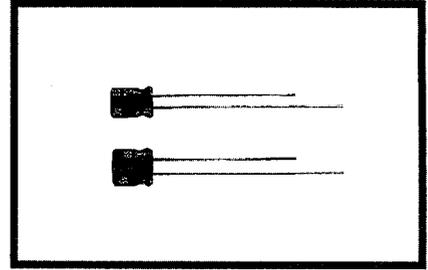


ALUMINUM ELECTROLYTIC CAPACITORS

MA series 5mmL, Standard, For General Purposes

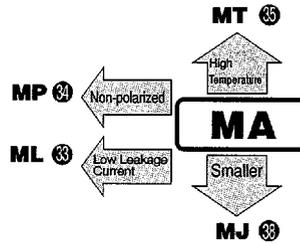


- Standard ultra-miniature series with 5mm height.

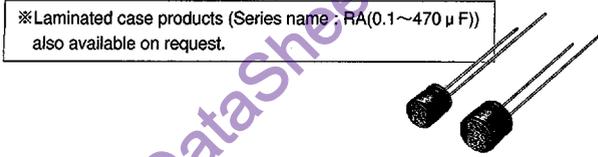


Specifications

Item	Performance Characteristics																							
Operating Temperature Range	-40~+85°C																							
Voltage Range	4~50V																							
Capacitance Range	0.1~470 μF																							
Capacitance Tolerance	±20% at 120Hz, 20°C																							
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.																							
tan δ	Measurement frequency : 120Hz, Temperature : 20°C																							
	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td rowspan="2">Figures in () are for MR series.</td> </tr> <tr> <td>tan δ (MAX.)</td> <td>0.35</td> <td>0.24 (0.30)</td> <td>0.20 (0.24)</td> <td>0.16 (0.20)</td> <td>0.14 (0.18)</td> <td>0.12 (0.16)</td> <td>0.10 (0.13)</td> </tr> </table>	Rated voltage (V)	4	6.3	10	16	25	35	50	Figures in () are for MR series.	tan δ (MAX.)	0.35	0.24 (0.30)	0.20 (0.24)	0.16 (0.20)	0.14 (0.18)	0.12 (0.16)	0.10 (0.13)						
Rated voltage (V)	4	6.3	10	16	25	35	50	Figures in () are for MR series.																
tan δ (MAX.)	0.35	0.24 (0.30)	0.20 (0.24)	0.16 (0.20)	0.14 (0.18)	0.12 (0.16)	0.10 (0.13)																	
Stability at Low Temperature	Measurement frequency : 120Hz																							
	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Impedance ratio Z-25°C/Z+20°C</td> <td>7</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>ZT/Z20 (MAX.)</td> <td>15</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table>	Rated voltage (V)	4	6.3	10	16	25	35	50	Impedance ratio Z-25°C/Z+20°C	7	4	3	2	2	2	2	ZT/Z20 (MAX.)	15	8	6	4	4	3
Rated voltage (V)	4	6.3	10	16	25	35	50																	
Impedance ratio Z-25°C/Z+20°C	7	4	3	2	2	2	2																	
ZT/Z20 (MAX.)	15	8	6	4	4	3	3																	
Load Life	After 1000 hours' application of rated voltage at 85°C, capacitors meet the characteristics requirements listed at right.																							
	Capacitance change	Within ±20% of initial value (MR series & φ3 product : Within ±25%)																						
	tan δ	200% or less of initial specified value																						
Shelf Life	After leaving capacitors under no load at 85°C for 1000 hours, they meet the specified value for load life characteristics listed above.																							
	Leakage current	Initial specified value or less																						
Marking	Printed with white color letter on black sleeve.																							
Applicable Standards	JIS C-5141 and JIS C-5102.																							

Radial Lead Type

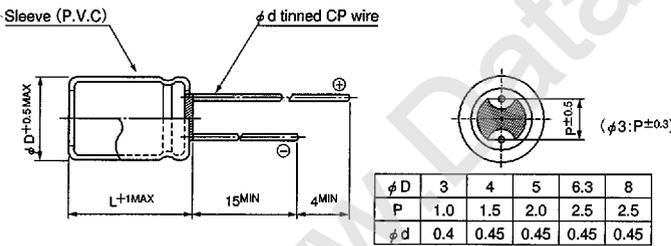

Type numbering system (Example : 25V 10 μF)

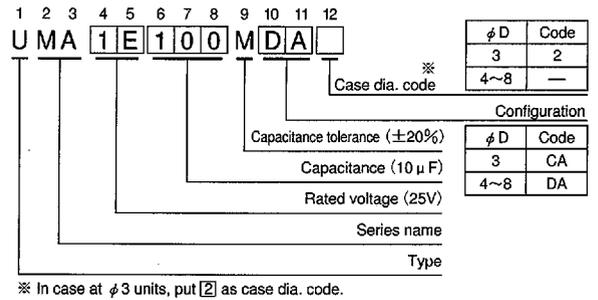

Dimensions

Cap.(μF)	V	DXL(mm)							
		4	6.3	10	16	25	35	50	
Code		0G	0J	1A	1C	1E	1V	1H	
0.1	0R1							4X5 (3X5) 1.0 (1.0)	
0.22	R22							4X5 (3X5) 2.0 (2.0)	
0.33	R33							4X5 (3X5) 2.8 (2.8)	
0.47	R47							4X5 (3X5) 4.0 (4.0)	
1	010							4X5 (3X5) 8.4 (8.0)	
2.2	2R2						3X5	8.4	
3.3	3R3						3X5	10	
4.7	4R7						3X5	10	
10	100		3X5	15			4X5	23(18)	
22	220	3X5	19	4X5	26(21)	5X5	33	5X5	
33	330	4X5	28	5X5	37	5X5	41	6.3X5	
47	470	4X5	33	5X5	45	6.3X5	52(43)	6.3X5	
100	101	5X5	56	6.3X5	70(68)	8X5	80(76)	8X5	
220	221	6.3X5	96	8X5	110(90)	8X5	135		
330	331	8X5	145	8X5	170				
470	471	8X5	185						

Size 3X5 is available for capacitors marked. "●"
 Size 5X5 is available for capacitors marked. "○"
 Size 6.3X5 is available for capacitors marked. "□"
 In such a case, [MR] will be put at 2nd and 3rd digit of type numbering system.
 Figures in () are for MR series.

Allowable Ripple(mA rms) at 85°C 120Hz