




RoHS 2002/95/EC Compliant

TECHNICAL DATA SHEET


Thermoelectric Cooler RC6-8

Performance Values

| | | |
|----------------------------------|------|------|
| Hot Side Temperature (°C) | 27°C | 50°C |
| Δ Tmax (°C-dry N ₂): | 65 | 73 |
| Qmax (watts): | 39 | 43 |
| I _{max} (amps): | 7.4 | 7.4 |
| V _{max} (vdc): | 8.2 | 9.2 |
| AC Resistance (ohms): | 0.9 | --- |

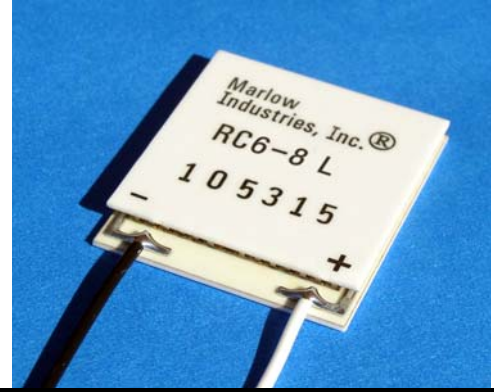

Mechanical Characteristics

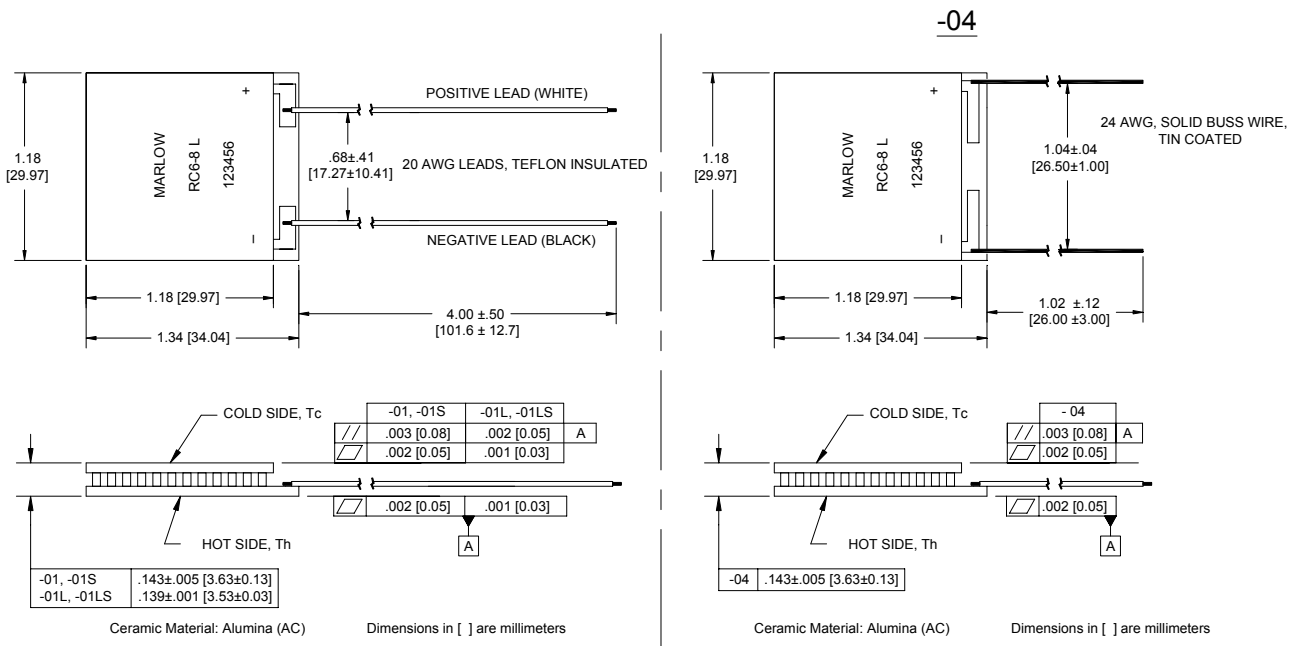

Ordering Options

| Model Number | Description |
|--------------|-------------------------|
| RC6-8-01 | Base Model w/ leads |
| RC6-8-01L | Lapped Model |
| RC6-8-01S | Sealed Model |
| RC6-8-01LS | Lapped and Sealed Model |
| RC6-8-04 | Base Model w/Buss Wire |

Features

- **RoHS 2002/95/EC compliant**
- Solid-state reliability.
- Built with high temperature solder with the ability to withstand higher assembly processing temperatures for short periods of time (<160°C).
- Superior nickel diffusion barriers on elements
- High strength for rugged environment.
- Porched configuration for enhanced leadwire strength
- RTV sealing available (Optional)
- Lapped option available for multiple module applications.




Performance Curves

Environment: One atmosphere dry nitrogen


Hot Side Temperature: 27°C

TA(C)= 27

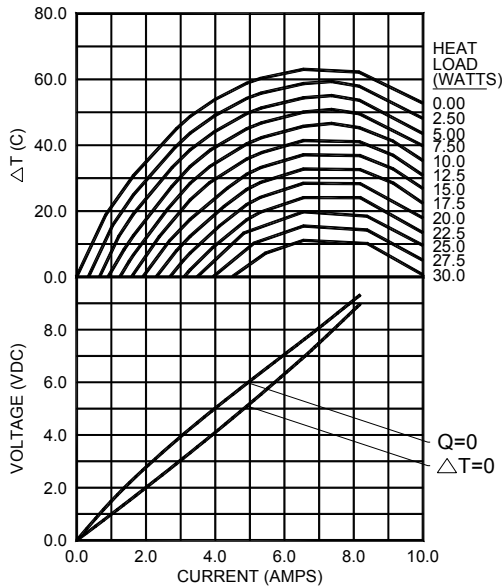

Hot Side Temperature: 50°C

TA(C)= 50

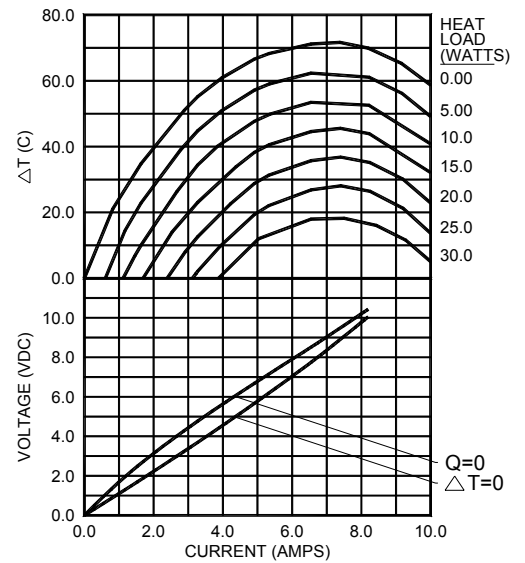

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, consult one of our Applications Engineers.

Installation

Recommended mounting methods: Bonding with thermal epoxy or soldering with metallized ceramics. For additional information, please refer to our TEC Installation Guide.

Operation Cautions

For maximum reliability, storage and operation below 85°C in a non-condensing environment is recommended. To minimize thermal stress, use linear/proportional temperature control or a similar method rather than an ON/OFF method.

Addresses

Marlow Industries, Inc.
 10451 Vista Park Road
 Dallas Texas 75238-1645
 214-340-4900 (tel)
 214-341-5212 (fax)

Marlow Industries Europe
 Aberdeen House, South Road
 Haywards Heath
 West Sussex RH164NG UK
 +44 (0)1444-443404 (tel)
 +44 (0)1444-443334(fax)

II-VI Japan Inc.
 WBG Marive East 17F
 2-6 Nakase, Mihama-ku
 Chiba-Shi, Chiba 261-7117
 Japan
 81 43 297 2693 (tel)
 81 43 297 3003 (fax)
 center@ii-vi.co.jp
 www.ii-vi.co.jp

II-VI Singapore Pte., Ltd.
 Blk. 5012, Techplace II
 #04-07 & 05-07/12, Ang Mo Kio Ave. 5
 Singapore 569876
 (65) 6481 8215 (phone)
 (65) 6481 8702 (fax)
 info@ii-vi.com.sg
 www.ii-vi.com.sg

Marlow Industries China, II-VI Technologies Beijing
 A subsidiary of II-VI Incorporated
 Rm 202, 1# Lize 2nd Middle Road
 Wangjing, Chaoyang District
 Beijing 100102 China
 64391260 ext 105 (tel)
 64399315 (fax)
 info@iivbj.com