

Silicon PNP Power Transistors

2SA1771

DESCRIPTION


- With TO-220F package
- Low collector saturation voltage
- High speed switching time

APPLICATIONS

- High current switching

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

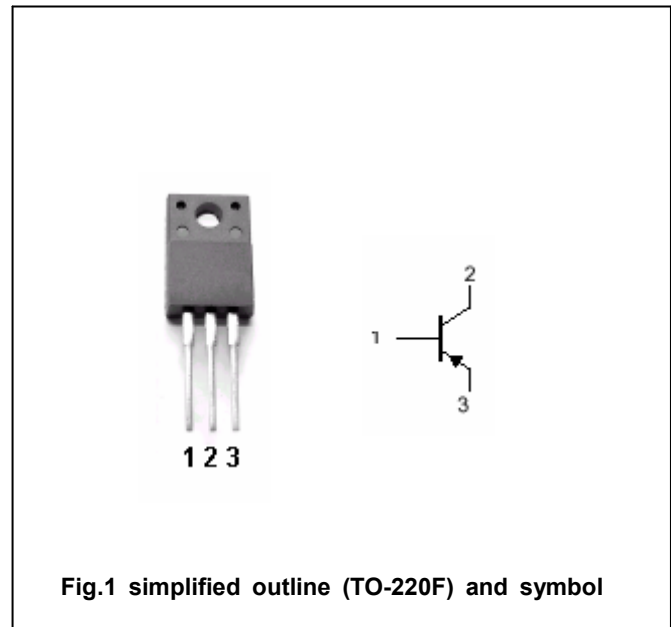

Absolute maximum ratings (Ta=25℃)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V _{CBO}	Collector-base voltage	Open emitter	-80	V
V _{CEO}	Collector-emitter voltage	Open base	-80	V
V _{EBO}	Emitter-base voltage	Open collector	-14	V
I _C	Collector current		-12	A
I _B	Base current		-1.2	A
P _C	Collector dissipation	T _C =25℃	30	W
T _j	Junction temperature		150	℃
T _{stg}	Storage temperature		-55~150	℃

Silicon PNP Power Transistors

2SA1771

CHARACTERISTICS

T_j=25 °C unless otherwise specified


SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _C =-50mA ; I _B =0	-80			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =-6A ; I _B =-0.3A			-0.4	V
V _{BEsat}	Base-emitter saturation voltage	I _C =-6A ; I _B =-0.3A			-1.2	V
I _{CBO}	Collector cut-off current	V _{CB} =-80V ; I _E =0			-10	μA
I _{EBO}	Emitter cut-off current	V _{EB} =-14V ; I _C =0			-10	μA
h _{FE-1}	DC current gain	I _C =-1A ; V _{CE} =-1V	100		320	
h _{FE-2}	DC current gain	I _C =-6A ; V _{CE} =-1V	40			
f _T	Transition frequency	I _C =-1A ; V _{CE} =-5V		50		MHz
C _{OB}	Collector output capacitance	f=1MHz ; V _{CB} =-10V		300		pF

t _{on}	Turn-on time	I _{B1} =-I _{B2} =-0.3A ; V _{CC} =-30V R _L =5Ω Duty cycle≤1%		0.2		μs
t _s	Storage time			0.6		μs
t _f	Fall time			0.1		μs

Silicon PNP Power Transistors

2SA1771

PACKAGE OUTLINE

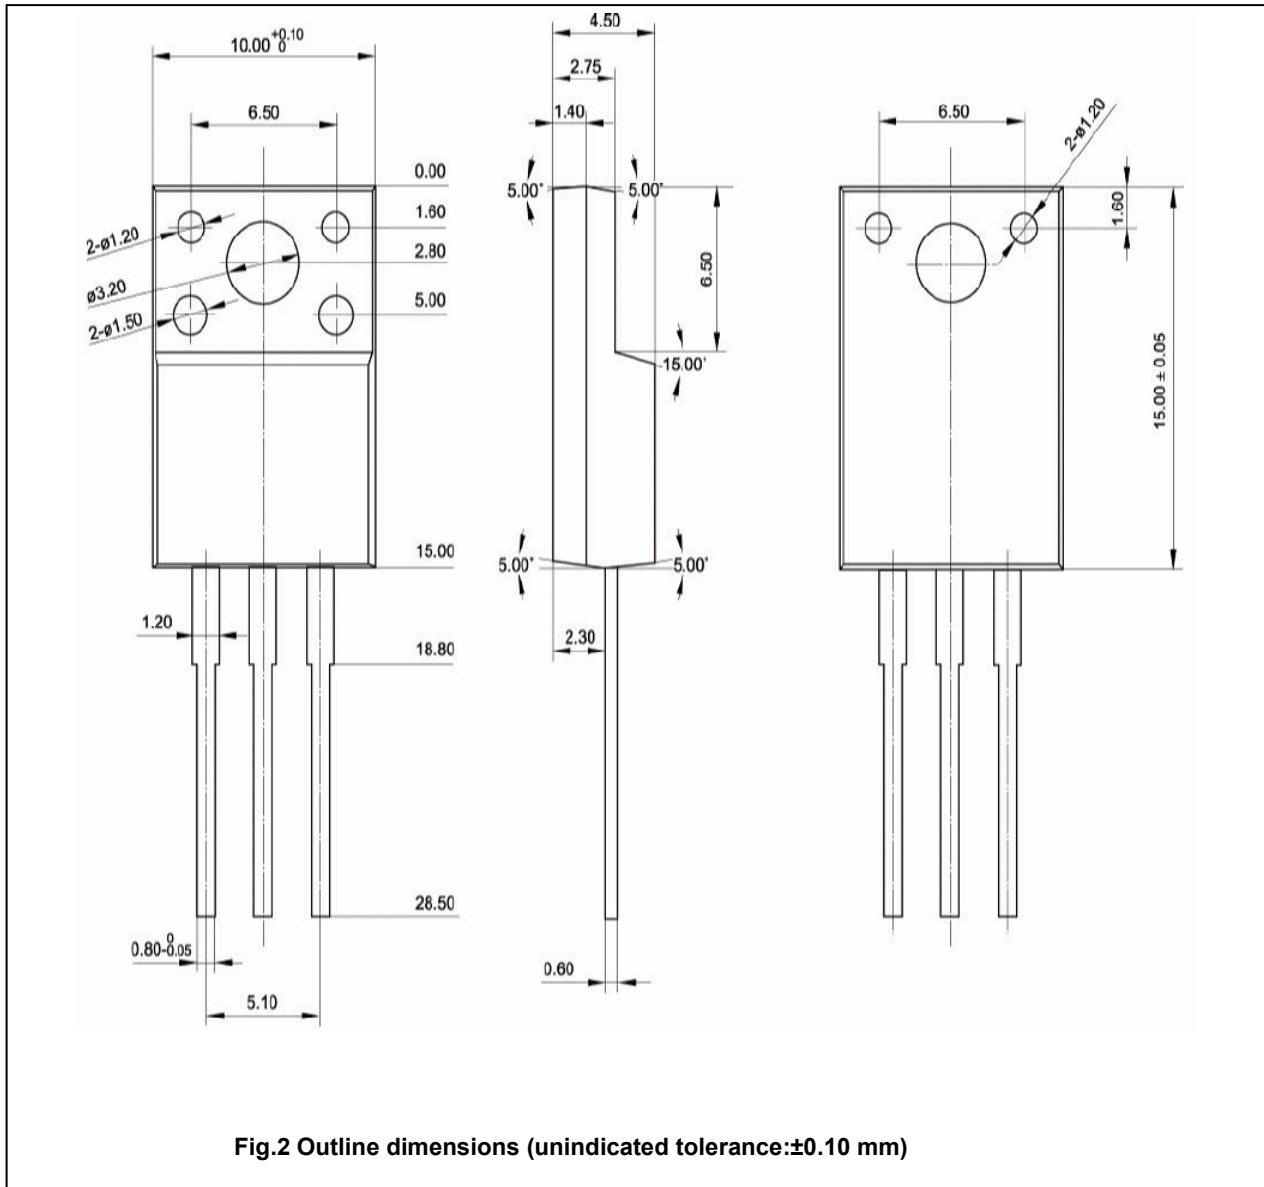

Silicon PNP Power Transistors

2SA1771

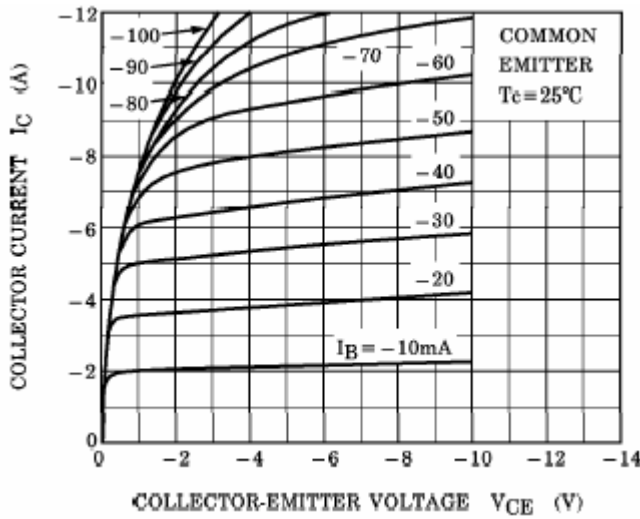


Fig.3 Static Characteristic

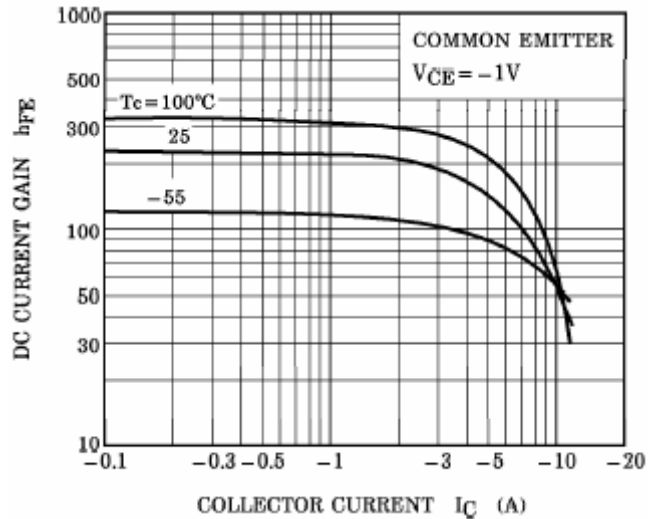


Fig.4 DC current Gain

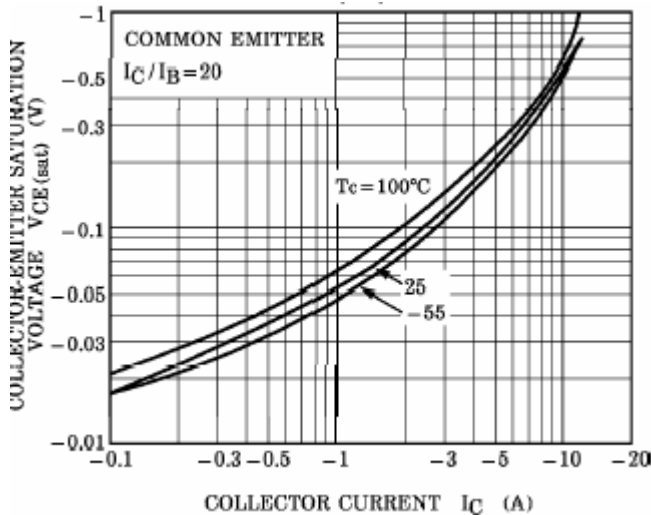


Fig.5 Collector-Emitter Saturation Voltage

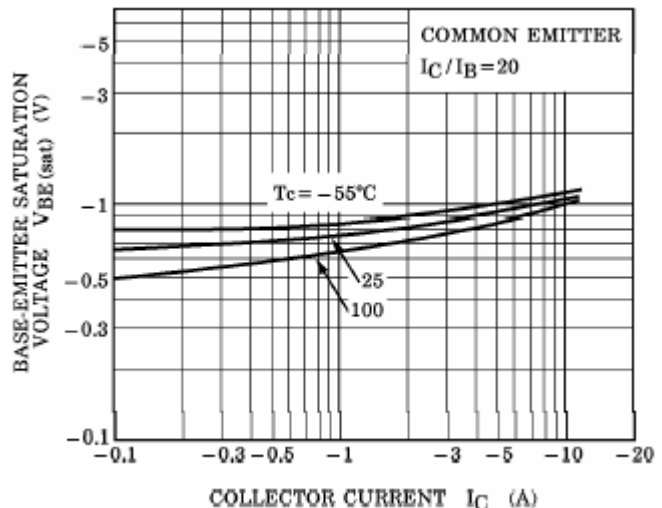


Fig.6 Base-Emitter Saturation Voltage

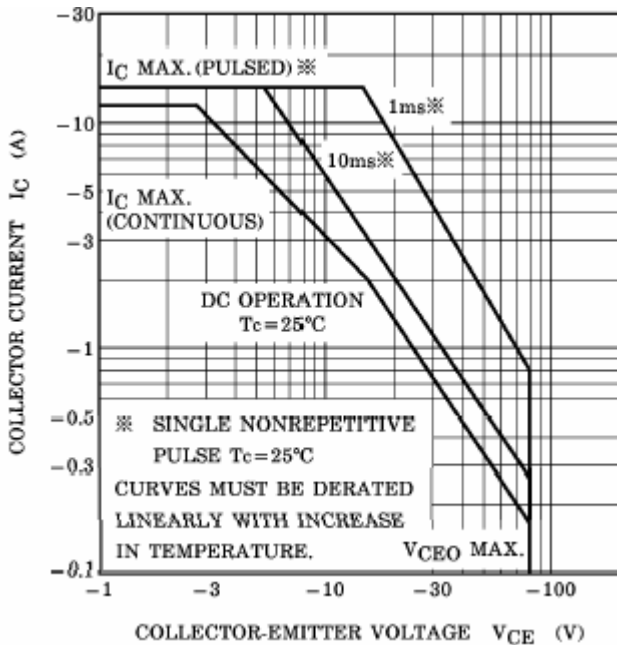


Fig.7 Safe Operating Area