


2mm SINGLE LED TOP VIEW CIRCUIT BOARD INDICATOR  
(SUBMINATURE SOLID STATE LAMPS)

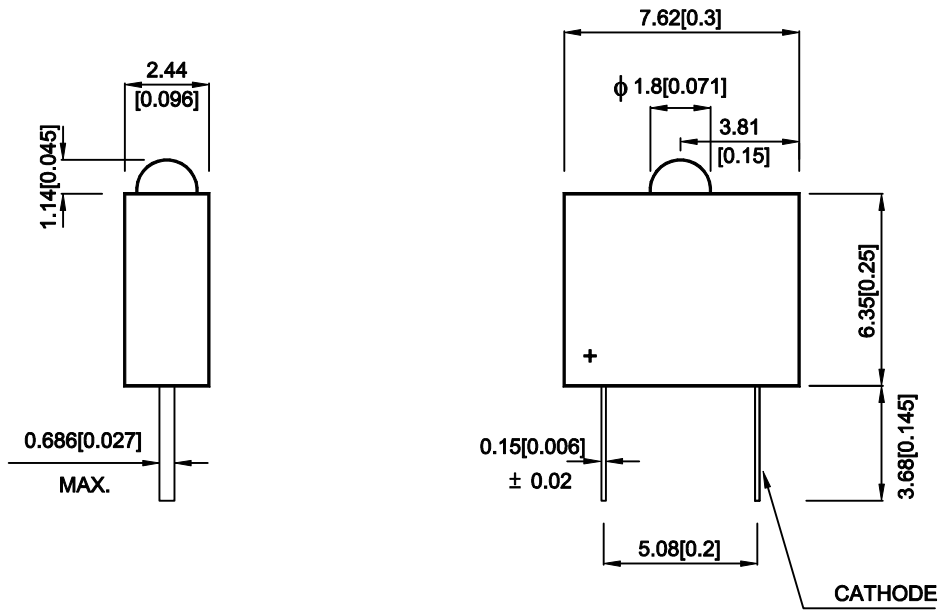

UNIT : MM[INCH]  
TOLERANCE : ± 0.25[± 0.01] UNLESS OTHERWISE NOTED.

Dice	Condition	Peak Emission Wavelength			UNIT
		Min.	Typ.	Max.	
HIGH EFFICIENCY RED (GaAsP/GaP)	I <sub>F</sub> =20mA	-	625	-	nm

**Selection Guide**

Part No.	Dice	Lens Type	I <sub>v</sub> (mcd) V=14V		Viewing Angle
			Min.	Typ.	2θ 1/2
AM2520EJ/ID14V	HIGH EFFICIENCY RED (GaAsP/GaP)	RED DIFFUSED	6	10	60°

APPROVED: J.Lu	CHECKED: J. Chao	DRAWN : L.N. Sheu	SCALE : 3 : 1	DATA NO. : F6756 DATE : JUN/28/2000	V.1
-------------------	---------------------	----------------------	------------------	--	-----