

RADIO MODULE

MTX-705/15/35

FSK/ASK TRANSMITTER MODULE

Supports the follow parts:

MTX-705
MTX-715
MTX-735

PRELIMINARY

DATA SHEET

Radios, Inc.


April 14, 2006 Preliminary Data Sheet

MTX-705/15/35

FSK/ASK TRANSMITTER MODULE

The MTX-705/15/35 FSK/ASK transmitter is designed for applications in the 315 MHz, 433 MHz, or 868 MHz industrial-scientific-medical (ISM) band, according to the EN 300 220 telecommunications standard; but it can also be used in any other country with similar frequency bands.

The MTX-705/15/35 transmitter consists of a fully integrated voltage-controlled oscillator, a divide-by-32 divider, a phase-frequency detector and a charge pump. An internal loop filter determines the dynamic behavior of the PLL and suppresses reference spurious signals. A Colpitts crystal oscillator is used as the reference oscillator of a phase-locked loop synthesizer. The VCO's output signal feeds the power amplifier.

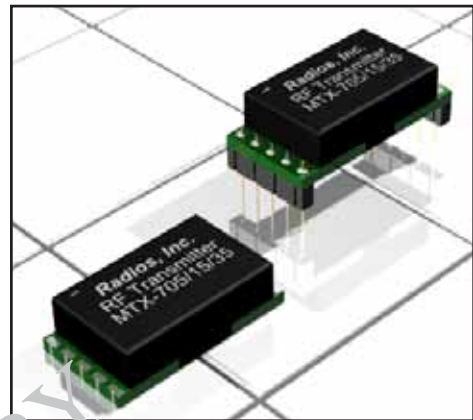

Key Features

- Fully integrated PLL-stabilized VCO
- Frequency range from 250-350MHz, 380-450MHz, or 850-930MHz
- Single-ended RF output
- FSK through crystal pulling allows modulation from DC to 40 kbit/s
- High FSK deviation possible for wideband data transmission
- ASK achieved by on/off keying of internal power amplifier up to 40 kbit/s
- Very low standby current
- On-chip low voltage detector
- High over-all frequency accuracy
- FSK deviation and center frequency independently adjustable
- Adjustable output power range: -11 to +10 dBm
- Adjustable current consumption: 3.4 to 10.6 mA

Typical Applications

- General digital data transmission
- Tire Pressure Monitoring System (TPMS)
- Remote Keyless Entry (RKE)
- Low-power telemetry
- Alarm and security systems
- Garage door openers
- Home automation

PRODUCT ORDER INFORMATION

Part Number	Description
MTX-705(D)(S)	TH72005 FSK/ASK Module Transmitter
MTX-715(D)(S)	TH72015 FSK/ASK Module Transmitter
MTX-735(D)(S)	TH72035 FSK/ASK Module Transmitter


Contact Information

Radios, Inc. P.O. Box 1304 North Wales, PA 19454	Phone: 215-362-1899 Fax: 215-362-2214 Email: sales@radiosinc.com
--	--

MTX-705/15/35

FSK/ASK TRANSMITTER MODULE

Mechanical and Pin Diagram

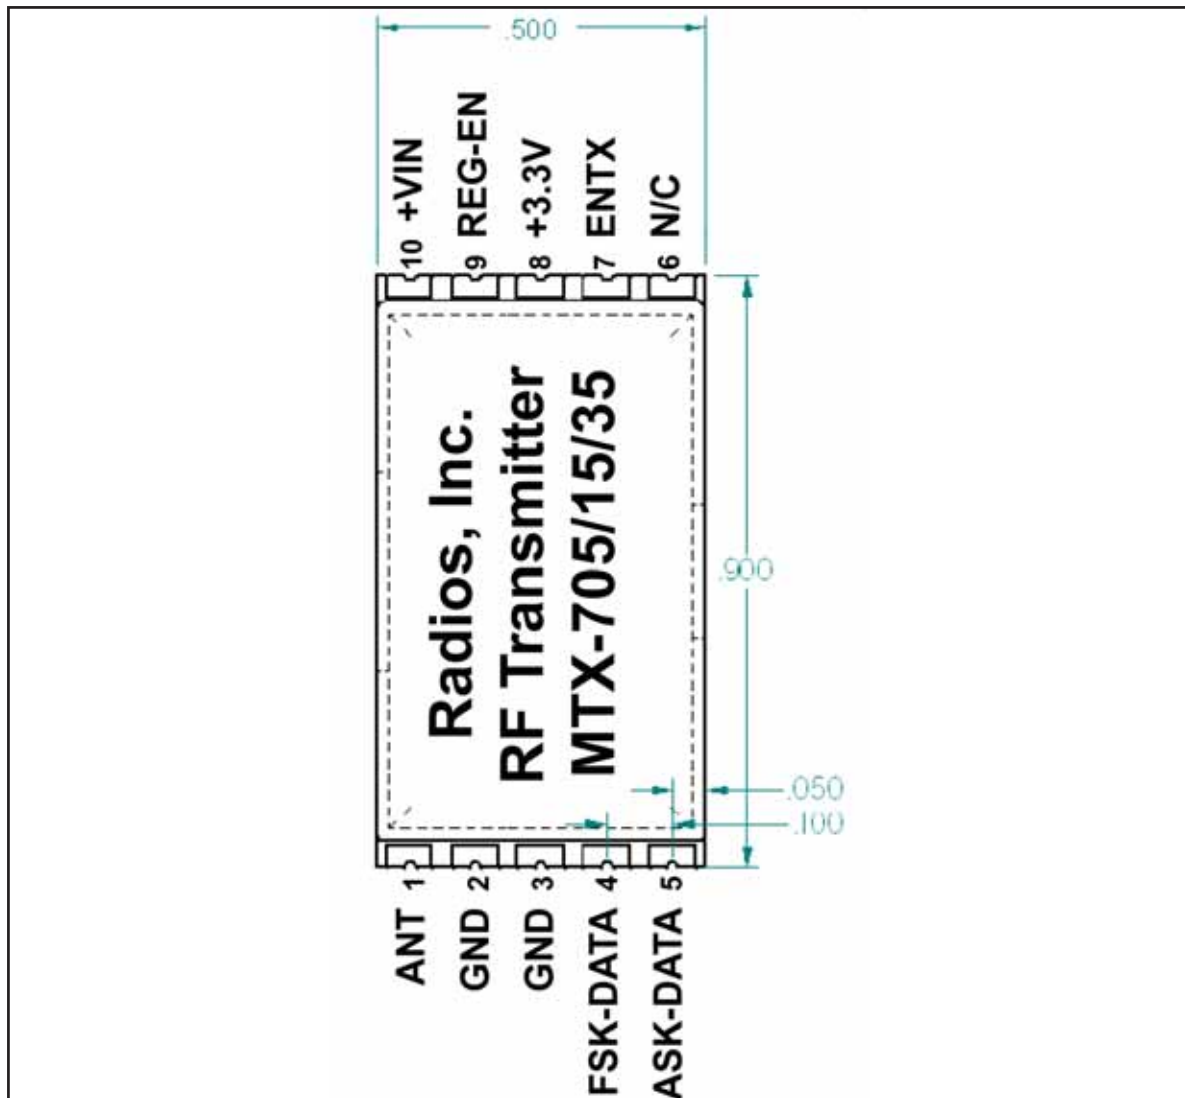

Pin Description

Pin Num	Pin Name	Description	Pin Num	Pin Name	Description
Pin 1	Ant	RF Output	Pin 6	+VIN	Supply Voltage
Pin 2	Gnd	Ground	Pin 7	REG-EN	Regulator Enable
Pin 3	Gnd	Ground	Pin 8	+3.3V	Regulated Output
Pin 4	FSK-DATA	FSK Data Input	Pin 9	ENTX	Bandwidth Selection Bit 0
Pin 5	ASK-DATA	ASK Data Input	Pin 10	N/C	No Connect

MTX-705/15/35

FSK/ASK TRANSMITTER MODULE

Electrical Limits

Sym	Parameters	Min	Typ	Max	Unit	Notes
Absolute Maximum Ratings						
VDD	Supply Voltage	-20		20	V	
	Storage Temperature Range	-65		150	°C	
	Lead Temperature		260		°C	
V _{EN}	Enable Input Voltage	-20		+20	V	
Operating Ratings						
	Supply Voltage	2.5		16	V	
V _{EN}	Enable Input Voltage	0		TBD	V	
TA	Ambient operating temperature	-40		125	°C	

Electrical Characteristics

This device is ESD sensitive. Do not operate or store near strong electrostatic fields. Use appropriate ESD precautions. All voltages are with respect to Ground.

Parameters	Test Conditions	Min	Typ	Max	Unit
Operating Conditions					
Input Low Voltage	ENTX, DATA pins			0.3VCC	V
Input High Voltage	ENTX, DATA pins	0.7VCC			V
XOSC Frequency	MTX-705	9		10.9	MHz
	MTX-715	11.9		14	MHz
	MTX-735	26.6		29	MHz
VCO Frequency	MTX-705	290		350	MHz
	MTX-715	380		450	MHz
	MTX-735	850		930	MHz
FSK Deviation	MTX-705	±2.5		±30	kHz
	MTX-715	±2.5		±40	kHz
	MTX-735	±2.5		±60	kHz
FSK Data Rate	NRZ			40	kbit/s
ASK Data Rate	NRZ			40	kbit/s
Operating Currents					
Standby Current	ENTX=0, 85°C		0.2	200	nA
	ENTX=0, 125°C			4	µA
Supply Current - MTX-705/15		7.3	10.6	13.3	mA
Supply Current - MTX-735		9.4	13.4	17.3	mA
Digital Pin Characteristics					
Input Low Voltage CMOS	ENTX, DATA pins	-0.3		0.3VCC	V
Input High Voltage CMOS	ENTX, DATA pins	0.7VCC		VCC+0.3	V
Pull Down Current ENTX pin	ENTX=1	0.2	2	20	µA
Low Level Input Current ENTX pin	ENTX=0			0.02	µA
High Level Input Current DATA pins	FSK/ASK-DATA=1			0.02	µA
Pull Up Current DATA pins active	FSK/ASK-DATA=0, ENTX=1	0.1	1.5	12	µA
Pull Up Current DATA pins standby	FSK/ASK-DATA=0, ENTX=0			0.02	µA
FSK Switch Resistance					
MOS Switch On Resistance	FSK-DATA=0, ENTX=1		20	60	Ohm
MOS Switch Off Resistance	FSK-DATA=1, ENTX=1	1			MOhm

MTX-705/15/35

FSK/ASK TRANSMITTER MODULE

Electrical Characteristics - CONT.

Power Select Characteristics					
Power Select Current	ENTX=1	7	8.6	9.9	μA
Power Select Voltage	ENTX=1	1.47			V
Low Voltage Detection Characteristic					
Low Voltage Detect Threshold	ENTX=1	1.75	1.85	1.95	V
CW Spectrum Characteristics					
Output Power MTX-705	ENTX=1		7.6		dBm
Output Power MTX-715	ENTX=1		7.1		dBm
Output Power MTX-735	ENTX=1		6.7		dBm
Phase Noise	@ 200kHz offset		-88	-83	dBc/Hz
Spurious Emissions According to EN 300 220-1 (2000.09) table 13	47MHz < f < 74MHz			-54	dBm
	87.5MHz < f < 118MHz				
	174MHz < f < 230MHz				
	470MHz < f < 862MHz, B=100kHz				
	f < 1GHz, B=100kHz			-36	dBm
	f > 1GHz, B=1MHz			-30	dBm
Start-up Parameters					
Start-up Time	from standby to transmit mode		0.8	1.2	ms
Frequency Stability					
Frequency Stability vs. Supply Voltage				±3	ppm
Frequency Stability vs. Temperature	crystal at constant temperature			±10	ppm
ENABLE Input					
Enable Input Logic-Low Voltage(V _{IL})	regulator shutdown			0.4	V
				0.18	V
Enable Input Logic-High Voltage(V _{IH})	regulator enabled	2.0			V
Enable Input Current	V _{IL} </= 0.4V		0.01	-1	μA
	V _{IL} </= 0.18V			-2	μA
	V _{IH} = 2.0V	2	5	20	μA
	V _{IH} = 2.0V			25	μA

Note 1. Exceeding the absolute maximum rating may damage the device.

Note 2. The device is not guaranteed to function outside its operating rating.

Note 3. Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF.

MTX-705/15/35

FSK/ASK TRANSMITTER MODULE

Product Warranty and Disclaimer Information:

Radios, Inc. is dedicated to providing its customers with the best possible products, and is continually working on improving the quality and function of its entire product line. Therefore, Radios, Inc. reserves the right to make changes to the design, specifications, or manufacturing of its products without notice. The information contained in this data sheet is believed to be complete, accurate, and reliable as of the time of publication. Because product specifications are based on representative lot samples, however, values can vary from lot to lot and are not guaranteed. Radios, Inc. does not assume any liability or responsibility arising from the application or use of any product described herein, and makes no guarantee, warranty, or representation regarding the suitability or legality of any product for use in a specific application. Radios, Inc. does not assume any liability for any infringement of patents or other rights of third parties which may result from the use of its products. No product sold by Radios, Inc. is intended for use in a life critical application, or an application where the safety of property is at risk. The user assumes full and complete responsibility for any use of Radios, Inc.'s products in an application where the safety of life or property is at stake.

A product can be returned directly to Radios, Inc. for evaluation. All returns must have a valid RMA number attached. RMA numbers can be obtained by calling customer service at Radios, Inc. If a product is found to be defective and is returned within 90 days of purchase, Radios, Inc. may repair or replace, at its option, said defective product. This warranty does not apply to products which have been disassembled, modified, or subjected to conditions exceeding the application specifications. Under no conditions will Radios, Inc. be responsible for losses arising from the use or failure of a device in any application or for losses arising from failure to meet delivery requirements, other than the repair, replacement, or refund limited to the original product purchase price. No other warranties, express, implied, or statutory, including warranty of fitness for a particular purpose, apply.

MTX-705/15/35

FSK/ASK TRANSMITTER MODULE

Technical Support:

Radios Inc. is committed to providing its customers with excellent technical support and the resources necessary to assist its customers with their product development. Customers have several options to obtain assistance. First, any questions or concerns can be e-mailed to Radios Inc. at information@radiosinc.com. We monitor our e-mail daily, and will respond to all questions promptly. Additionally, to speak directly to a technical support representative, customers may call Radios Inc. at 215-362-1899.

Copyright:

Radios Inc. reserves the right to all proprietary or commercial information contained in this data sheet. This data sheet is protected by copyright, and any unauthorized copying, reproduction, or dissemination is strictly prohibited without the prior written approval of Radios Inc.

Editorial Information:

	(Date)
Last Updated	April 14, 2006PRELIMINARY